


GBJ25005 THRU GBJ2510

Glass Passivated Bridge Rectifier

Voltage Range - 50 to 1000 Volts Current - 25.0 Ampere

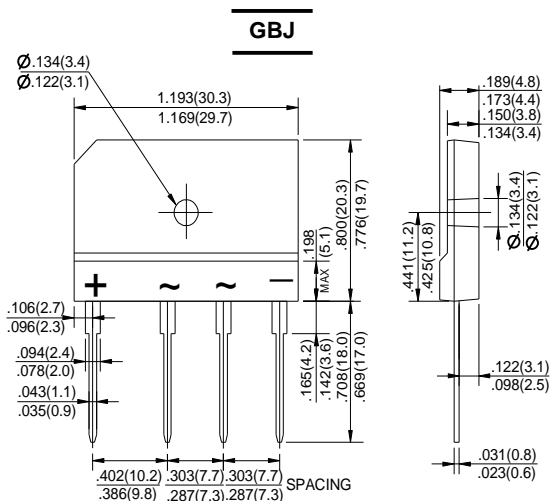

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic material has UL flammability classification 94V-0
- ◆ High surge forward current capability
- ◆ Low forward voltage drop
- ◆ Reliable low cost construction utilizing molded plastic technique results in inexpensive product

MECHANICAL DATA

Case: Molded plastic body
Lead: Solder plated
Polarity: As marked

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load derate current by 20%

CHARACTERISTICS	SYMBOL	GBJ 25005	GBJ 2501	GBJ 2502	GBJ 2504	GBJ 2506	GBJ 2508	GBJ 2510	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ T _C =100°C (with heatsink Note 2)	I _(AV)	25.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}	4.2							A
Maximum Forward Voltage at 12.5A DC	V _F	350							V
Maximum DC Reverse Current @ T _J =25°C at Rated DC Blocking Voltage @ T _J =125°C	I _R	1.1							µA
I ² t Rating for Fusing (t<8.3ms)	I ² t	500							A ² s
Typical Junction Capacitance Per Element (Note1)	C _J	85							pF
Typical Thermal Resistance (Note2)	R _{JC}	0.6							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 300mm*300mm*1.6mm cu plate heatsink.

RATINGS AND CHARACTERISTIC CURVES GBJ25005 THRU GBJ2510

FIG.1-FORWARD CURRENT DERATING CURVE

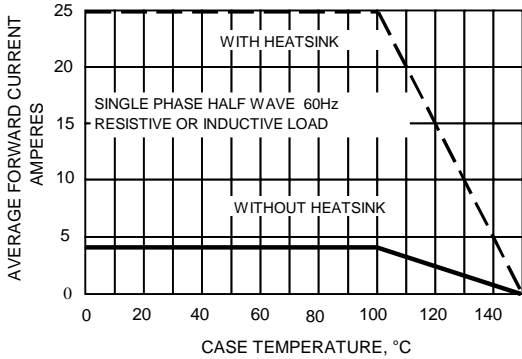


FIG.2-MAXMUN NON-REPETITIVE SURGE CURRENT

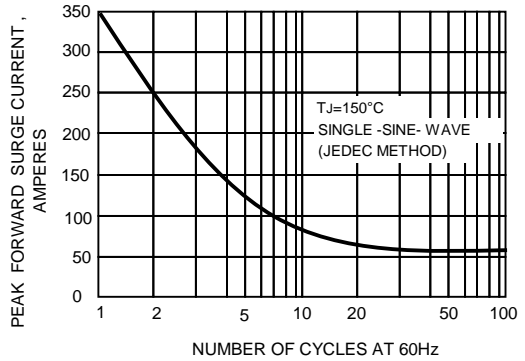


FIG.3-TYPICAL JUNCTION CAPACITANCE

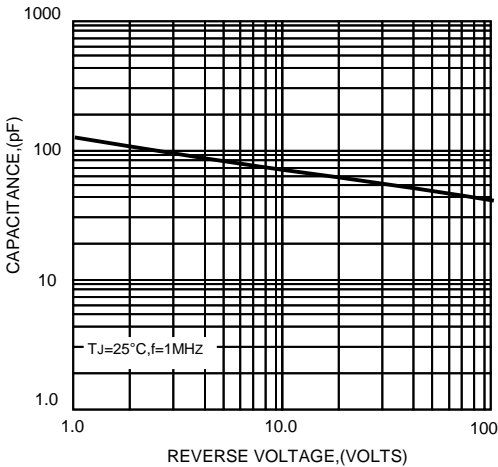


FIG.4-TYPICAL FORWARD CHARACTERISTICS

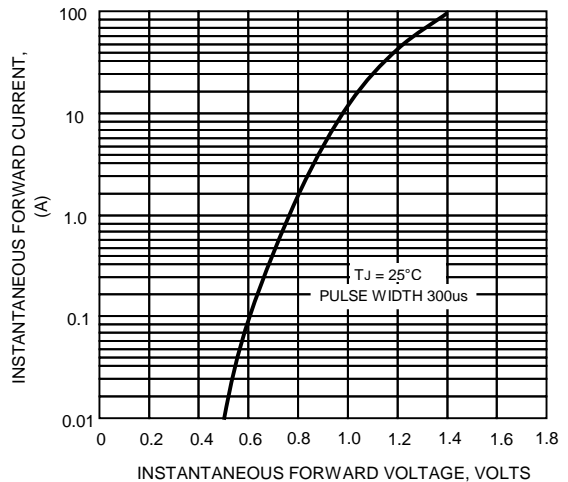


FIG.5-TYPICAL REVERSE CHARACTERISTICS

