STARSEA

MG160TB16E1

RoHS COMPLIANT



Rectifier/ Brake-chopper Modules

V_{CES} 1600V
I_F 150A


Applications

- Active Rectifier
- Half Controlled B6-bridge

Features

- Copper Base Plate
- Al_2O_3 Substrate with Low Thermal Resistance
- High Power Density
- High mechanical robustness

Circuit



● Thyristor-rectifier

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	V_{GE}=0V, I_C =1mA, T_{vj}=25℃	1600	V
Maximum RMS forward current per chip	I_{FRMSM}	T_C=80℃	160	A
Surge forward current	I_{FSM}	V_R=0V,t_p=10ms,T_{vj}=25℃	1550	A
		V_R=0V,t_p=10ms,T_{vj}=125℃	1300	A
I^2t-value	I^2t	V_R=0V,t_p=10ms,T_{vj}=25℃	12000	A^2s
		V_R=0V,t_p=10ms,T_{vj}=125℃	8450	A^2s
Critical rate of rise of on-state current	di/dt	f=50Hz,iG=0.6A, di_G/dt=0.6A/μs	100	A/us
Critical rate of rise of on-state voltage	dv/dt	T_{vj}=125℃,V_D=0.67V_{DRM}	1000	V/us

Thyristor-rectifier

Characteristic Values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	Tvj=125℃,I_F=150A		1.15		V
Threshold voltage	$V_{(TO)}$	T_{vj}=125℃		0.85		V
Reverse current	I_{RRM}/I_{DRM}	T_{vj}=125℃		5		mA
Slope resistance	r_T	T_{vj} =125℃		3.2		mΩ
Gate trigger voltage	V_{GT}	T_{vj}=25℃,V_D=6V			2.0	V
Gate trigger current	I_{GT}	T_{vj}=25℃,V_D=6V			100	mA
Gate non-trigger voltage	V_{GD}	T_{vj} =125℃,V_D=0.5V_{DRM}			0.3	V
Gate non-trigger current	I_{GD}	T_{vj} =125℃,V_D=0.5V_{DRM}			3.0	mA
Latching current	I_L	T_{vj} =25℃,RG=33Ω			550	mA
Holding current	I_H	T_{vj} =25℃,V_D=6V			220	mA
Gate controlled delay time	t_{gd}	T_{vj} =25℃, I_G=0.6A, di_G/dt=0.6A/us			1.2	us
Circuit commutated turn-off time	t_q	T_{vj}=125℃		150		us

Diode-Rectifier

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	T_{vj}=25℃	1600	V
Average output Current 50/60Hz, sine wave	$I_{F(AV)}$	T_C=100℃	150	A
Maximum RMS Current at Rectifier Output	I_{RMSM}	T_C=100℃	180	A
Surge Forward Current	I_{FSM}	V_R=0V,t_p=10ms,T_{vj}=25℃	1600	A
		V_R=0V,t_p=10ms,T_{vj}=125℃	1400	A
I^2t-value	I^2t	V_R=0V,t_p=10ms,T_{vj}=25℃	13000	A^2s
		V_R=0V,t_p=10ms,T_{vj}=125℃	9500	A^2s

Characteristic Values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Diode Forward Voltage	V_F	I_F=150A,T_{vj}=125℃		1.2		V
Reverse Current	I_R	T_{vj}=125℃,V_R=1600V			2.0	mA

IGBT-brake-chopper

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Collector-Emitter Voltage	V_{CES}	V_{GE}=0V, I_C =1mA, T_{vj}=25℃	1200	V
Continuous Collector Current	I_C	T_C=100℃, T_{vjmax}=175℃	100	A
Repetitive Peak Collector Current	I_{CRM}	t_p=1ms	200	A
Gate-Emitter Voltage	V_{GES}	T_{vj}=25℃	±20	V
Total Power Dissipation	P_{tot}	T_C=25℃ T_{vjmax}=175℃	515	W

Characteristic Values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	V_{GE}=V_{CE}, I_C=3.3mA,T_{vj}=25℃	5.0	5.8	6.5	V
Collector-Emitter Cut-off Current	I_{CES}	V_{CE}=1200V,V_{GE}=0V, T_{vj}=25℃			1.0	mA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=100A,V_{GE}=15V, T_{vj}=25℃		1.85		V
		I_C=100A,V_{GE}=15V, T_{vj}=125℃		2.15		
		I_C=100A,V_{GE}=15V, T_{vj}=150℃		2.25		
Gate Charge	Q_G			0.78		uC
Internal Gate Resistance	R_{gint}			7.5		Ω
Input Capacitance	C_{ies}	V_{CE}=25V, V_{GE}=0V, f=1MHz, T_{vj}=25℃		6.8		nF
Reverse Transfer Capacitance	C_{res}			0.32		nF
Gate-Emitter leakage current	I_{GES}	V_{CE}=0V, V_{GE}=20V,T_{vj}=25℃			400	nA
Turn-on Delay Time	$t_{d(on)}$	I_C=100A V_{CE}=600V V_{GE} = ±15V R_G=5.6Ω T_{vj}=25℃		160		ns
Rise Time	t_r			45		ns
Turn-off Delay Time	$t_{d(off)}$			215		ns
Fall Time	t_f			54		ns
Energy Dissipation During Turn-on Time	E_{on}			9.2		mJ
Energy Dissipation During Turn-off Time	E_{off}			5.8		mJ

Turn-on Delay Time	$t_{d(on)}$	I_C=100A V_{CE}=600V V_{GE}=±15V R_G=5.6Ω T_{vj}=150℃		198		ns
Rise Time	t_r			64		ns
Turn-off Delay Time	$t_{d(off)}$			375		ns
Fall Time	t_f			72		ns
Energy Dissipation During Turn-on Time	E_{on}			14.5		mJ
Energy Dissipation During Turn-off Time	E_{off}			10.5		mJ
SC Data	I_{sc}	t_p≤10us,V_{GE}=15V,T_{vj}=150℃, V_{CC}=900V,V_{CEM}≤1200V		500		A

● Diode-Brake-Chopper

Absolute Maximum Ratings

Parameter	Symbol	Conditions	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	T_{vj}=25℃	1200	V
Continuous DC Forward Current	I_F		60	A
Repetitive Peak Forward Current	I_{FRM}	t_p=1ms	120	A

Characteristic Values

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	I_F=60A,T_{vj}=25℃		1.85		V
		I_F=60A,T_{vj}=125℃		1.70		
		I_F=60A,T_{vj}=150℃		1.60		
Recovered Charge	Q_{rr}	I_F=60A V_R=600V -di$_F$/dt =900A/us T_{vj}=25℃		4.39		uC
Peak Reverse Recovery Current	I_{rr}			31		A
Reverse Recovery Energy	E_{rec}			1.35		mJ
Recovered Charge	Q_{rr}	I_F=60A V_R=600V -di$_F$/dt =900A/us T_{vj}=150℃		6.65		uC
Peak Reverse Recovery Current	I_{rr}			33		A
Reverse Recovery Energy	E_{rec}			2.10		mJ

Module Characteristics

T_C=25°C unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			Min.	Typ.	Max.	
Isolation Voltage	V_{isol}	t=1min,f=50Hz	2500			V
Maximum Junction Temperature	T_{jmax}	inverter,brake-chopper			175	℃
		rectifier			125	℃
Operating Junction Temperature	$T_{vj\ op}$	inverter,brake-chopper	-40		150	℃
		rectifier	-40		125	℃
Storage Temperature	T_{stg}		-40		125	℃
Stray-inductance-module	L_{SCE}			50		nH
Thermal Resistance Junction to Case	$R_{\theta JC}$	per Thyristor-rectifier			0.30	K/W
		per Diode-rectifier			0.35	
		per IGBT-brake-chopper			0.29	
		per Diode-brake-chopper			0.85	
Thermal Resistance Case to Sink	$R_{\theta CS}$	per Module		0.02		K/W
Module-to-Sink Torque	Ms		3.0		6.0	N·m
Weight of Module	G			175		g

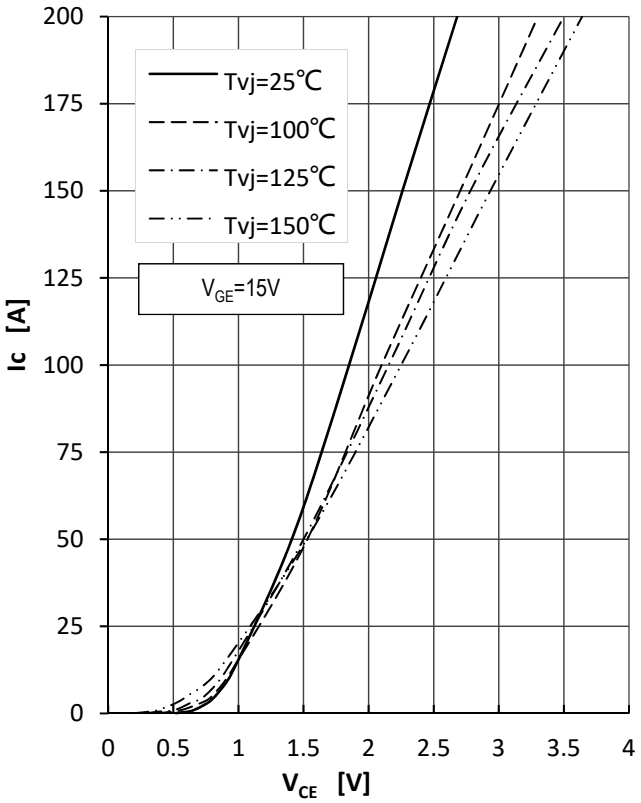


Fig1.IGBT-brake-chopper Output Characteristics

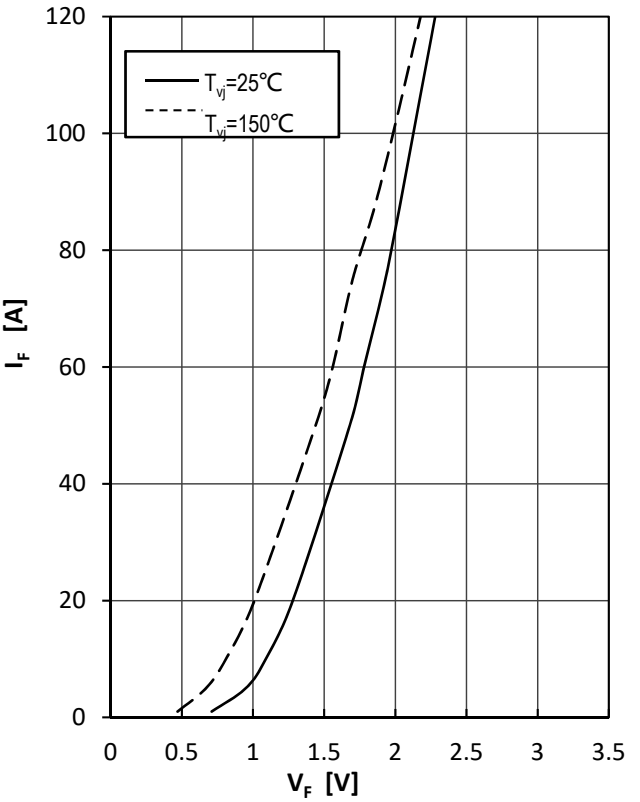


Fig2.Diode-brake-chopper Foward Characteristics



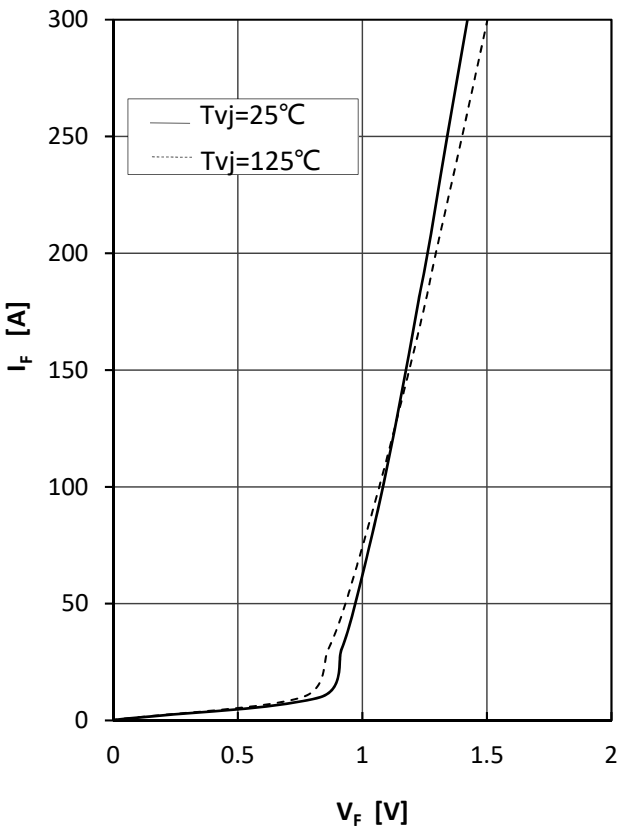


Fig3.Diode-rectifier Foward Characteristics

- Circuit Diagram

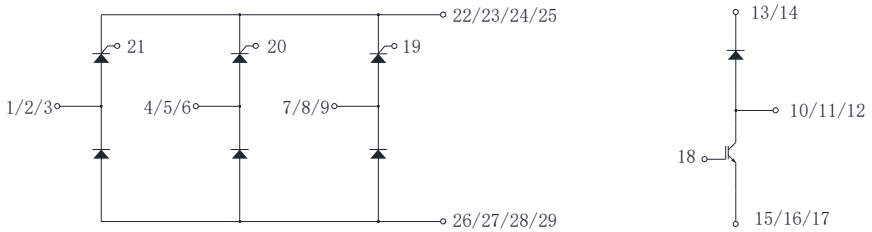

- **Package Outline Information**

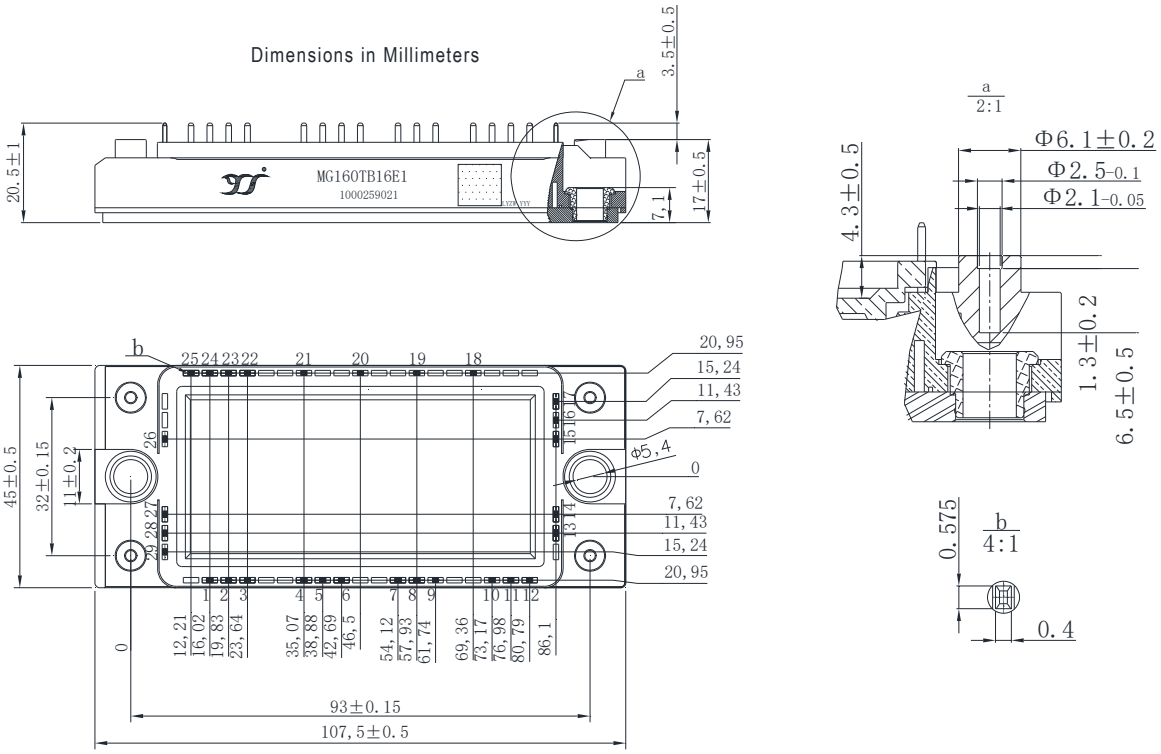

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.