

ESD Protection Diode

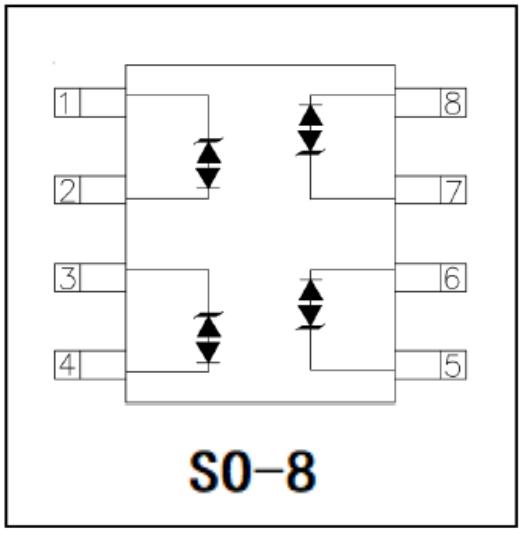

Features

- ●Protects two line pairs (four lines)
- ●Ultra low leakage: nA level
- ●Low operating voltage: 2.8V
- ●Moisture Sensitivity: Level 3 per J-STD-020
- ●JEDEC SO-8 package
- ● Marking:



2804 = Device Marking Code
Dot denotes Pin1

■Maximum Ratings(TA=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STG}	-55 to +150	℃
IEC61000-4-2(ESD)Air	V_{ESD}	±30	KV
IEC61000-4-2(ESD)Contact		±30	KV
Peak Pulse Power	P_{PK}	100	W
Peak Pulse Current	I_{PP}	10	A


■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Working Voltage	V_{RWM}	V				2.8
Reverse Leakage Current	I_R	uA	VRWM=2.8V			0.05
Punch-Through Voltage	$V_{(PT)}$	V	I_T=2uA	3.5		
Snap-Back Voltage	$V_{(SB)}$	V	I_T=50mA	2.8		
Clamping Voltage	V_C	V	I_{PP}=1A(8 x 20μs pulse)			5.5
Clamping Voltage	V_C	V	I_{PP}=10A(8 x 20μs pulse)			10
Variation in Capacitance With reverse Bias		pF	Pin 1,8 to 2,7 and 3,6 to 4,5 V_R=0 to 2.8V f=1MHz		1.3	
Junction Capacitance	C_J	pF	Pin 1,8 to 2,7 and 3,6 to 4,5 V_R= 2.8V f=1MHz		4.5	6


■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	AU2804S8
Thermal Resistance(Typical)	$R_{\theta J-A}$	℃/W	184
	$R_{\theta J-C}$	℃/W	74


■ Characteristics (Typical)

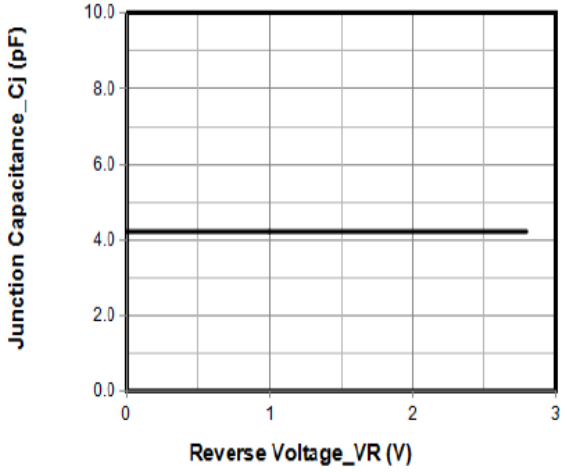


Junction Capacitance vs. Reverse Voltage

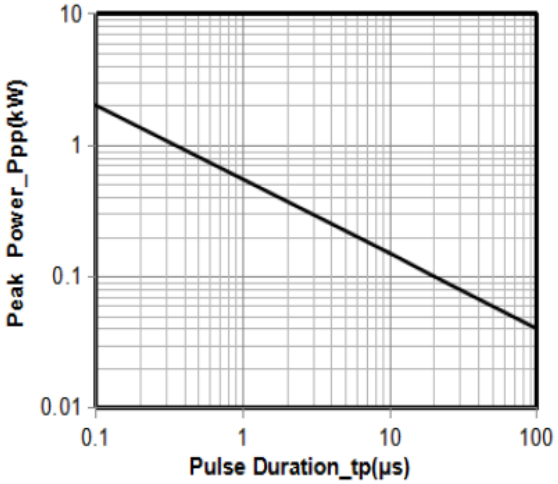


Peak Pulse Power vs. Pulse Time

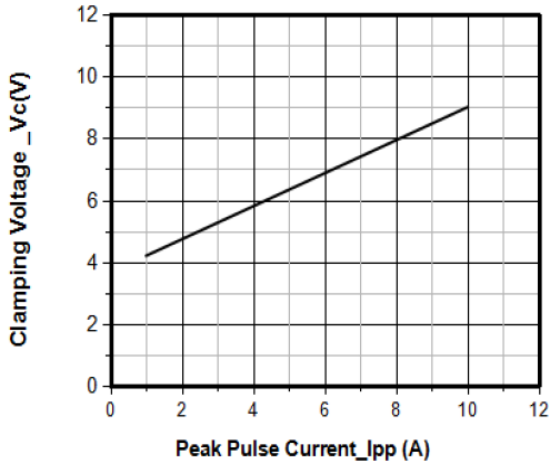


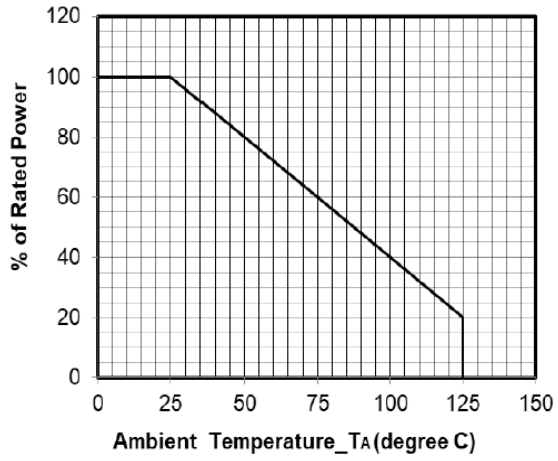

Power Derating Curve

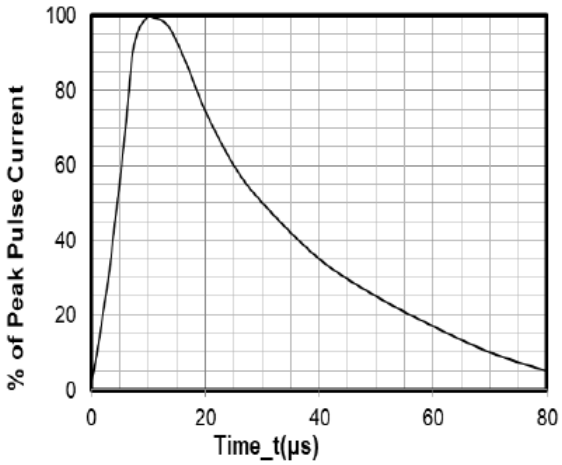

8 X 20μs Pulse Waveform

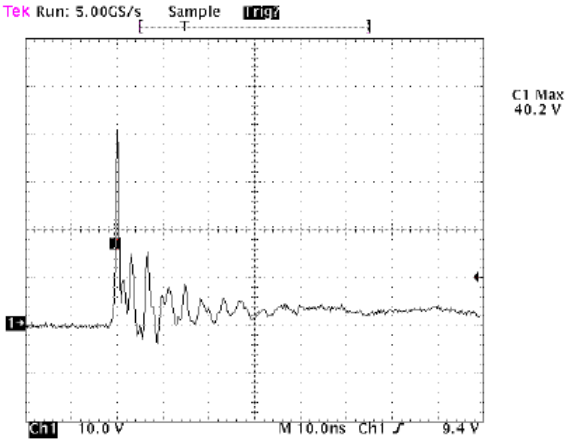


Note：Data is taken with a 10x attenuator

ESD Clamping Voltage


8 kV Contact per IEC61000−4−2

■ Outline Dimensions

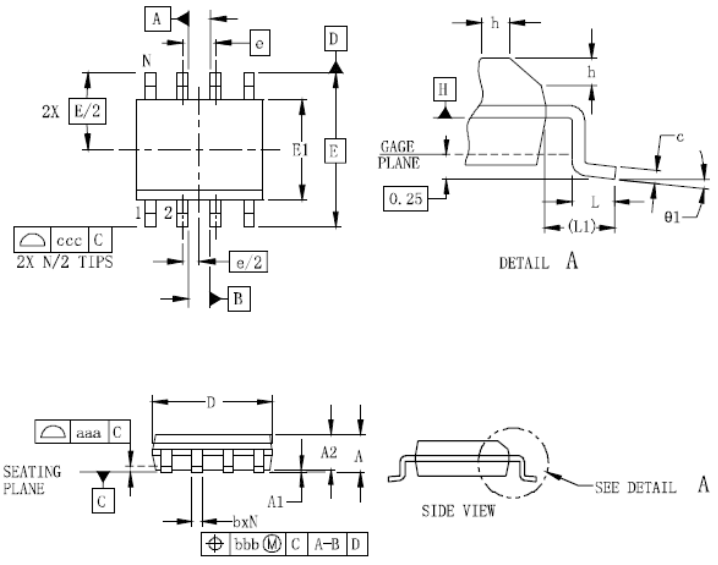

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.004		0.010
A2	1.25		1.65	0.049		0.065
b	0.31		0.51	0.012		0.020
c	0.17		0.25	0.007		0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E1	3.80	3.90	4.00	0.150	0.154	0.157
E	6.00 BSC			0.236 BSC		
e	1.27 BSC			0.050 BSC		
h	0.25		0.50	0.010		0.020
L	0.40	0.72	1.04	0.016	0.028	0.041
L1	(1.04)			(0.041)		
N	8			8		
θ1	0°		8°	0°		8°
aaa	0.10			0.004		
bbb	0.25			0.010		
ccc	0.20			0.008		

■ Soldering Footprint



SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	(5.20)	0.205
G	3.00	0.118
P	1.27	0.050
X	0.60	0.024
Y	2.20	0.087
Z	7.40	0.291

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.