
1-Line, Uni-directional, Transient Voltage Suppressor



Pin Configuration

SOT-353

Features


- Ultra small package
- Stand-off voltage: 5V Max
- Transient protection for each line according to
  IEC61000-4-2(ESD): ±30kV (contact)
  IEC61000-4-5(surge): 8A (8/20μs)
- Low leakage current
- Low clamping voltage
- RoHS Compliant

Applications

- Peripherals
- Industrial Equipment
- Notebook Computers
- Portable Instrumentation
- Microprocessor Based Equipment
- Cell Phone Handsets and Accessories
- Personal Digital Assistants (PDAs) and Pagers


Mechanical Characteristics

- Package: SOT-353
- Case Material: “Green” Molding Compound.
- Marking Information: See Below



F05 = Device Marking Code
Dot denotes Pin1

■Definitions of electrical characteristics

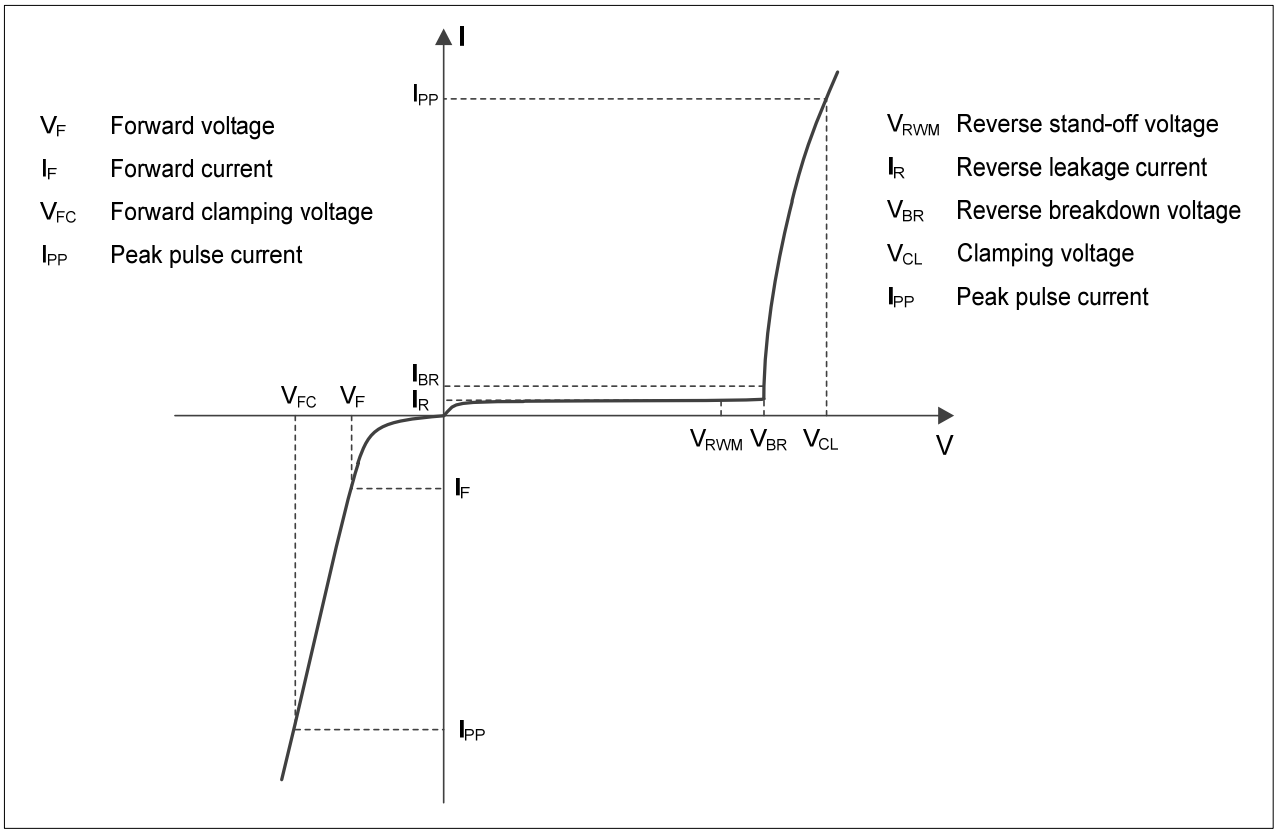

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	Rating	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	96	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	8	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±30	KV
ESD according to IEC61000-4-2 contact discharge		±30	KV
Junction temperature	T_J	-55~125	°C
Storage temperature	T_{STG}	-55~150	°C

■Electrical Characteristics (T_a=25℃ Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V				5
Reverse leakage current	I_R	μA	V_{RWM} =5V			0.2
Reverse breakdown voltage	V_{BR}	V	I_{BR} = 1mA	6		8.5
Clamping voltage [3]	V_{CL}	V	I_{PP} = 1A, t_p = 8/20μs			9
		V	I_{PP} = 8A, t_p = 8/20μs			12
Junction capacitance	C_J	pF	V_R = 0V, f = 1MHz		60	


(1). TLP parameter: Z_0 = 50Ω, t_p = 100ns, t_r = 2ns, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.
(2). Contact discharge mode, according to IEC61000-4-2.
(3). Non-repetitive current pulse, according to IEC61000-4-5.

■Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD0514T3	F2	Approximate 7	3000	30000	120000	7” reel

■ Typical Performance Characteristics (Ta=25℃ unless otherwise Specified)


8/20μs waveform per IEC61000-4-5

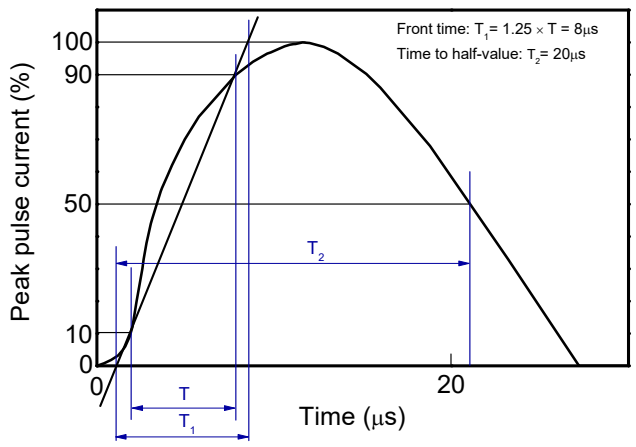


Contact discharge current waveform per IEC61000-4-2

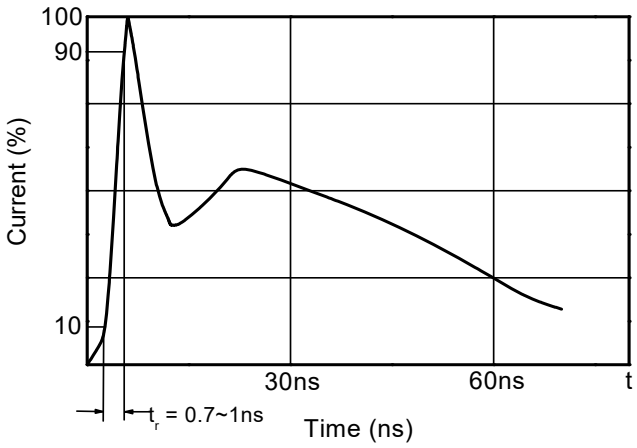


Clamping voltage vs. Peak pulse current

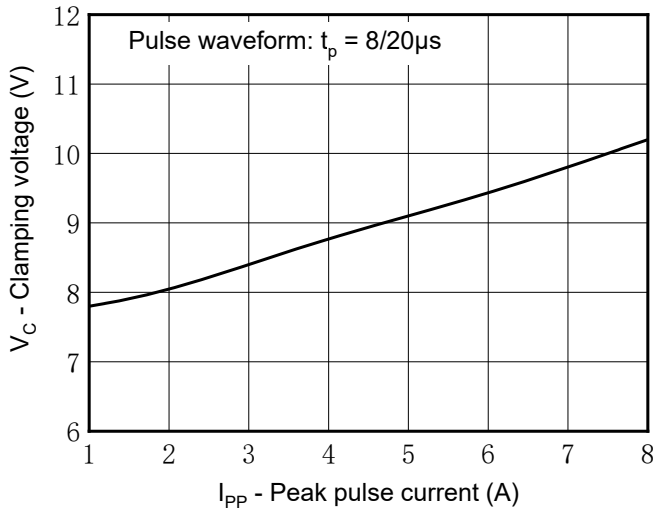


Capacitance vs. Reverse voltage

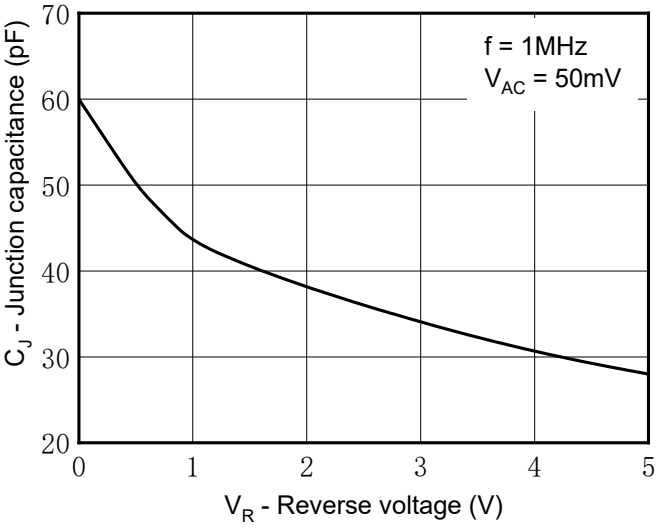


Non-repetitive peak pulse power vs. Pulse time

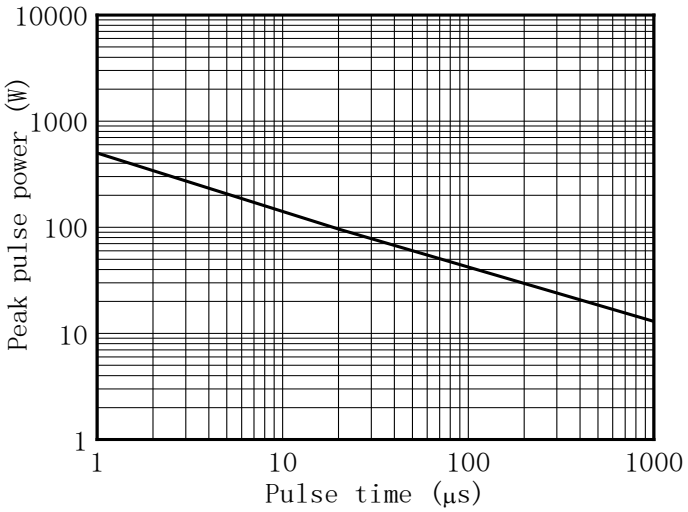

Power derating vs. Ambient temperature

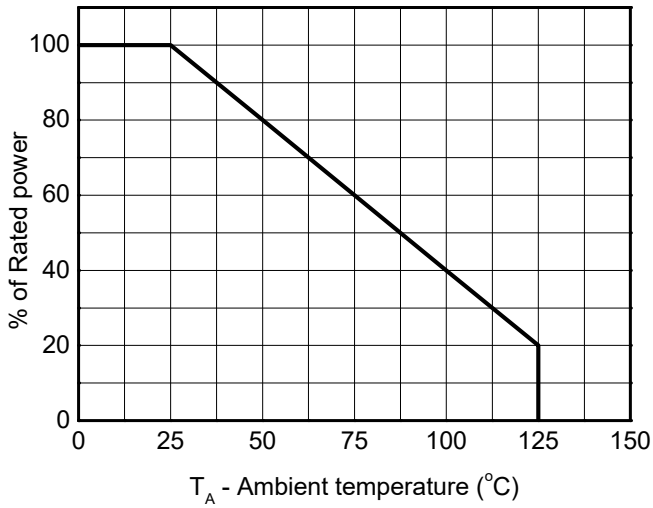


■ Outline Dimensions

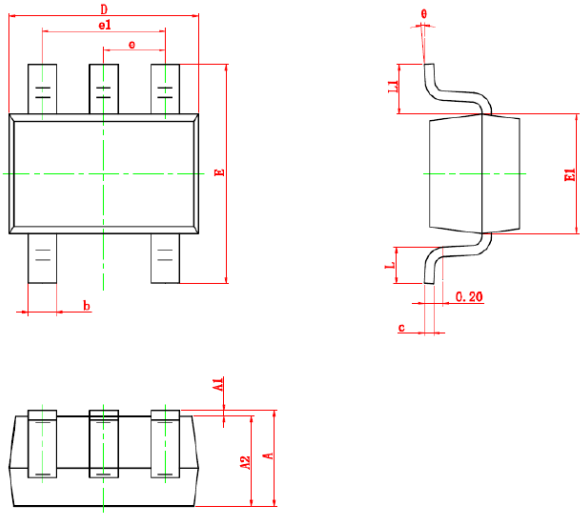

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0. 900	-	1.100	0.035	-	0.043
A1	0.000	-	0.100	0.000	-	0.004
A2	0.900	-	1.000	0.035	-	0.039
b	0.150	-	0.350	0.006	-	0.014
c	0.080	-	0.150	0.003	-	0.006
D	2.000	-	2.200	0.079		0.087
E	2.150	-	2.450	0.085	-	0.096
E1	1.150	-	1.350	0.045	-	0.053
e	0.650 TYP.			0.026 TYP.		
e1	1.200	-	1.400	0.047	-	0.055
L	0.260	-	0.460	0.010	-	0.018
L1	0.525 REF.			0.021 REF.		
θ	0°	-	8°	0°	-	8°

■ Recommend land pattern

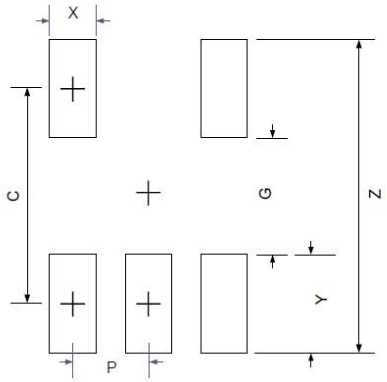

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	1.85	0.073
G	1.00	0.039
P	0.65	0.026
X	0.40	0.016
Y	0.85	0.033
Z	2.70	0.106

Notes:
This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.