
2-Line, Uni-directional, Transient Voltage Suppressor

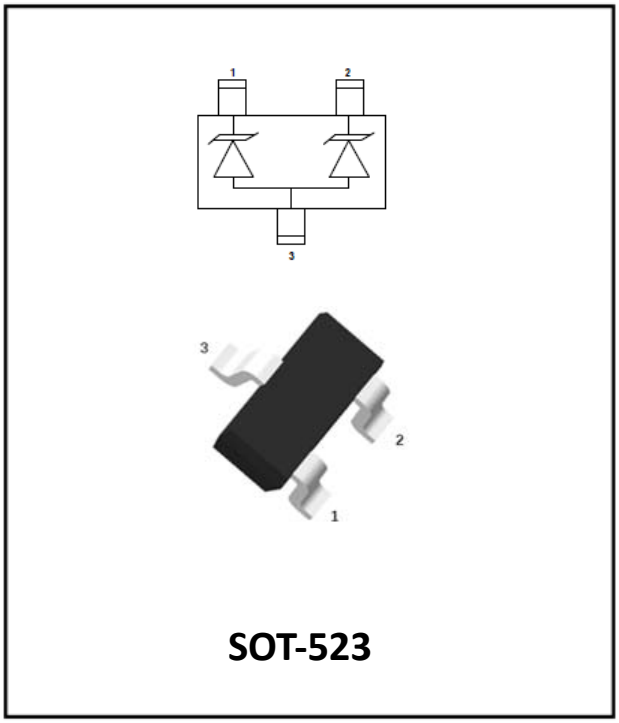

Features


- Stand-off voltage: 5V Max
- Transient protection for each line according to
  IEC61000-4-2(ESD): 20kV (contact)
  IEC61000-4-5(surge): 5A (8/20μs)
- Low leakage current:
- Ultra low clamping voltage
- RoHS Compliant

Applications

- Mobile Display Digital Interface (MDDI)
- USB 2.0
- Portable Instrumentation
- HBT Power Amplifier Protection
- Infiniband Transceiver Protection
- Firewire Ports


Mechanical Data

- Package: SOT-523
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound
- Marking Information: See Below



5B = Device Marking Code

■Definitions of electrical characteristics

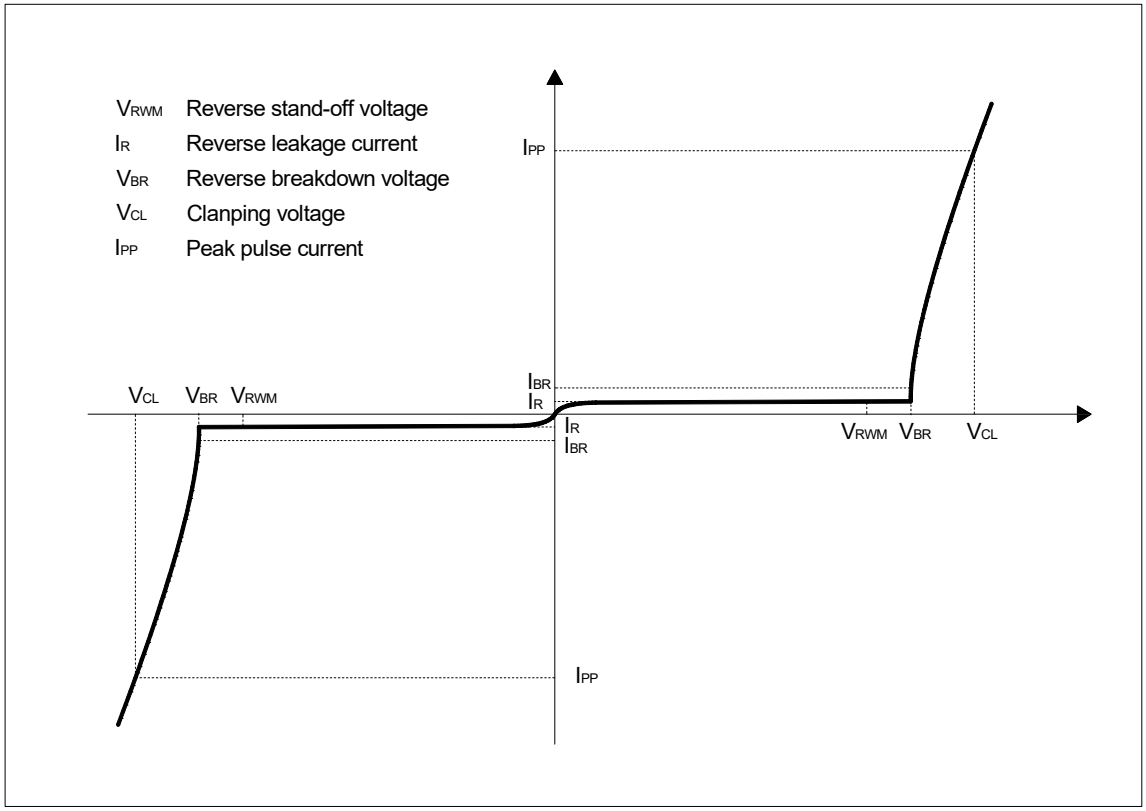

■Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	80	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±25	KV
ESD according to IEC61000-4-2 contact discharge		±20	
Junction temperature	T_J	-55~150	ºC
Storage temperature	T_{STG}	-55~150	ºC

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V	pin1 or pin2 to pin3 and between pin1 and pin 2			5
Reverse leakage current	I_R	μA	VRWM = 5V,pin1 or pin2 to pin 3 and between pin 1 and pin 2			0.5
Reverse breakdown voltage	V_{BR}	V	IT = 1mA,pin 1 or pin 2 to pin 3	6		
Clamping voltage [1)]	V_{CL}	V	IPP = 1A, tp = 8/20μs, pin 1 pin 2			9
		V	IPP = 5A, tp = 8/20μs, pin 1 or pin 2 to pin 3			16
Junction capacitance	C_J	pF	VR = 0V, f = 1MHz, pin 1 to pin 2		0.3	
Junction capacitance	C_J	pF	VR = 0V, f = 1MHz, pin 1 or pin 2 to pin 3		0.6	0.8

Notes:
(1). Non-repetitive current pulse, according to IEC61000-4-5.

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDSLC0502S5	F1	Approximate 2.7	3000	30000	120000	7” reel

■ Characteristics (Typical)

Fig.1 8/20μs waveform per IEC61000-4-5

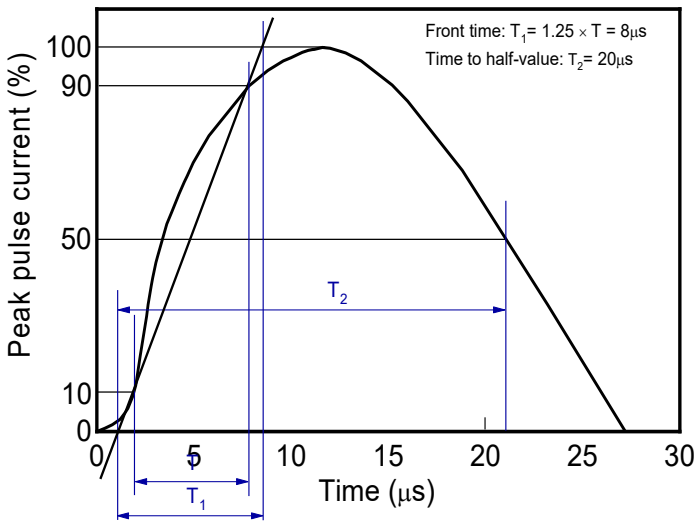


Fig.2 Contact discharge current waveform per IEC61000-4-2

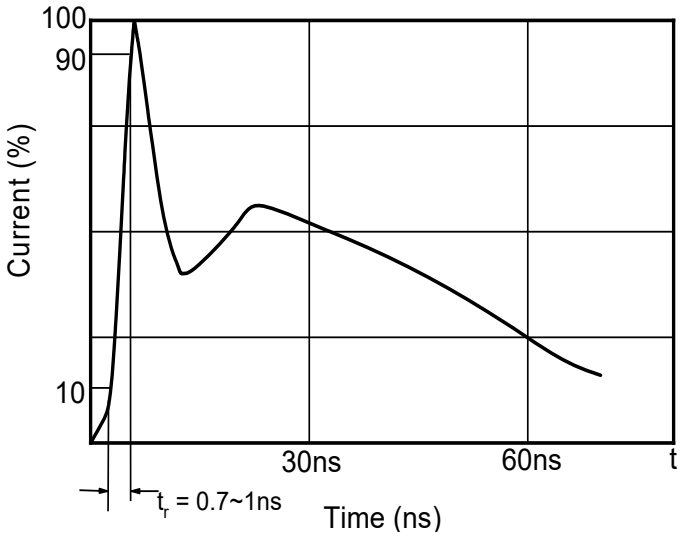


Fig.3 Clamping voltage vs. Peak pulse current

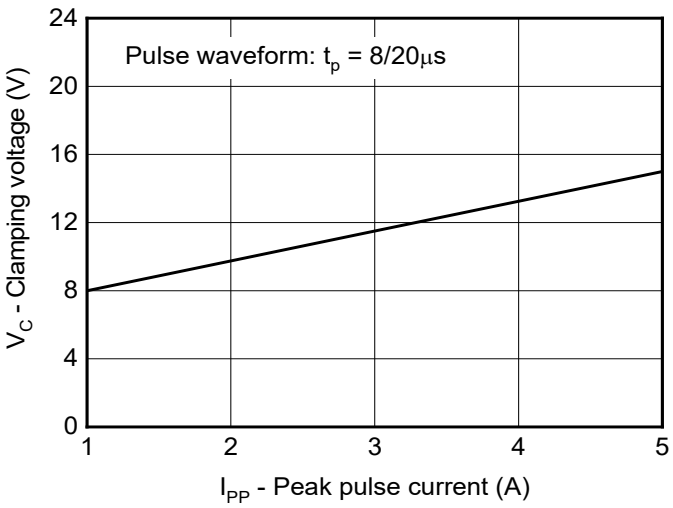


Fig.4 Capacitance vs. Reverse voltage

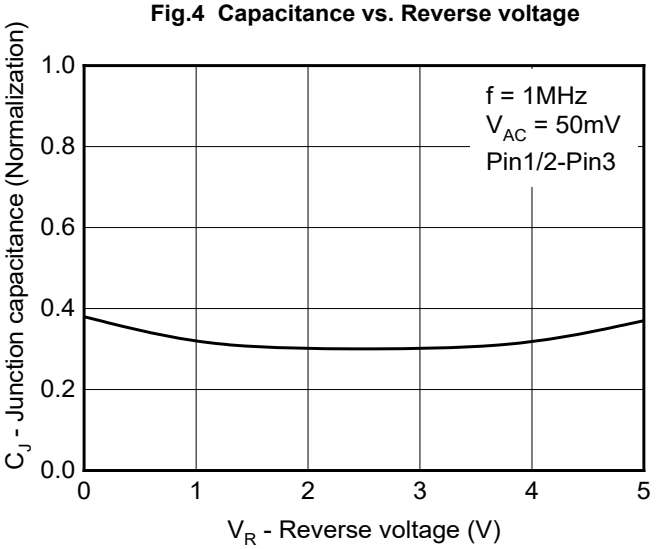


Fig.5 Non-repetitive peak pulse power vs. Pulse time

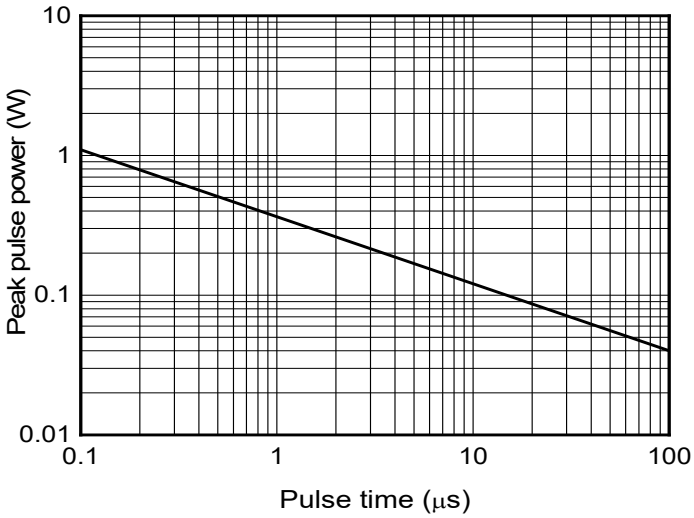


Fig.6 Power derating vs. Ambient temperature

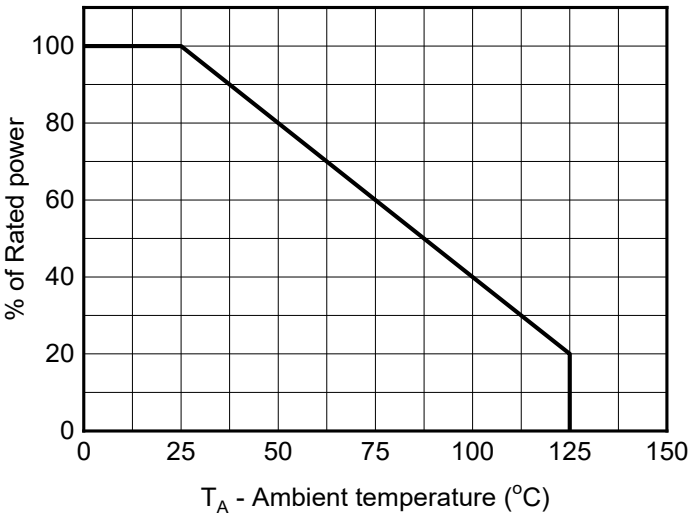


Fig.7 ESD clamping - I/O to GND
(+8kV contact discharge per IEC61000-4-2



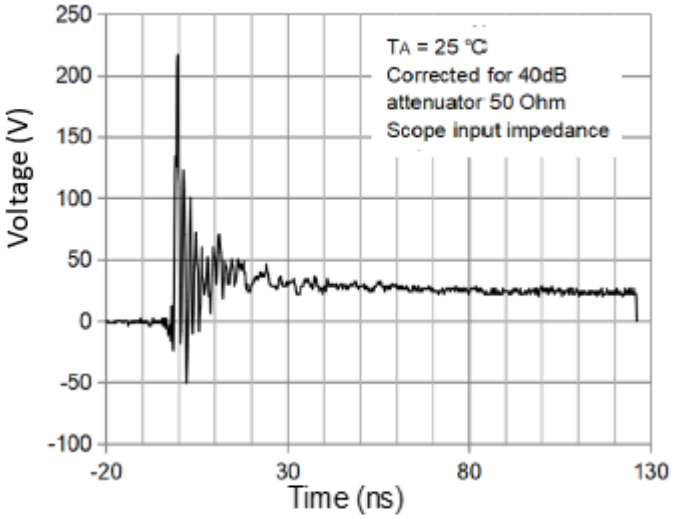



Fig.8 TLP Measurment

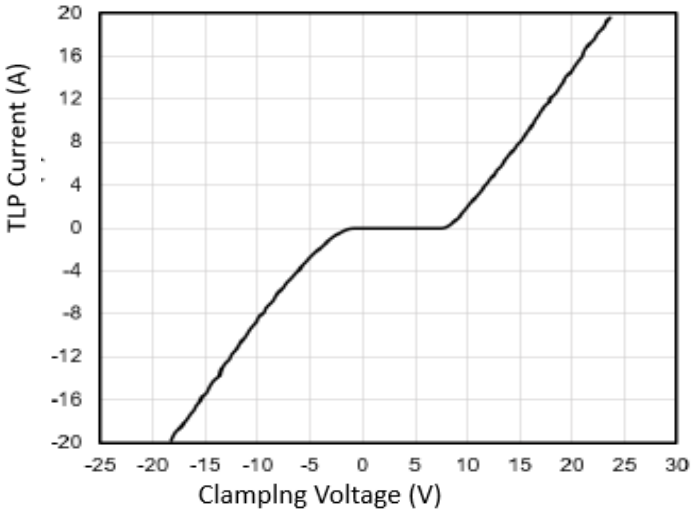

■ Outline Dimensions

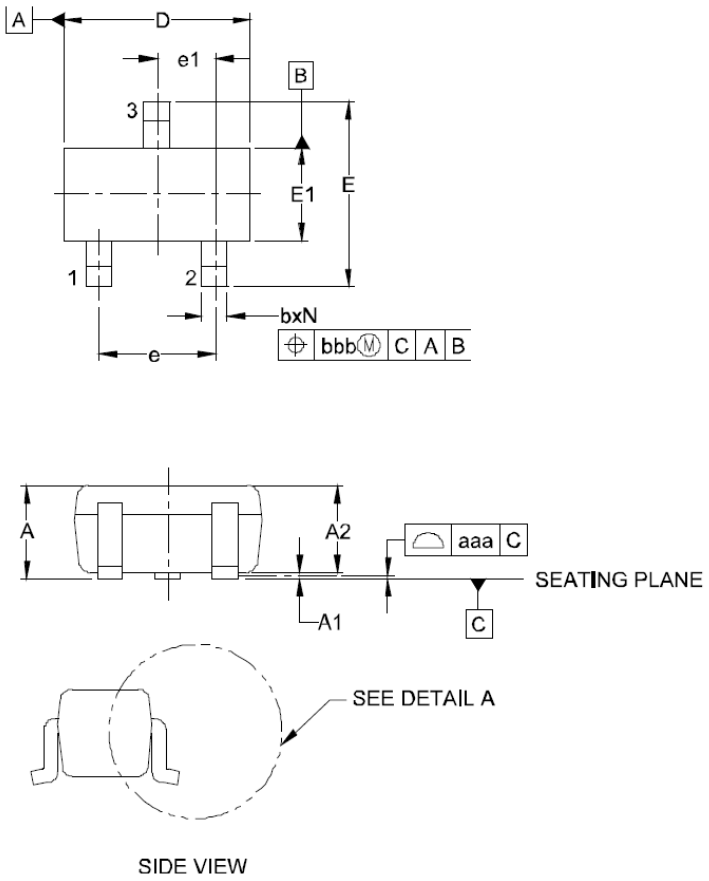


DIMENSIONS						
DIM	INCHES			MILLIMETERS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	.023	-	.035	0.60	-	0.90
A1	.000	-	.004	0.00	-	0.10
A2	.023	.030	.031	0.60	0.75	0.80
b	.005	-	.012	0.15	-	0.30
c	.003	-	.008	0.10	-	0.20
D	.059	.063	.067	1.50	1.60	1.70
E	.057	.063	.069	1.45	1.60	1.75
E1	.029	.031	.033	0.75	0.80	0.85
e	.039 BSC			1.00 BSC		
e1	.020 BSC			0.50 BSC		
L	(.009)			(0.22)		
N	3			3		
θ	0°	-	8°	0°	-	8°
aaa	.004			0.10		
bbb	.008			0.20		

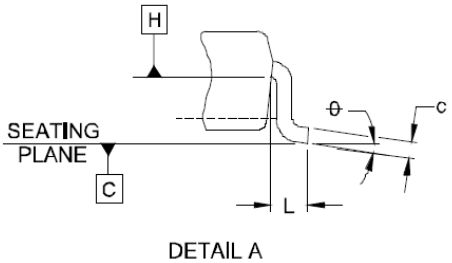

DETAIL A

■ Soldering Footprint

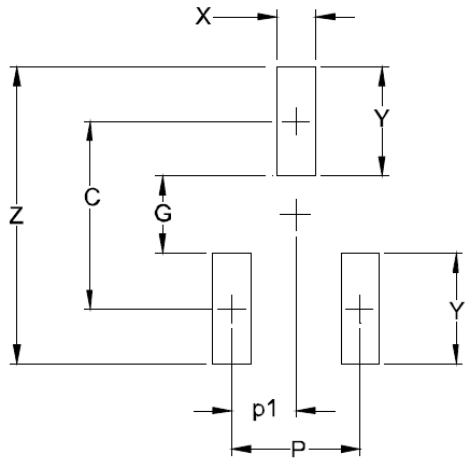

SYM	DIMENSIONS	
	INCHES	MILLIME-TERS
C	(.055)	(1.40)
P	.039	1.00
P1	.020	0.50
G	.024	0.60
X	.016	0.40
Y	.031	0.80
Z	.087	2.20

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.