
4-Line, Uni-directional, Ultra-low Capacitance, Transient Voltage Suppressor

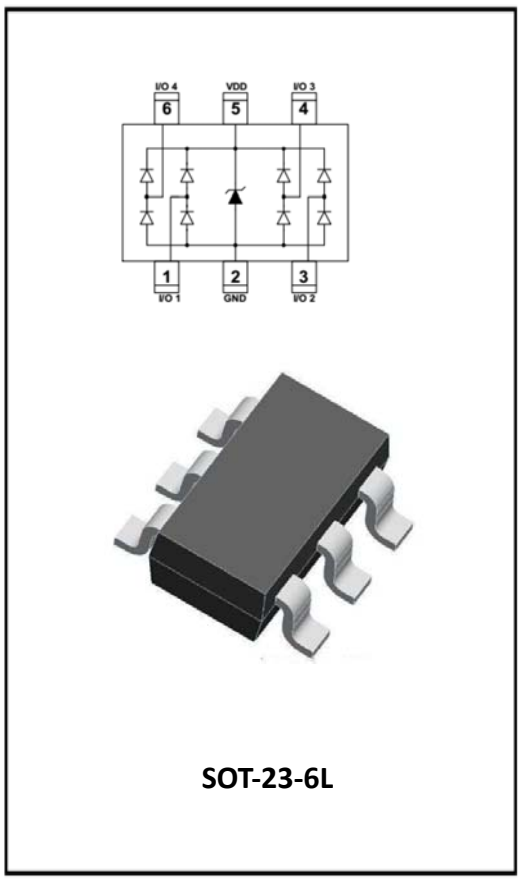

Features


- Operating voltage: 5V
- Transient protection for each line according to
  IEC61000-4-2(ESD): ±20kV (contact)
  IEC61000-4-5(surge): 4.5A (8/20μs)
- Ultra low capacitance: Cj=0.45pF typ
- Ultra low leakage
- Low clamping voltage
- Up to 4 lines protects
- RoHS Compliant

Applications


- USB 2.0
- Video Graphics Cards
- DVI
- IEEE 1394
- Monitors and Flat Panel Displays
- 10/100 Ethernet
- NotebookS

Mechanical Data

- Package: SOT-23-6L
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below



■Definitions of electrical characteristics

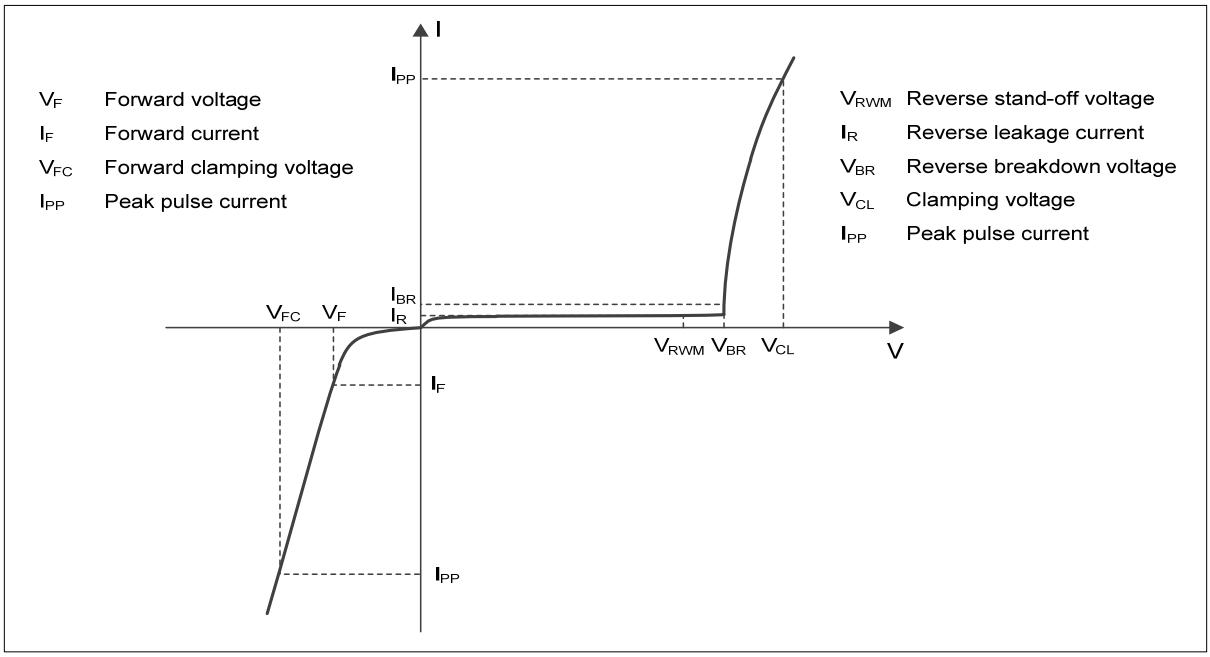

■Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	54	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	4.5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±25	KV
ESD according to IEC61000-4-2 contact discharge		±25	
Junction temperature	T_J	125	℃
Storage temperature	T_{STG}	-55~150	℃

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V	Any I/O pin to ground			5.0
Reverse leakage current	I_R	nA	V_{RWM} = 5.0V, any I/O pin to ground			100
Reverse breakdown voltage	$V_{(BR)}$	V	I_T = 1mA, any I/O pin to ground	7.0		9.0
Forward Voltage	V_F	V	I_F=10mA ground to any I/O pin	0.6		1.2
Clamping voltage 1)	V_{CL}	V	I_{PP} = 16A, t_p = 100ns any I/O pin to ground		13.2	
Dynamic resistance 1)	R_{DYN}	Ω			0.3	
Clamping voltage 2)	V_{CL}	V	V_{ESD} = 8kV any I/O pin to ground		14	
Clamping voltage	V_{CL}	V	I_{PP} = 1A, t_p = 8/20μs		7.8	9
		V	I_{PP} = 4.5A, t_p = 8/20μs		10	12
Junction capacitance	CJ	pF	V_R = 0V, f = 1MHz Any I/O pin to GND		0.5	0.7
			V_R = 0V, f = 1MHz Between I/O pins		0.2	0.4

Notes:

(1). TLP parameter: Z0 = 50Ω, tp = 100ns, tr = 2ns, averaging window from 60ns to 80ns. RDYN is calculated from 4A to 16A.

(2). Contact discharge mode, according to IEC61000-4-2.

(3). Non-repetitive current pulse, according to IEC61000-4-5

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDSLC0504S2S	F2	Approximate 16	3000	30000	120000	7 reel

■ Characteristics (Typical)

Fig.1 8/20μs waveform per IEC61000-4-5

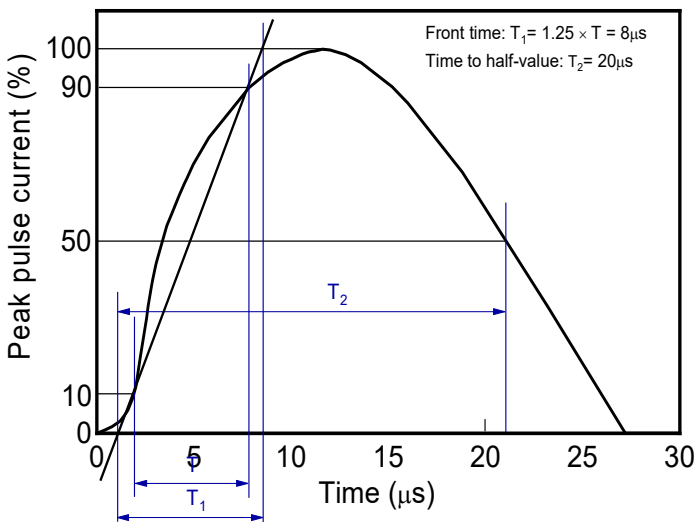


Fig.2 Contact discharge current waveform per IEC61000-4-2

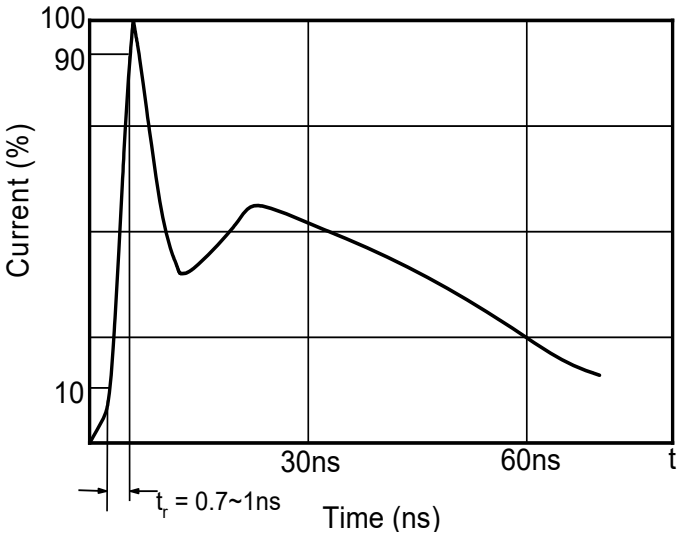


Fig.3 Clamping voltage vs. Peak pulse current

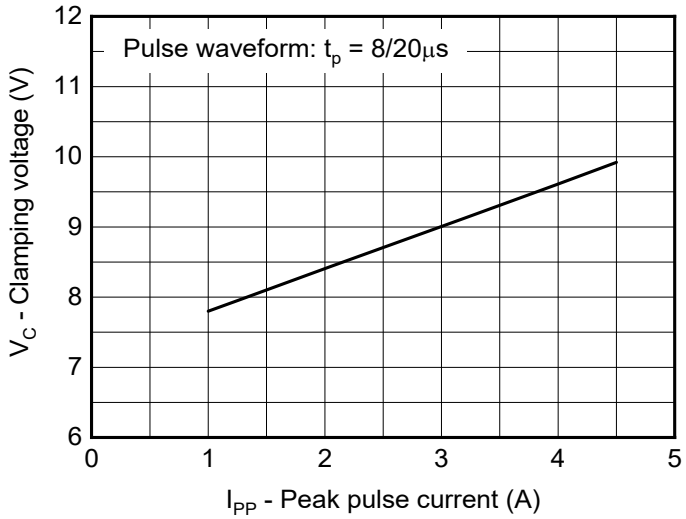


Fig.4 Capacitance vs. Reverse voltage

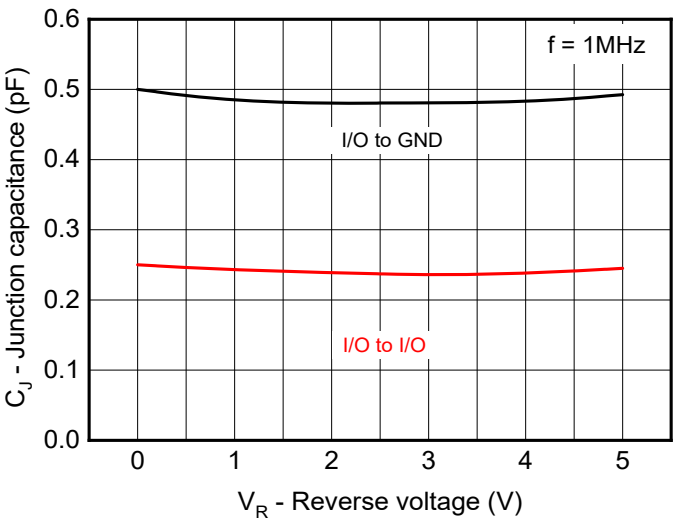


Fig.5 Non-repetitive peak pulse power vs. Pulse time

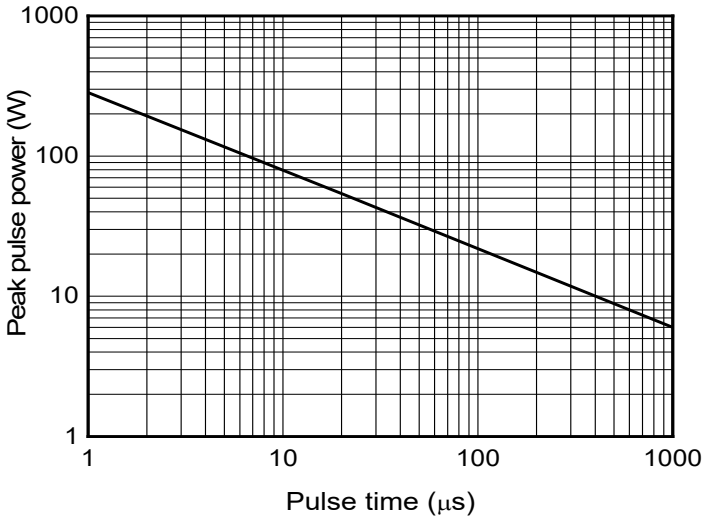


Fig.6 Power derating vs. Ambient temperature

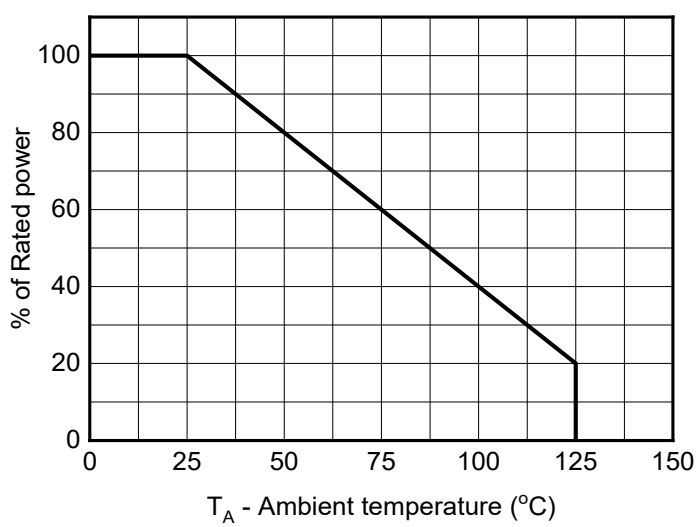


Fig.7 ESD clamping
(+8kV contact discharge per IEC61000-4-2)

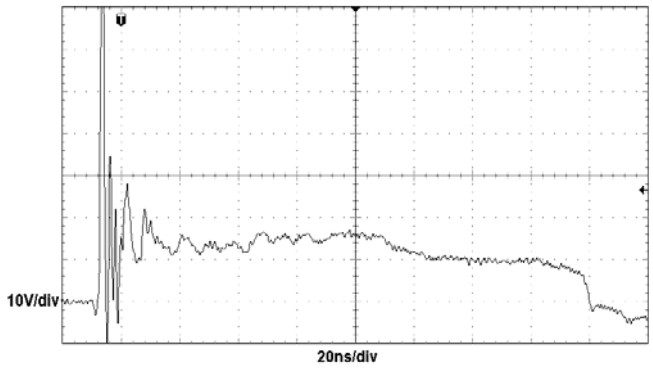


Fig.8 ESD clamping
(-8kV contact discharge per IEC61000-4-2)



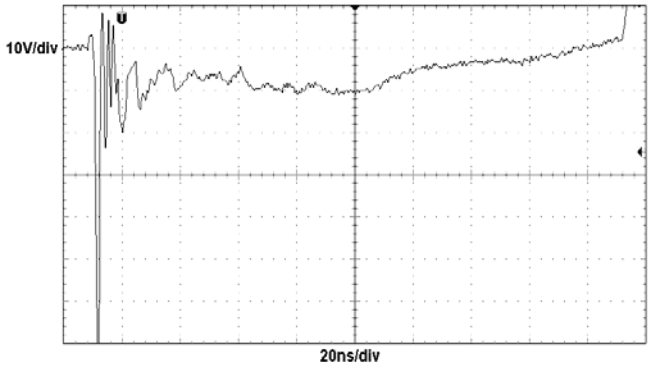


Fig.9 TLP Measurement

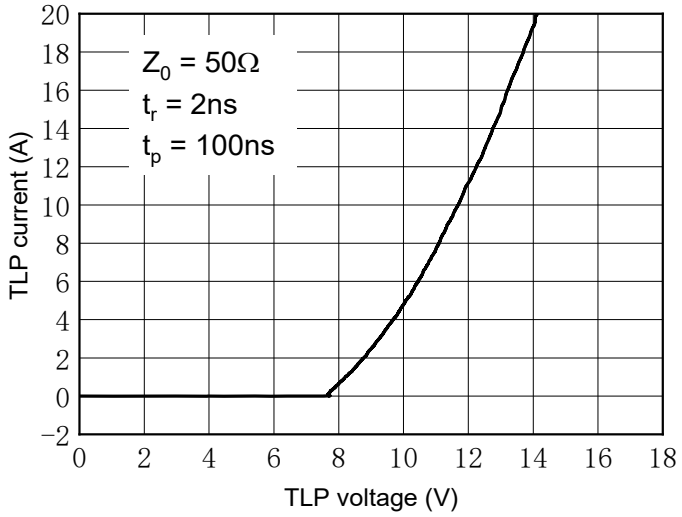

■ Outline Dimensions

SOT-23-6L

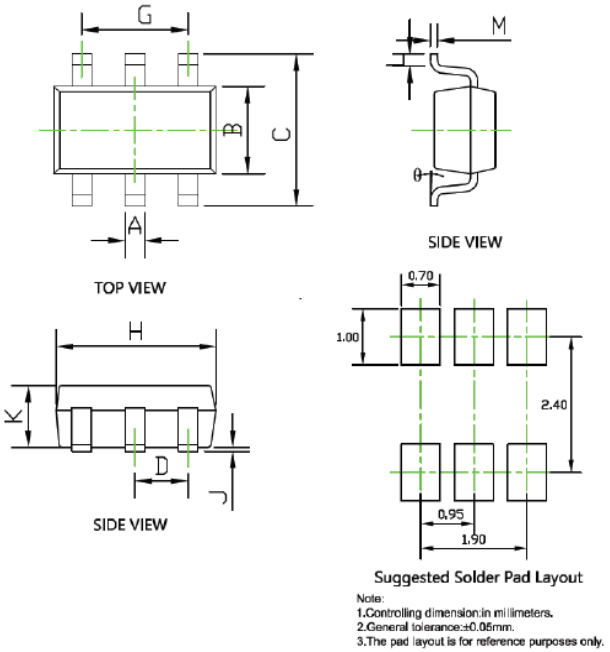

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.012	0.020	0.300	0.500
B	0.059	0.067	1.500	1.700
C	0.104	0.116	2.650	2.950
D	0.037BSC		0.950BSC	
G	0.075BSC		1.900BSC	
H	0.111	0.119	2.820	3.020
J	0.000	0.004	0.000	0.100
K	0.041	0.045	1.050	1.150
L	0.012	0.024	0.300	0.600
M	0.004	0.008	0.100	0.200
θ	0°	8°	0°	8°

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.