
4-Line, Uni-directional, low Capacitance TVS Diode Array

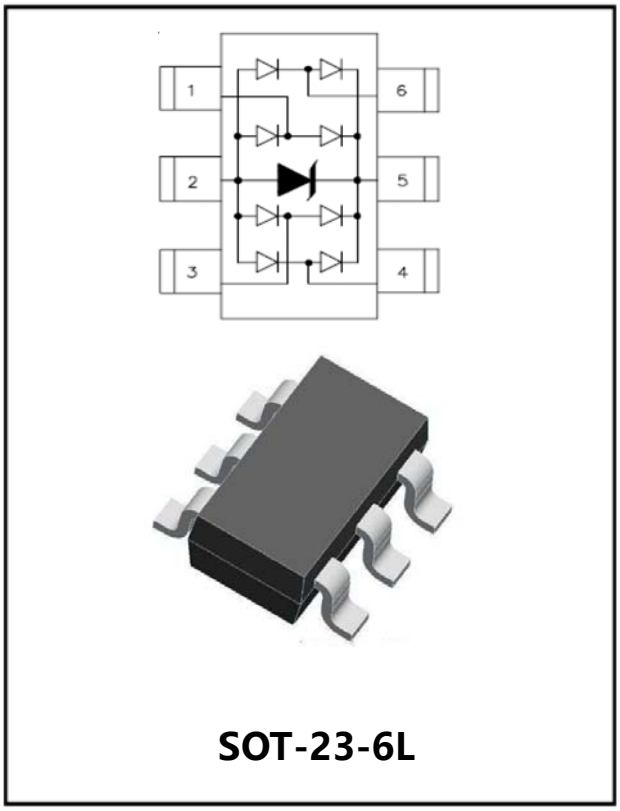

Features


- Stand-off voltage: 5V Max
- Transient protection for each line according to
  IEC61000-4-2(ESD): ±30kV (contact)
  IEC61000-4-5(surge): 30A (8/20μs)
- Ultra-low capacitance: C_J = 1 pF typ
- Low leakage current
- Low clamping voltage
- RoHS Compliant

Applications


- USB 2.0 power and data line
- Monitors and flat panel displays
- Set-top box and digital TV
- Digital visual interface (DVI)
- Notebook Computers
- SIM Ports
- 10/100 Ethernet
- IEEE 1394 firewire ports

Mechanical Characteristics

- Package: SOT-23-6L
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below

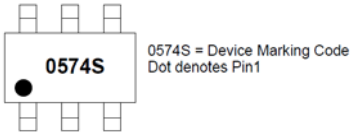

■Definitions of electrical characteristics

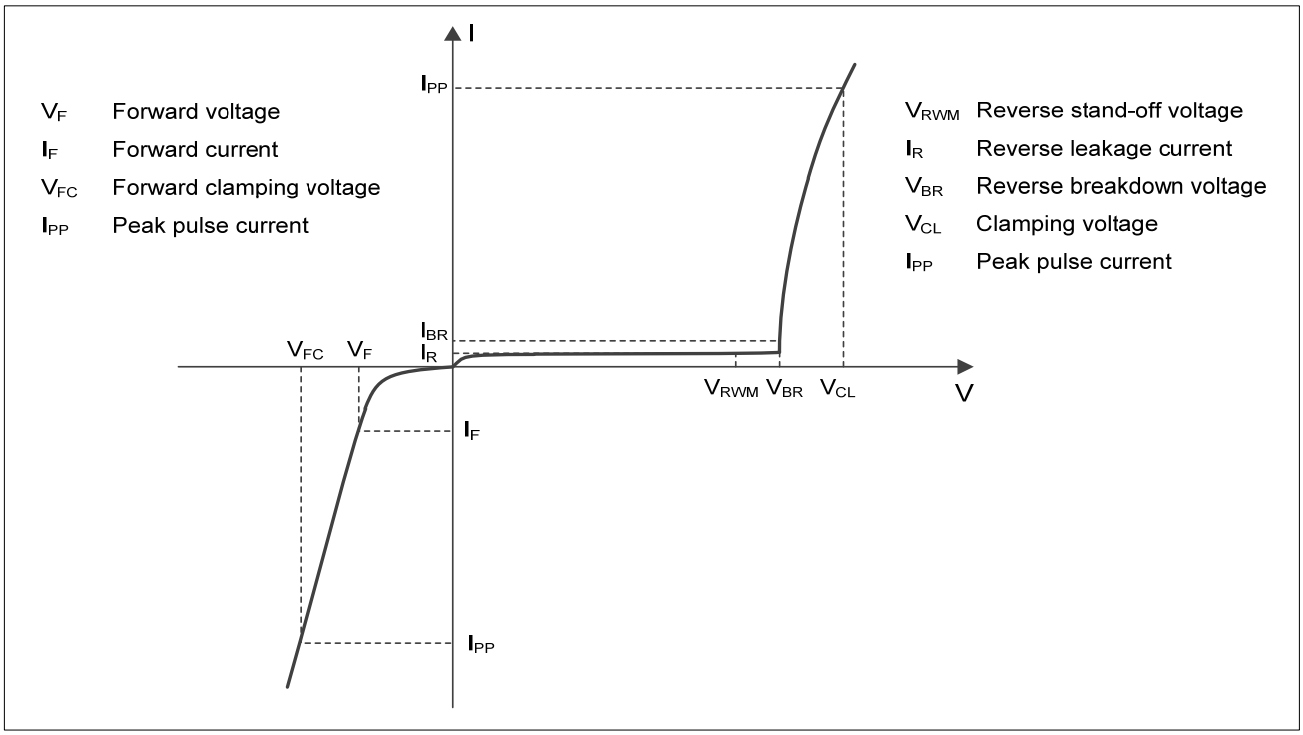

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	Rating	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	600	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	30	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±30	KV
ESD according to IEC61000-4-2 contact discharge		±30	KV
Junction temperature	T_J	125	°C
Storage temperature	T_{STG}	-55~150	°C

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

I/O Pins

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V	Any I/O Pin to ground			5.0
Reverse leakage current	I_R	nA	V_{RWM} =5V, any I/O Pin to ground			500
Reverse breakdown voltage	V_{BR}	V	I_{BR} = 1mA, any I/O pin to ground	6.0		
Forward voltage	V_F	V	I_F = 15mA, ground to Pin 1,3,4,5,6	0.6	0.9	1.2
Clamping voltage [3]	V_{CL}	V	I_{PP} = 1A, t_p = 8/20μs, any I/O pin to ground			12
		V	I_{PP} = 30A, t_p = 8/20μs, any I/O pin to ground			20
Junction capacitance	C_J	pF	V_R = 0V, f = 1MHz, Any I/O pin to ground		1	1.8

Notes：

(1). Non-repetitive current pulse, according to IEC61000-4-5
(2). I/O pins are Pin 1, 3, 4 and 6

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDSLC0574S2	Approximate 15.85	3000	30000	120000	Tape & reel

■Typical Performance Characteristics (Ta=25°C unless otherwise Specified)

Fig.1 8/20μs waveform per IEC61000-4-5

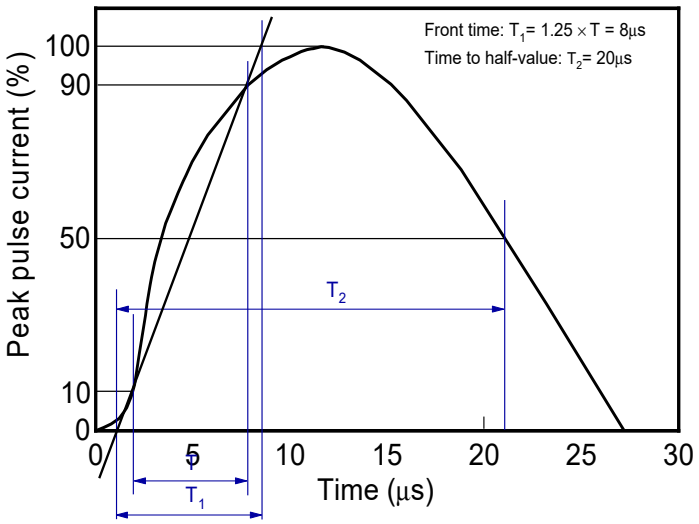


Fig.2 Contact discharge current waveform per IEC61000-4-2

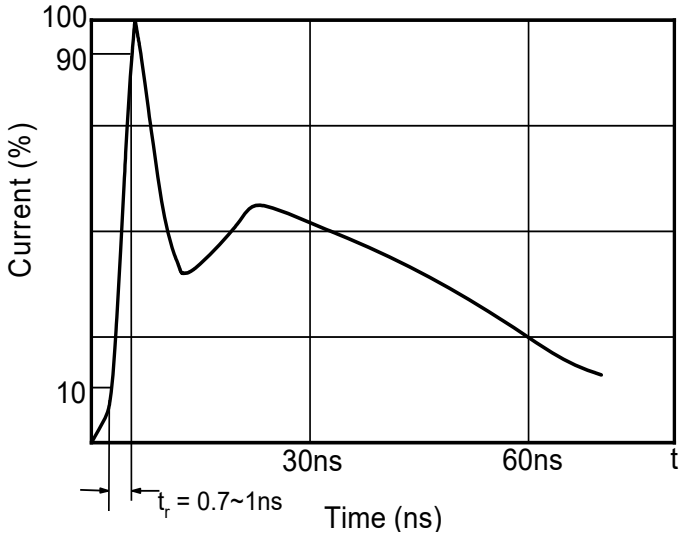


Fig.3 Clamping voltage vs. Peak pulse current

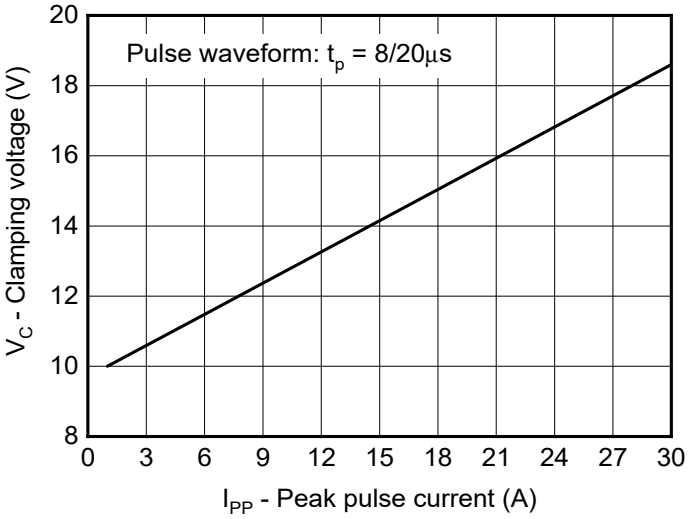


Fig.4 Capacitance vs. Reverse voltage

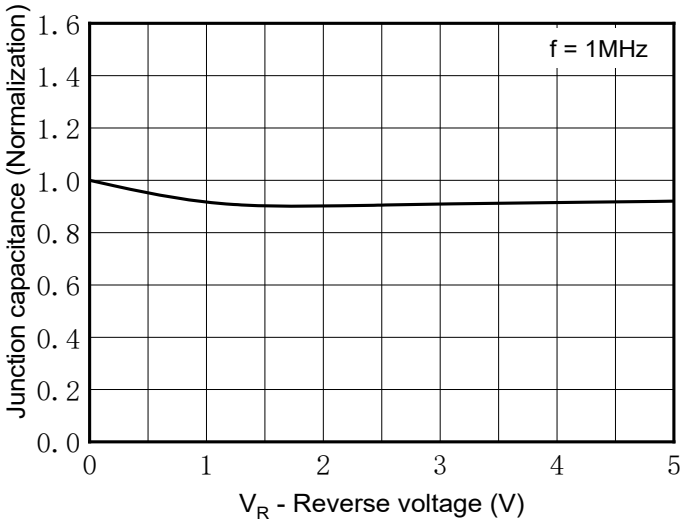


Fig.5 Non-repetitive peak pulse power vs. Pulse time

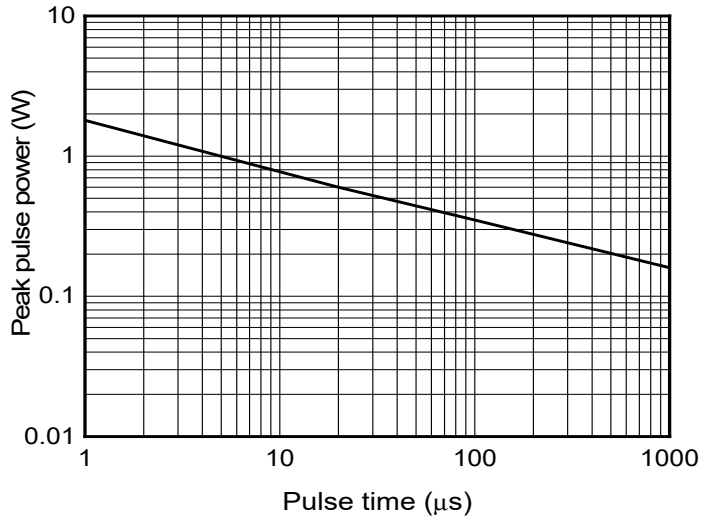


Fig.6 Power derating vs. Ambient temperature



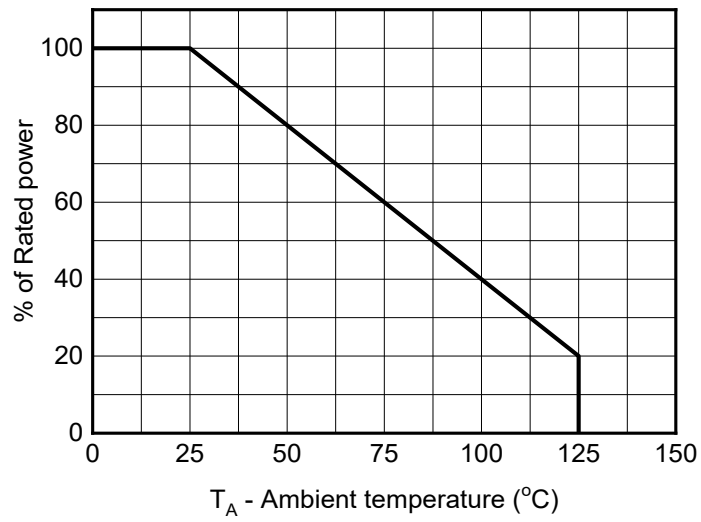


Fig.7 ESD clamping - I/O to GND
(+8kV contact discharge per IEC61000-4-2)

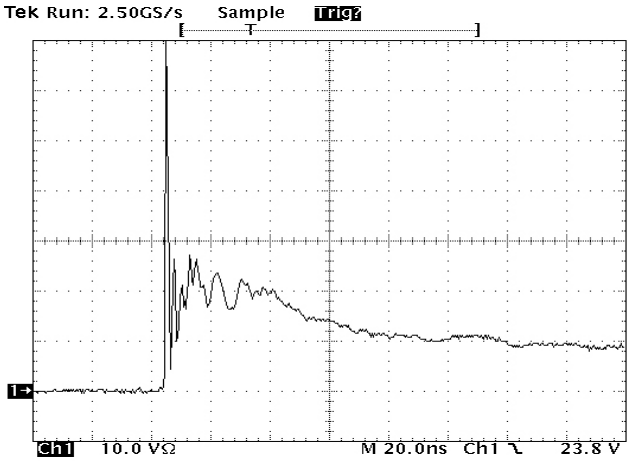

■SOT-23 6L Package Outline Drawing

SOT-23-6L

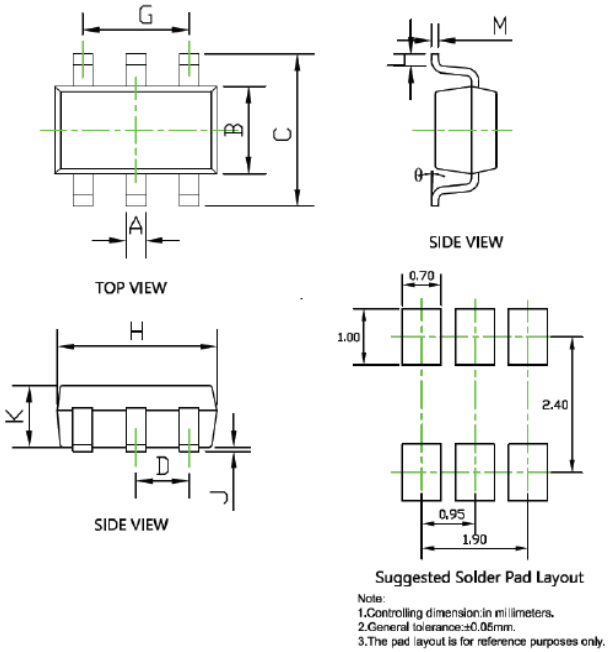

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.05mm.
3.The pad layout is for reference purposes only.

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.012	0.020	0.300	0.500
B	0.059	0.067	1.500	1.700
C	0.104	0.116	2.650	2.950
D	0.037BSC		0.950BSC	
G	0.075BSC		1.900BSC	
H	0.111	0.119	2.820	3.020
J	0.000	0.004	0.000	0.100
K	0.041	0.045	1.050	1.150
L	0.012	0.024	0.300	0.600
M	0.004	0.008	0.100	0.200
θ	0°	8°	0°	8°

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.