
1-Line Low Capacitance Bi-directional TVS Diode



Features

- ●340W peak pulse power (8/20μs)
- ●Ultra low capacitance: 1pF typical
- ●Ultra low leakage: nA level
- ●Operating voltage:3.3V
- ●Low clamping voltage
- ●Protects one power line or data line
- ●Complies with following standards:
  - – IEC 61000-4-2 (ESD) immunity test
    Air discharge: ±30Kv
    Contact discharge: ±30kV
  - – IEC61000-4-5 (Lightning) 30A (8/20μs)
- ●RoHS Compliant

Marking Information

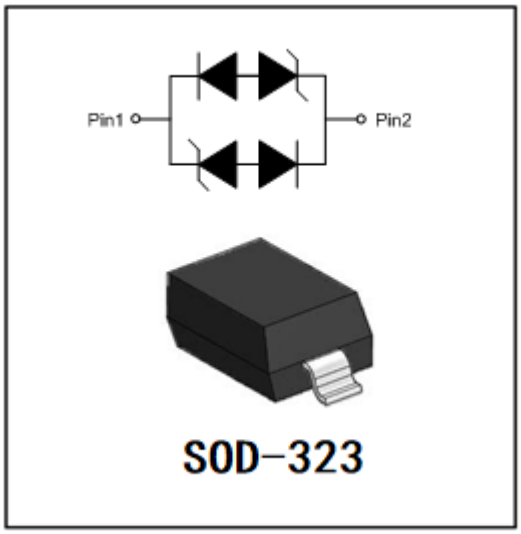


■Maximum Ratings

PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power (8/20μs)	Ppk	340	W
Peak Pulse Current (8/20μs)	I_{PP}	21	A
ESD per IEC 61000−4−2 (Air) ESD per IEC 61000−4−2 (Contact)	V_{ESD}	±30 ±30	KV
Operating Temperature Range	T_J	−55 to +125	℃
Storage Temperature Range	Tstg	−55 to +150	℃


■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	TYP	MAX
Reverse Working Voltage	V_{RWM}	V				3.3
Reverse breakdown voltage	V_{BR}	V	I_{BR} = 1mA	3.5		
Reverse Leakage Current	I_R	μA	V_{RWM} = 3.3V			0.2
Clamping Voltage	V_C	V	I_{PP} = 1A (8/20μs pulse)			7
Clamping Voltage	V_C	V	I_{PP} = 21A (8/20μs pulse)			16
Junction Capacitance	C_J	pF	V_R = 0V, f = 1MHz		1	1.5


■ Characteristics (Typical)

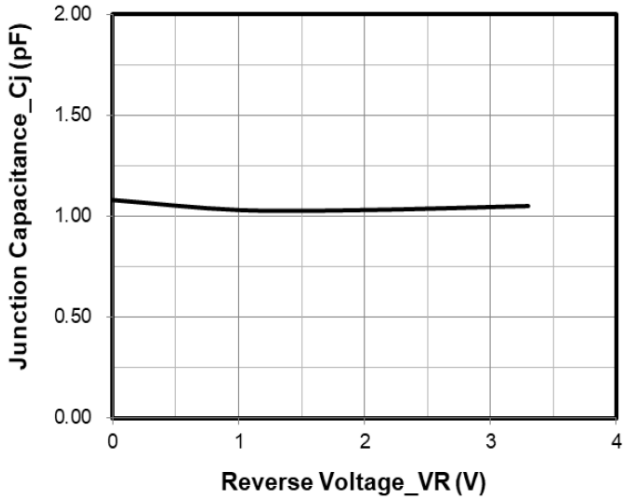


Junction Capacitance vs. Reverse Voltage

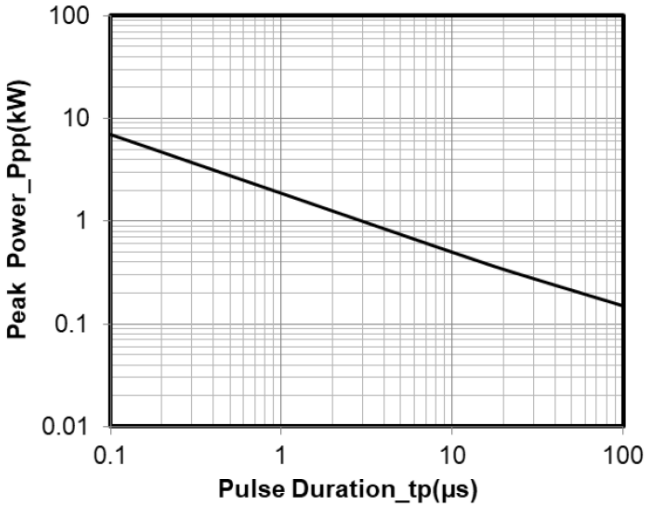


Peak Pulse Power vs. Pulse Time

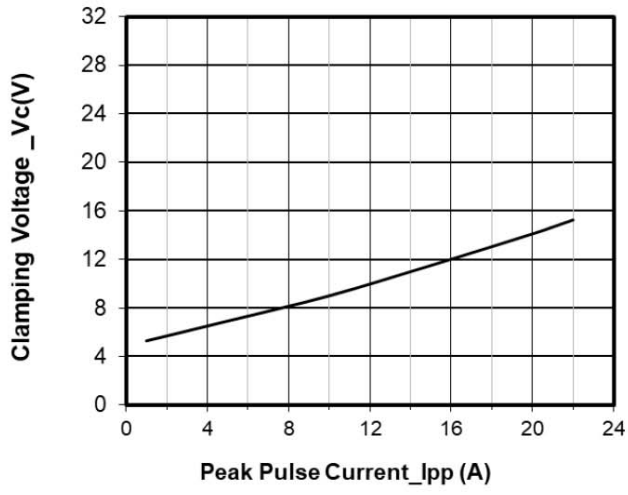


Clamping Voltage vs. Peak Pulse Current

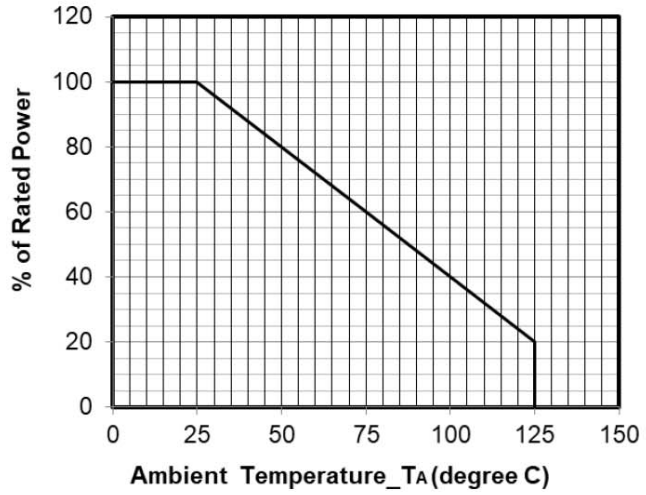


Power Derating Curve

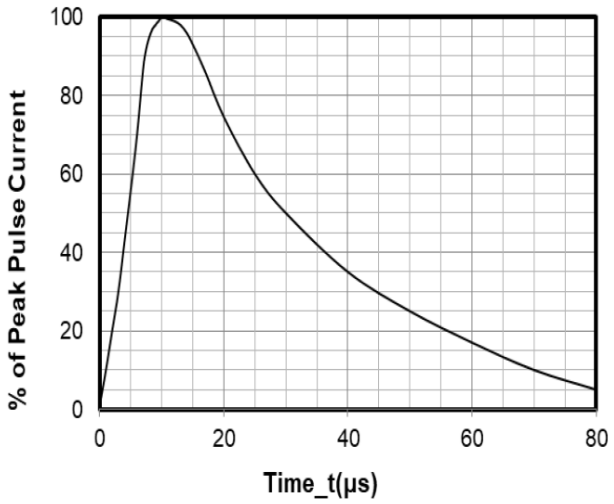


8 X 20μs Pulse Waveform

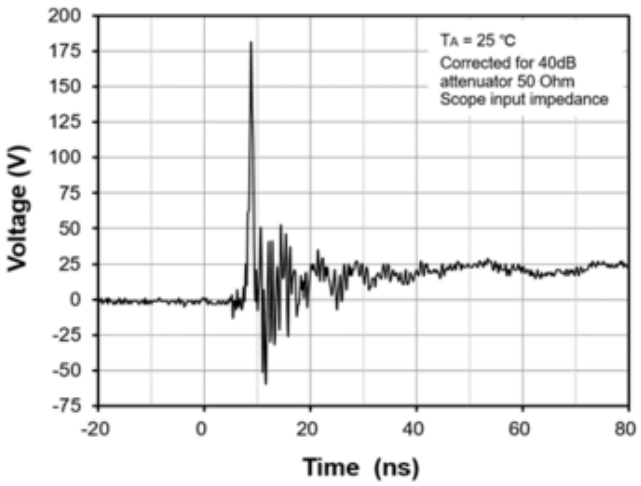

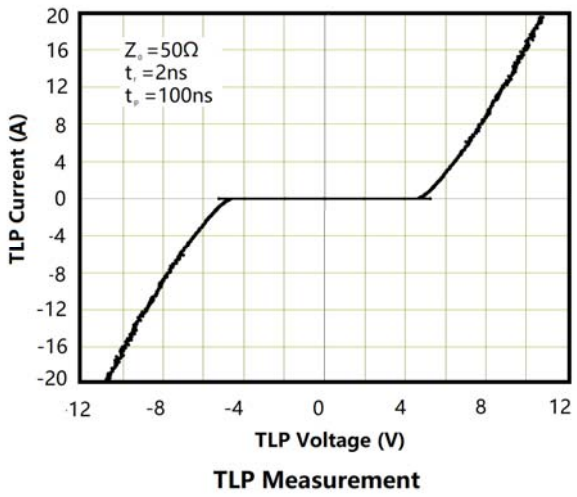


TLP Measurement

■ Outline Dimensions

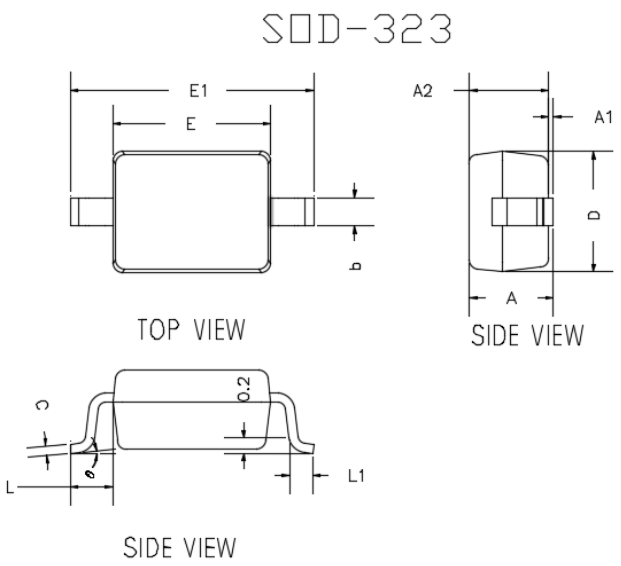

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MN	MAX
A	---	0.0393	---	1.0000
A1	0.0000	0.0039	0.0000	0.1000
A2	0.0314	0.0354	0.8000	0.9000
b	0.0098	0.0157	0.2500	0.4000
c	0.0031	0.0059	0.0800	0.1500
D	0.0472	0.0551	1.2000	1.4000
E	0.0629	0.0709	1.6000	1.8000
E1	0.0984	0.1063	2.5000	2.7000
L	0.0187TYP		0.475TYP	
L1	0.0098	0.0157	0.250	0.400
θ	0°	8°	0°	8°

■ Soldering Footprint

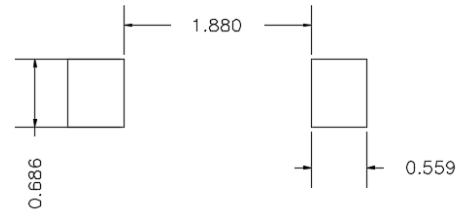

UNIT: mm

SUGGESTED SOLDER PAD LAYOUT

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.