
1-Line Ultra Low Capacitance Bi-directional TVS Diode

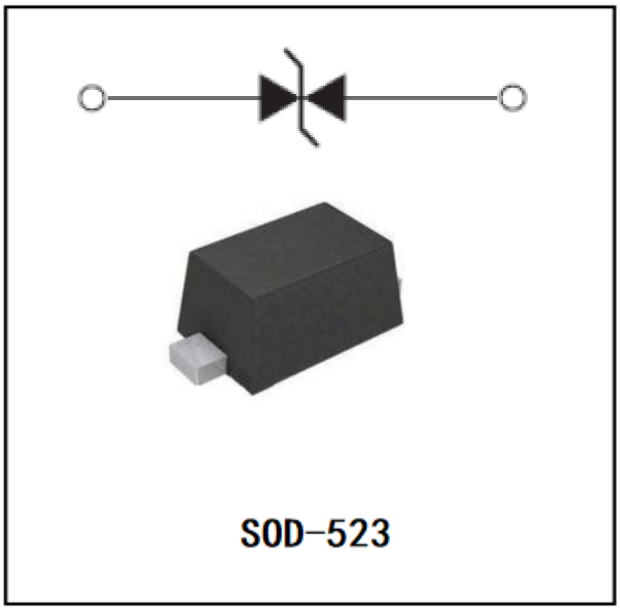


Features

- ●Ultra low capacitance: 0.3pF typical
- ●Ultra low leakage: nA level
- ●Operating voltage:5.0V
- ●Low clamping voltage
- ●Complies with following standards:
  - – IEC 61000-4-2 (ESD) immunity test
  - Air discharge: ±25Kv
  - Contact discharge: ±22kV
  - – IEC61000-4-5 (Lightning) 30A (8/20μs)
- ●RoHS Compliant

Mechanical Characteristics

- ●Package: SOD-523
- ●Case Material: “Green” Molding Compound
- ●Moisture Sensitivity: Level 1 per J-STD-020
- ●Marking Information: See Below



25= Device Marking Code


■Maximum Ratings

PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power (8/20μs)	Ppk	100	W
Peak Pulse Current (8/20μs)	I_{PP}	4	A
ESD per IEC 61000−4−2 (Air) ESD per IEC 61000−4−2 (Contact)	V_{ESD}	±25 ±22	KV
Operating Temperature Range	T_J	−55 to +125	℃
Storage Temperature Range	Tstg	−55 to +150	℃


■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	TYP	MAX
Reverse Working Voltage	V_{RWM}	V				5
Breakdown Voltage	V_{BR}	V	I_T =1mA	6.5		9.5
Reverse Leakage Current	I_R	μA	V_{RWM} = 5V		0.02	0.2
Clamping Voltage	V_C	V	I_{PP} = 1A (8/20μs pulse)			12
Clamping Voltage	V_C	V	I_{PP} = 4A (8/20μs pulse)			25
Junction Capacitance	C_J	pF	V_R = 0V, f = 1MHz		0.3	0.5


■ Characteristics (Typical)

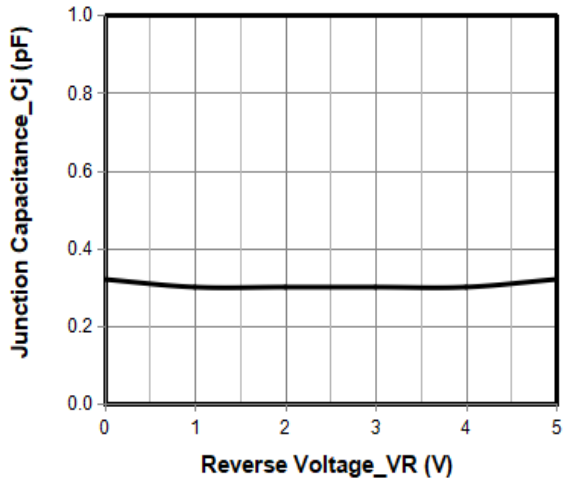


Junction Capacitance vs. Reverse Voltage

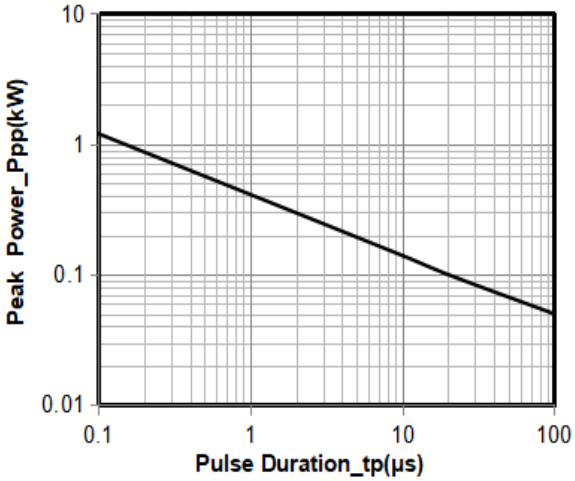


Peak Pulse Power vs. Pulse Time

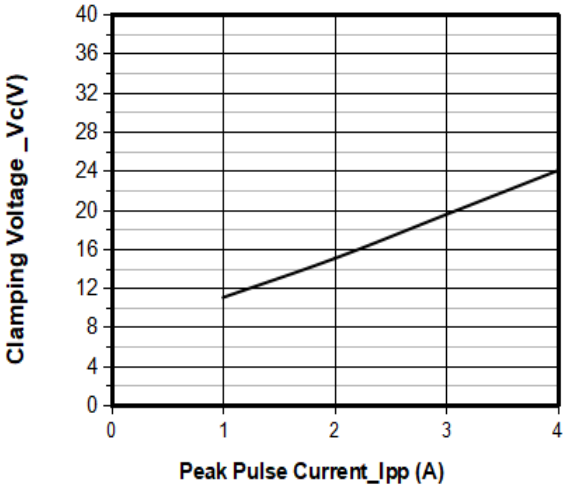


Clamping Voltage vs. Peak Pulse Current

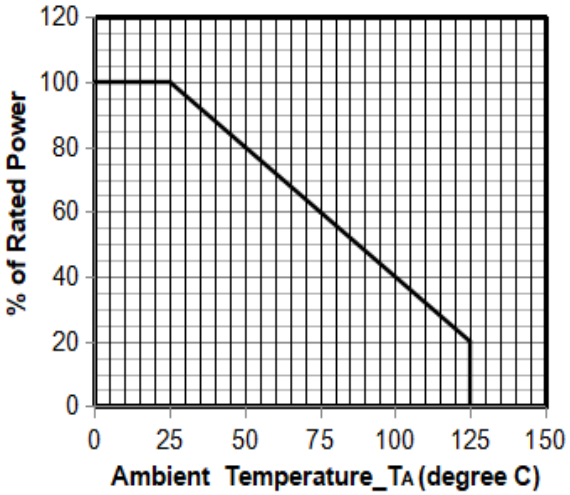

Power Derating Curve

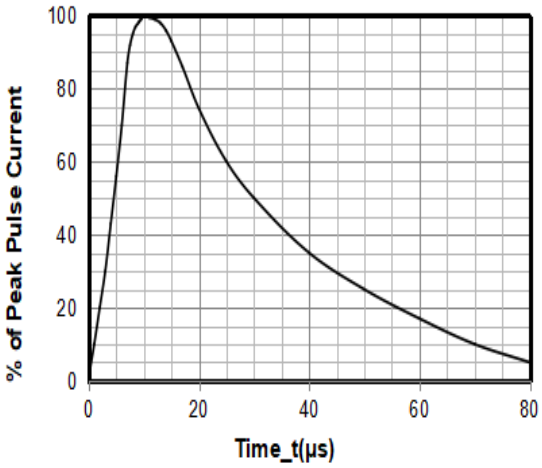


8/20μs Pulse Waveform

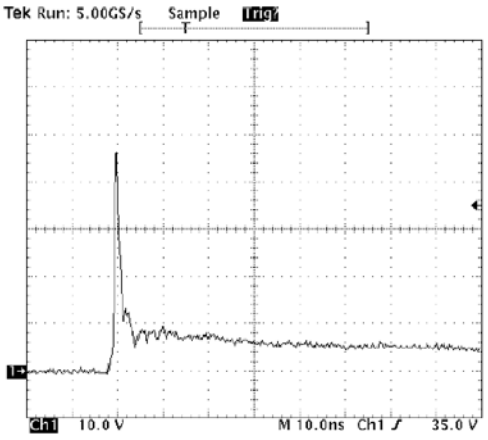


Note: Data is taken with a 10x attenuator
ESD Clamping Voltage
+8 kV Contact per IEC61000−4−2

■ Outline Dimensions

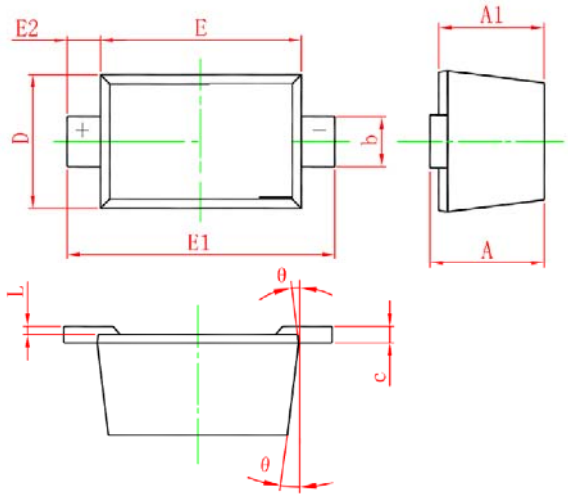

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.51	- -	0.77	0.020	- -	0.031
A1	0.50	- -	0.70	0.020	- -	0.028
b	0.25	- -	0.35	0.010	- -	0.014
c	0.08	- -	0.15	0.003	- -	0.006
D	0.75	- -	0.85	0.030	- -	0.033
E	1.10	- -	1.30	0.043	- -	0.051
E1	1.50	- -	1.70	0.059		0.067
E2	0.20REF			0.008REF		
L	0.01	- -	0.07	0.001	- -	0.003
Θ	7° REF			7° REF		

■ Soldering Footprint

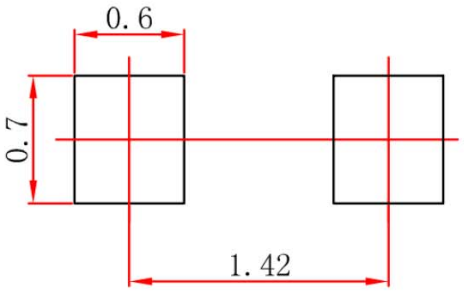

Unit： mm

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.