
1-Lines, Uni-directional, Ultra-low Capacitance, Transient Voltage Suppressor

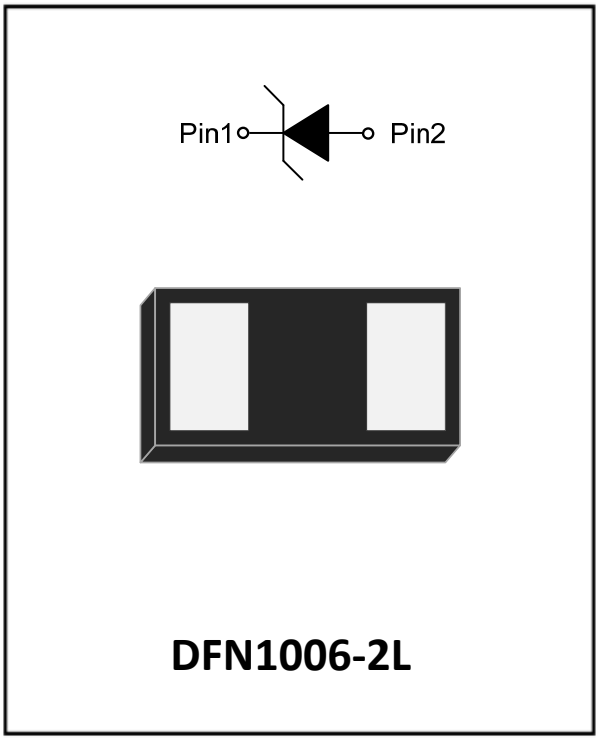

Features


- Ultra small package
- Stand-off voltage: 5V Max
- Transient protection for each line according to
  IEC61000-4-2(ESD): ±20kV (contact)
  IEC61000-4-5(surge): 3.5A (8/20μs)
- Ultra-low capacitance: C_J = 0.4pF typ
- Low leakage current
- Low clamping voltage
- RoHS Compliant

Applications


- USB 2.0 and USB 3.0
- HDMI 1.3, HDMI 1.4 and HDMI 2.0
- SATA and eSATA interface
- DVI
- IEEE 1394
- Portable Electronics and Notebooks
- Ethernet port: 10/100/1000 Mbs/s
- Desktop and Notebooks PCS

Mechanical Characteristics

- Package: DFN1006-2L
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Marking Information: See Below



■Definitions of electrical characteristics

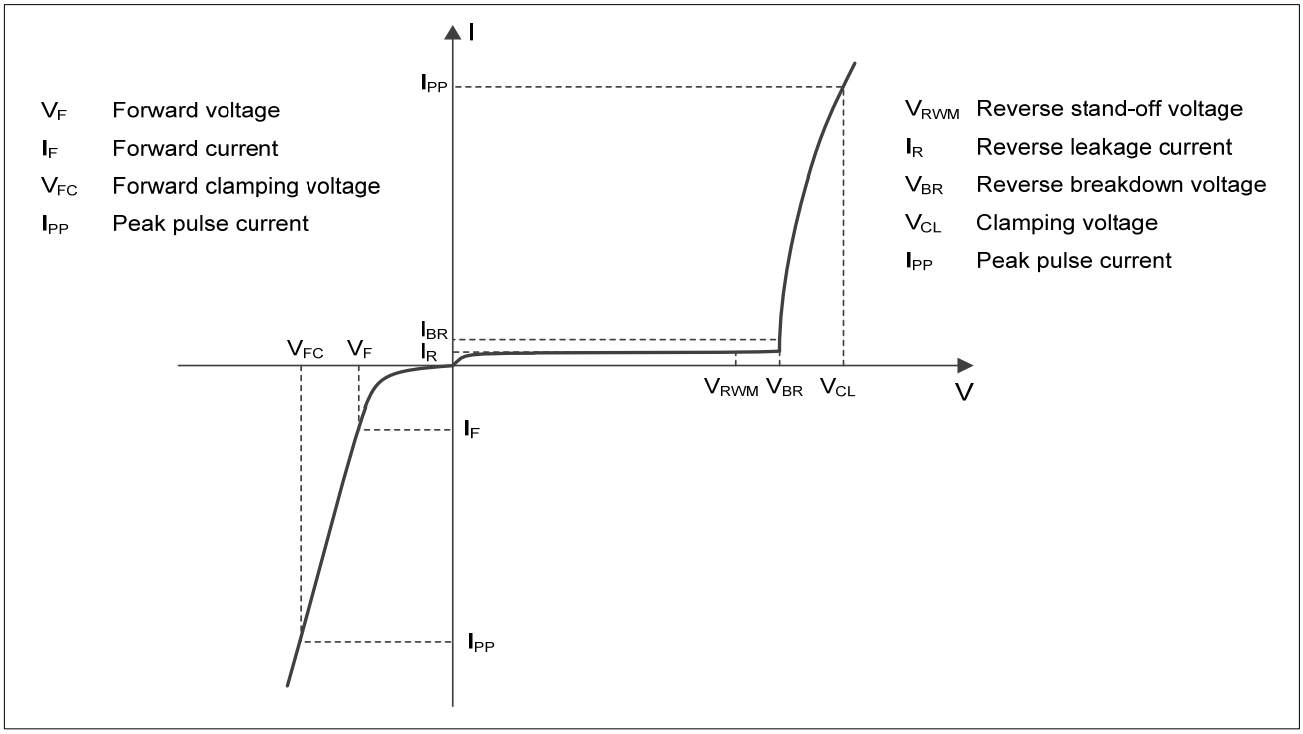

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	Rating	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	42	W
Peak pulse current (t_p = 8/20μs)	I_{PP}	3.5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	±20	KV
ESD according to IEC61000-4-2 contact discharge		±20	KV
Junction temperature	T_J	125	°C
Storage temperature	T_{STG}	-55~150	°C

■Electrical Characteristics (Ta=25℃ Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V				5.0
Reverse leakage current	I_R	nA	V_{RWM} =5V			100
Reverse breakdown voltage	V_{BR}	V	I_{BR} = 1mA	7.0	8.0	9.0
Forward voltage	V_F	V	I_F = 10mA	0.6	0.9	1.2
Clamping voltage 1)	V_{CL}	V	I_{PP} = 16A, t_p = 100ns		14	
Dynamic resistance 1)	R_{DYN}	Ω			0.33	
Clamping voltage 2)	V_{CL}	V	V_{ESD} +8kV		14	
Clamping voltage 3)	V_{CL}	V	I_{PP} = 1A, t_p = 8/20μs			10
		V	I_{PP} = 3.5A, t_p = 8/20μs			12
Junction capacitance	C_J	pF	V_R = 0V, f = 1MHz		0.40	0.65
		pF	V_R = 2.5V, f = 1MHz		0.25	0.40

Notes:
(1). TLP parameter: Z_0 = 50Ω, t_p = 100ns, t_r = 2ns, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.
(2). Contact discharge mode, according to IEC61000-4-2.
(3). Non-repetitive current pulse, according to IEC61000-4-5.

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDSLC5V0L	F1	Approximate 0.9	10000	100000	400000	7” reel

■ Typical Performance Characteristics (Ta=25℃ unless otherwise Specified)

Fig.1 8/20μs waveform per IEC61000-4-5

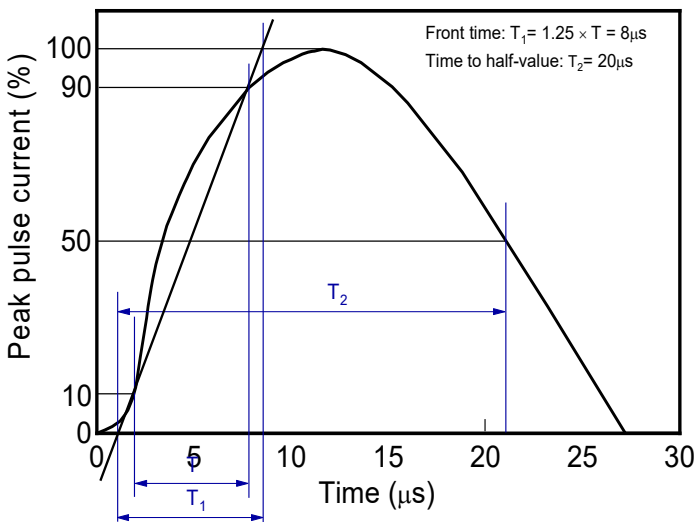


Fig.2 Contact discharge current waveform per IEC61000-4-2

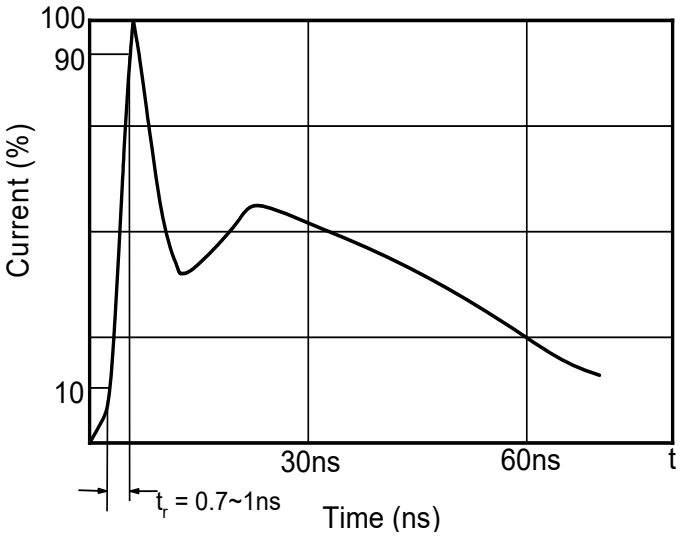


Fig.3 Clamping voltage vs. Peak pulse current

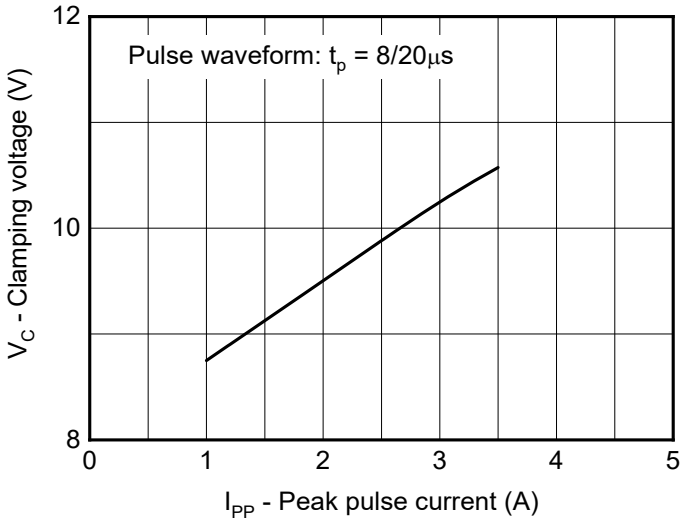


Fig.4 Capacitance vs. Reverse voltage

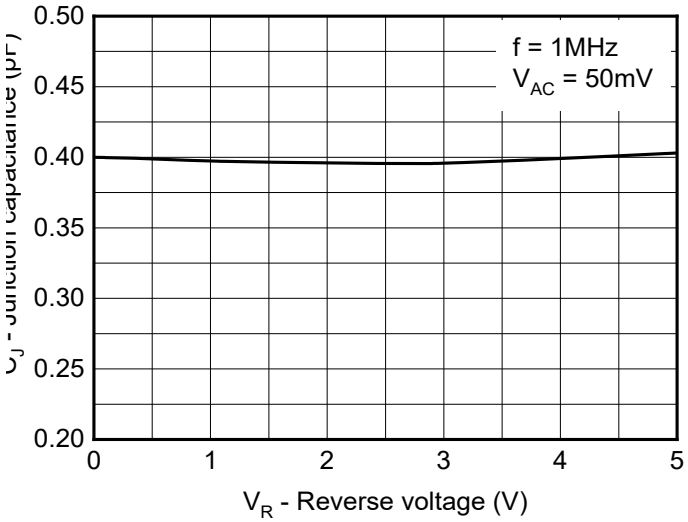


Fig.5 Non-repetitive peak pulse power vs. Pulse time

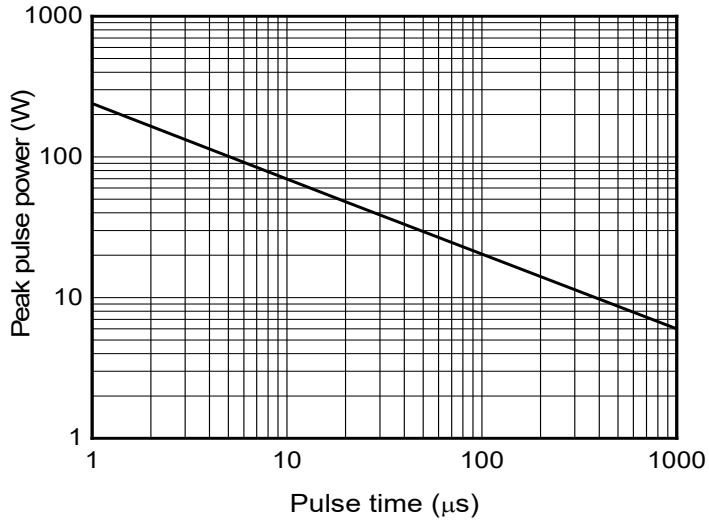


Fig.6 Power derating vs. Ambient temperature

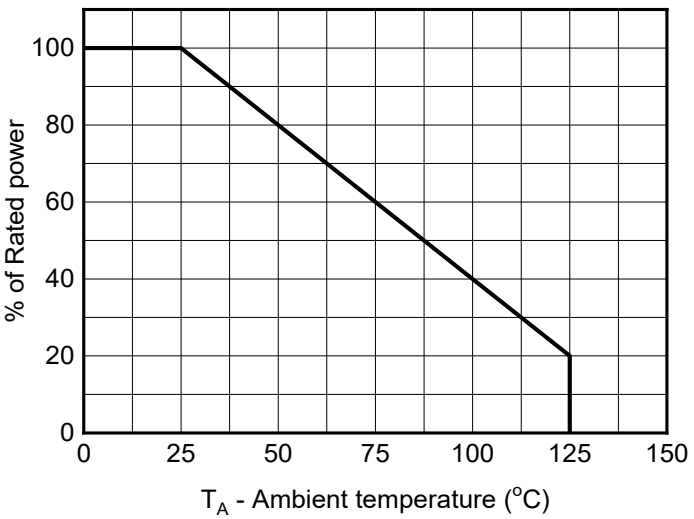


Fig.7 ESD clamping
(+8kV contact discharge per IEC61000-4-2)

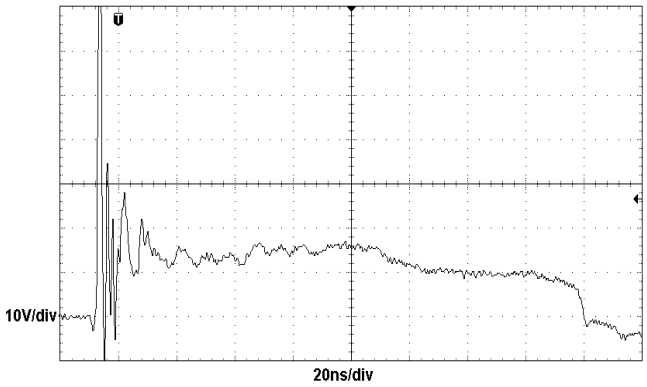


Fig.8 ESD clamping
(-8kV contact discharge per IEC61000-4-2)



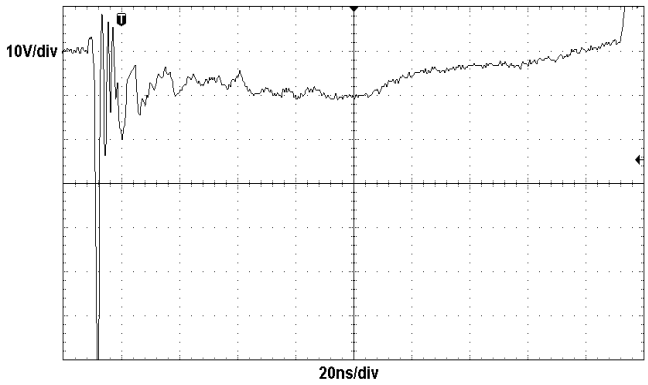


Fig.9 TLP Measurement

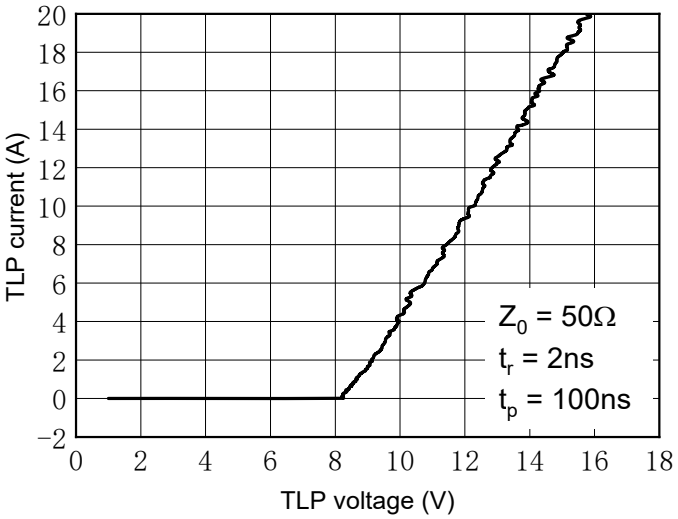

■ Outline Dimensions

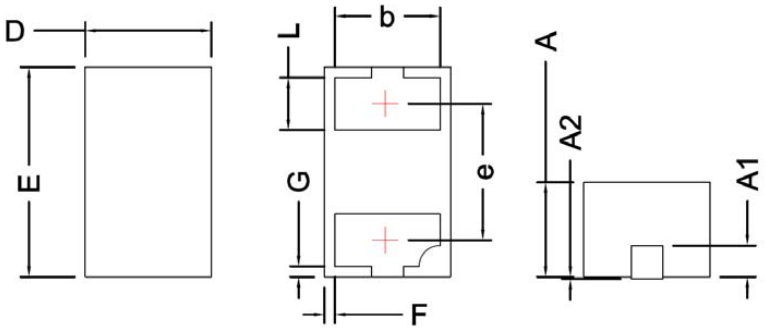

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	0.50	0.60	0.70
E	0.90	1.00	1.10
A	0.35	0.45	0.55
A1		0.15 BSC	
A2			0.10
F	0.005		
G	0.005		
L	0.15	0.25	0.35
b	0.41	0.50	0.59
e		0.65 BSC	

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com , or consult your nearest Yangjie's sales office for further assistance.