


1-Line , Transient Voltage Suppressor For ESD Protection


Uni-directional





Bi-directional





SOD-123FL

Features


- Ultra small package
- Stand-off voltage: 5V ~36V
- Transient protection for each line according to
  IEC61000-4-2(ESD): ±30kV (contact)
  IEC61000-4-4 (EFT): 80A (5/50ns)
  IEC61000-4-5(surge) :
  8/20μs waveform: I_{PPM} see Table 4
- Low clamping voltage
- RoHS Compliant

Applications

- Power supply protection
- Power management
- Battery Contacts

Mechanical Characteristics

- Package: SOD-123FL
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below




XX：Marking Cdoe

Uni-directional　　Bi-directional

For uni-directional types the band denotes cathode end, no marking on bi-directional types

■Definitions of electrical characteristics

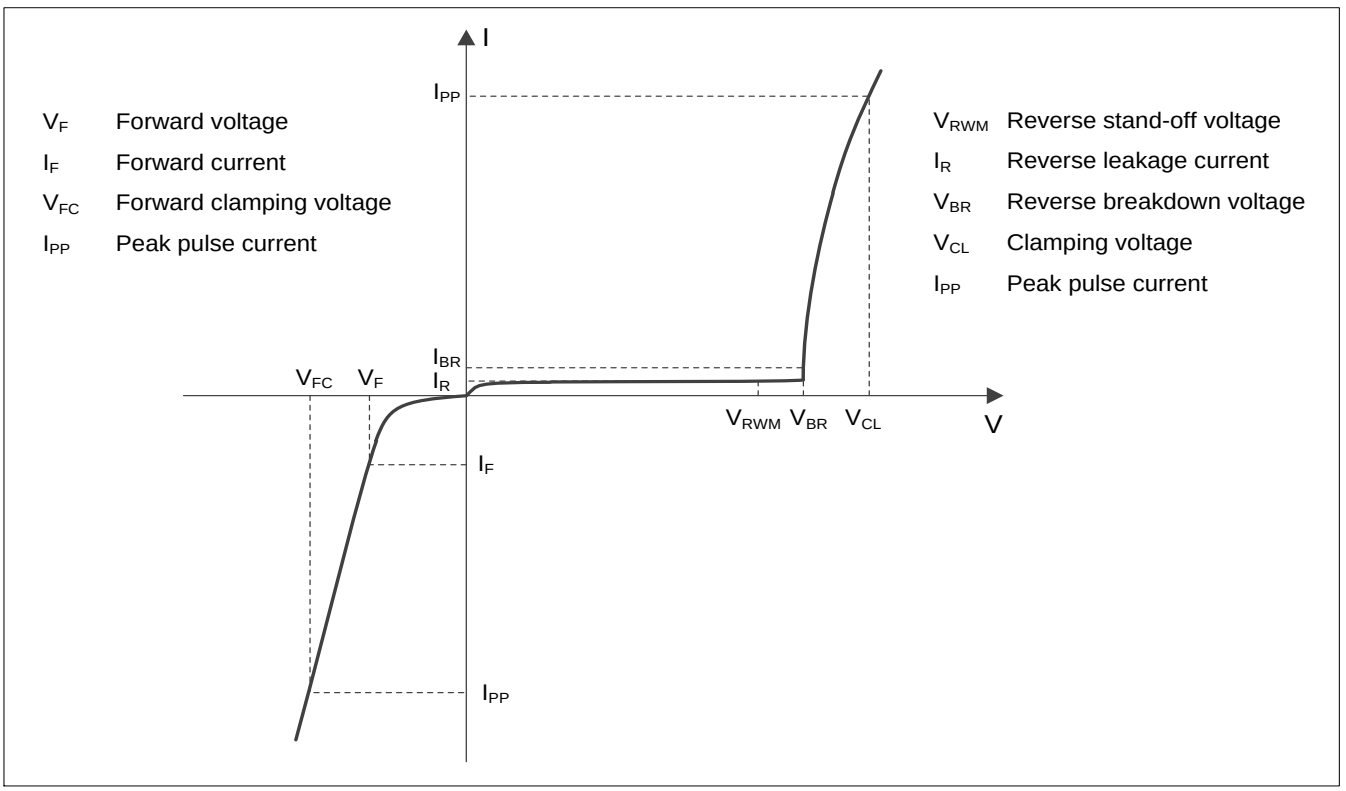

V_F	Forward voltage
I_F	Forward current
V_{FC}	Forward clamping voltage
I_{PP}	Peak pulse current

V_{RWM}	Reverse stand-off voltage
I_R	Reverse leakage current
V_{BR}	Reverse breakdown voltage
V_{CL}	Clamping voltage
I_{PP}	Peak pulse current

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power (t_p = 8/20μs)	P_{pk}	1300	W
ESD IEC61000-4-2(ESD)Air	V_{ESD}	±30	KV
ESD IEC61000-4-2(ESD)Contact		±30	KV
Operating Temperature Range	T_J	-55~150	℃
Storage Temperature Range	T_{STG}	-55~150	℃

■Electrical Characteristics（Ta=25℃ Unless otherwise specified）

Uni-directional

Part Number	Marking Code	Reverse Working Voltage V_{RWM}(V)	Breakdown Voltage V_{BR}(V)@I_T			Reverse Leakage Current I_R(μA)@V_{RWM}	Forward Voltage V_F(V)@I_F=10mA		Junction Capacitance Cj(pF)@ VR=0V,f=1MHz	
		Max	Min	Max	IT mA	Max	Min	Max	Typ	Max
ESD5V0F1	05	5	6.4	7.1	10	400	0.45	1.5	1600	2000
ESD7V0F1	07	7	7.7	8.7	1	100	0.45	1.5	900	1200
ESD12VF1	12	12	13.2	15	1	2.5	0.45	1.5	600	900
ESD15VF1	15	15	16.5	19	1	1	0.45	1.5	450	700
ESD18VF1	18	18	20.0	23	1	1	0.45	1.5	400	600
ESD24VF1	24	24	26.7	30	1	1	0.45	1.5	270	400
ESD36VF1	36	36	40	45	1	1	0.45	1.5	200	300

Bi-directional

Part Number	Marking Code	Reverse Working Voltage V_{RWM}(V)	Breakdown Voltage V_{BR}(V)@I_T			Reverse Leakage Current I_R(μA)@V_{RWM}	Junction Capacitance Cj(pF)@ VR=0V,f=1MHz	
		Max	Min	Max	IT mA	Max	Typ	Max
ESD5V0F1B	5B	5	6.4	7.1	10	400	850	1200
ESD7V0F1B	7B	7	7.7	8.7	1	100	700	900
ESD12VF1B	12B	12	13.2	15	1	2.5	400	600
ESD15VF1B	15B	15	16.5	19	1	1	250	400
ESD18VF1B	18B	18	20.0	23	1	1	170	250
ESD24VF1B	24B	24	26.7	30	1	1	160	240
ESD36VF1B	36B	36	40	45	1	1	100	160

Part Number		Rated peak pulse current IPP （A） 1)	Clamping voltage VCL(V) @ IPP（A） 1)	
Uni	Bi	Max	Typ	Max
ESD5V0F1	ESD5V0F1B	105	-	12
ESD7V0F1	ESD7V0F1B	85	-	16
ESD12VF1	ESD12VF1B	50	-	26
ESD15VF1	ESD15VF1B	40	-	32
ESD18VF1	ESD18VF1B	35	-	38
ESD24VF1	ESD24VF1B	25	-	51
ESD36VF1	ESD36VF1B	17	-	75

Notes:

(1). Non-repetitive current pulse, according to IEC61000-4-5. (8/20μs current waveform).

■Typical Performance Characteristics (T_a=25℃ unless otherwise Specified)

Fig.1 8/20μs waveform per IEC61000-4-5

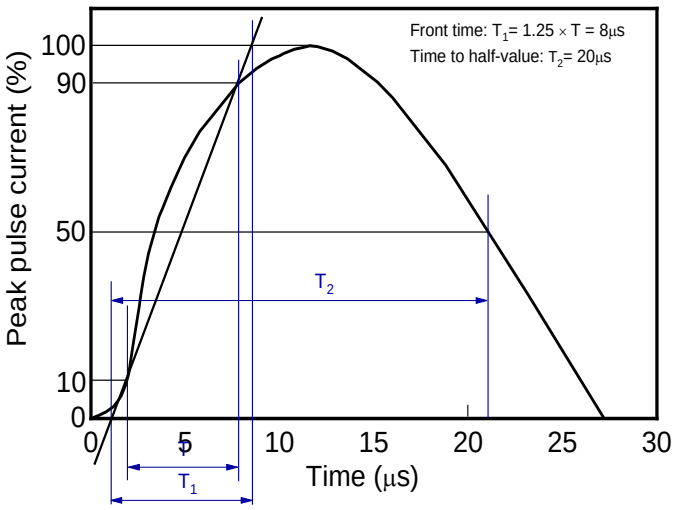


Fig.2 Contact discharge current waveform per IEC61000-4-2

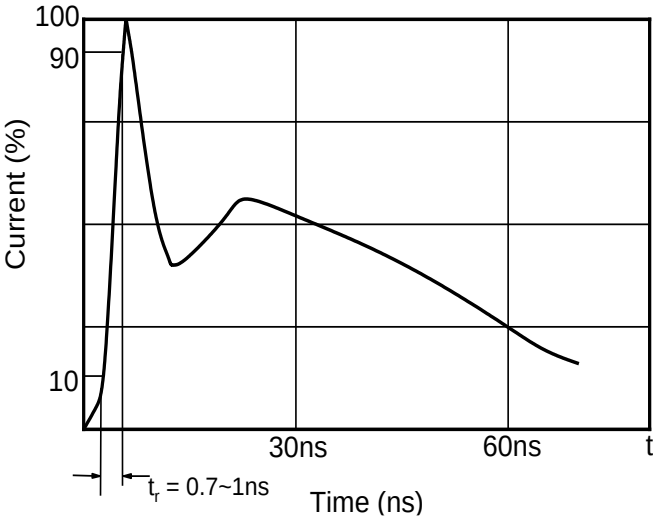


Fig.3 Non-repetitive peak pulse power vs. Pulse time



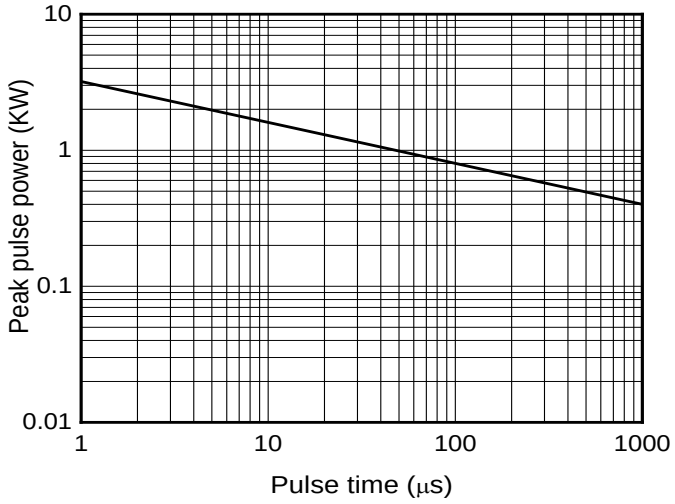


Fig.6 Power derating vs. Ambient temperature

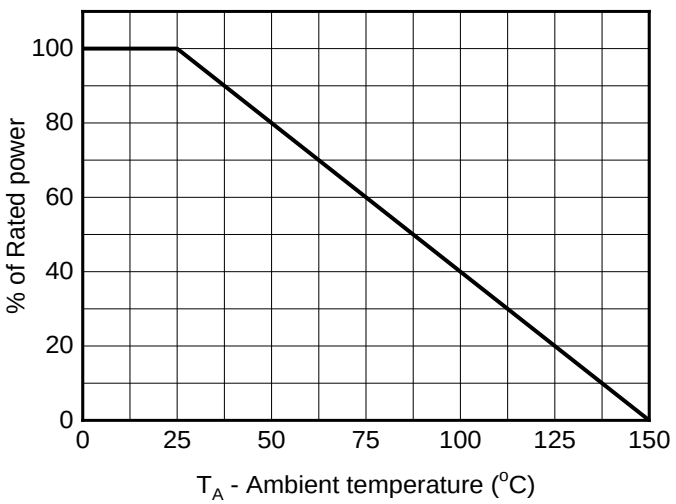


■Outline Dimensions

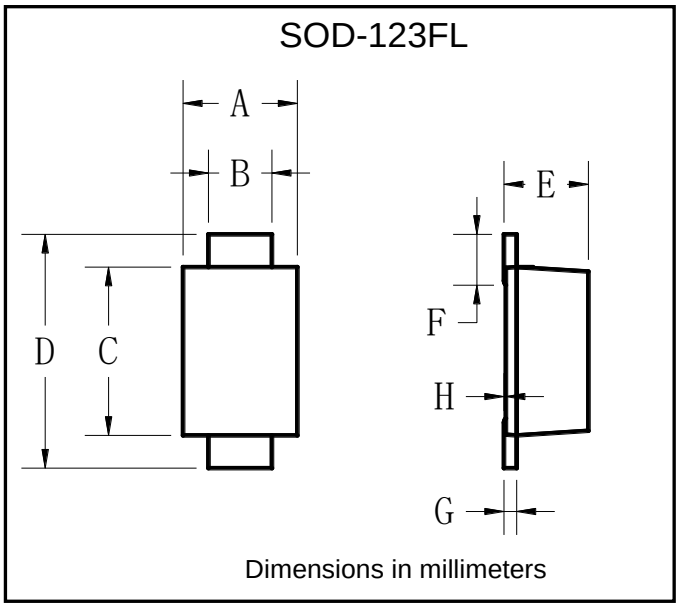

SOD-123FL		
Dim	Min	Max
A	1.60	1.90
B	0.90	1.10
C	2.55	2.85
D	3.60	3.90
E	1.00	1.20
F	0.40	0.90
G	0.10	0.25
H	0.00	0.05

■Recommend land pattern (Unit:mm)

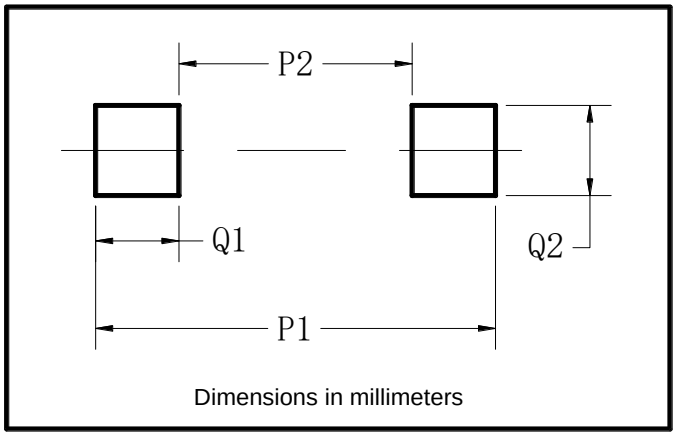

SOD-123FL	
Dim	Millimeters
P1	3.90
P2	1.90
Q1	1.00
Q2	1.50

Notes:
This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.