

Zener Diode





SOT-23

Features

- Moisture sensitivity level 1
- Zener voltage 2.4V~47V

Application

- Linear voltage regulator
- DC regulator
- Small-signal surge protection

Mechanical data

- **Package**: SOT-23
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Limiting Values (Absolute Maximum Rating, T_a=25℃ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Maximum Forward Voltage @I_F=10mA	V_F	0.9	V
Power Dissipation	PD	300	mW
Thermal Resistance from Junction to Ambient	RθJA	417	℃ /W
Maximum junction temperature	Tj	-55~+150	℃
Storage Temperature Range	TSTG	-55~+150	℃

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
AZ23C2V4-AZ23C47	F2	Approximate 0.008	3000	30000	120000	7" reel

■Electrical Characteristics（Ta=25℃ Unless otherwise specified）

Type Numbe	Marking Code	V_z at IzT (V)			Z_{zt}(Ω)		Z_{zk}(Ω)		I_R(μA)@V_R		Diode capacitance Cd (pF)	Non-repetitive peak reverse current Izsm (A)
		Min.	Typ.	Max.	Max.	I_{ZT}(mA)	Max.	I_{zk}(mA)	Max	V_R(V)	Max	Max
AZ23C2V4	KD0	2.28	2.4	2.56	100	5	600	1	50	1	450	6
AZ23C2V7	KD1	2.5	2.7	2.9	100	5	600	1	20	1	450	6
AZ23C3V0	KD2	2.8	3.0	3.2	95	5	600	1	10	1	450	6
AZ23C3V3	KD3	3.1	3.3	3.5	95	5	600	1	5	1	450	6
AZ23C3V6	KD4	3.4	3.6	3.8	90	5	600	1	5	1	450	4.5
AZ23C3V9	KD5	3.7	3.9	4.1	90	5	600	1	3	1	450	4.5
AZ23C4V3	KD6	4.0	4.3	4.6	90	5	600	1	3	1	450	3.5
AZ23C4V7	KD7	4.4	4.7	5.0	80	5	500	1	3	2	300	3.5
AZ23C5V1	KD8	4.8	5.1	5.4	60	5	480	1	2	2	300	3
AZ23C5V6	KD9	5.2	5.6	6.0	40	5	400	1	1	2	200	3
AZ23C6V2	KDA	5.8	6.2	6.6	10	5	150	1	3	4	200	3
AZ23C6V8	KDB	6.4	6.8	7.2	15	5	80	1	2	4	200	2
AZ23C7V5	KDC	7.0	7.5	7.9	15	5	80	1	1	5	150	2
AZ23C8V2	KDD	7.7	8.2	8.7	15	5	80	1	0.7	5	150	2
AZ23C9V1	KDE	8.5	9.1	9.6	15	5	100	1	0.5	6	150	1.8
AZ23C10	KDF	9.4	10	10.6	20	5	150	1	0.2	7	90	1.8
AZ23C11	KDG	10.4	11	11.6	20	5	150	1	0.1	8	85	1.8
AZ23C12	KDH	11.4	12	12.7	25	5	150	1	0.1	8	85	1.8
AZ23C13	KDI	12.4	13	14.1	30	5	170	1	0.1	8	80	1
AZ23C15	KDJ	13.8	15	15.6	30	5	200	1	0.1	10.5	75	1
AZ23C16	KDK	15.3	16	17.1	40	5	200	1	0.1	11.2	75	1
AZ23C18	KDL	16.8	18	19.1	45	5	225	1	0.1	12.6	70	1
AZ23C20	KDM	18.8	20	21.2	55	5	225	1	0.1	14	60	1
AZ23C22	KDN	20.8	22	23.3	55	5	250	1	0.1	15.4	60	0.6
AZ23C24	KDO	22.8	24	25.6	70	5	250	1	0.1	16.8	55	0.6
AZ23C27	KDP	25.1	27	28.9	80	2	300	1	0.1	18.9	50	0.6

AZ23C30	KDQ	28	30	32	80	2	300	1	0.1	21.0	50	0.6
AZ23C33	KDR	31	33	35	80	2	325	1	0.1	23.1	45	0.6
AZ23C36	KDS	34	36	38	90	2	350	1	0.1	25.2	45	0.6
AZ23C39	KDT	37	39	41	130	2	350	1	0.1	27.3	45	0.6
AZ23C43	D30	40.85	43	45.15	150	5	375	1	0.1	30.1	40	0.6
AZ23C47	D31	44.65	47	49.35	170	5	375	1	0.1	32.9	40	0.5

■ **Characteristics**(Typical)

Fig 1：P_D-Ta Curve

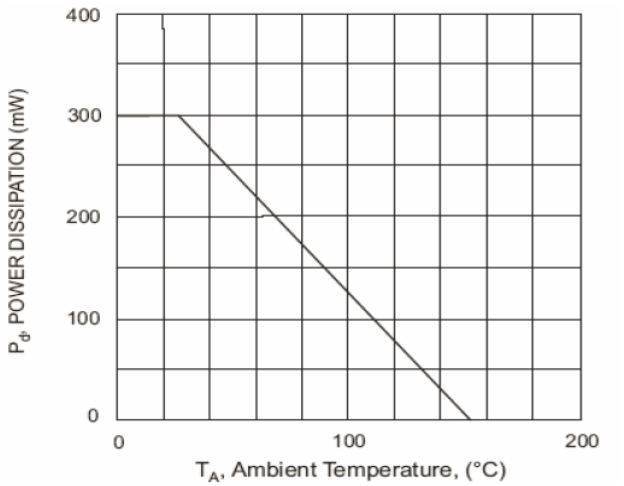


Fig 2：Zener Breakdown Characteristics

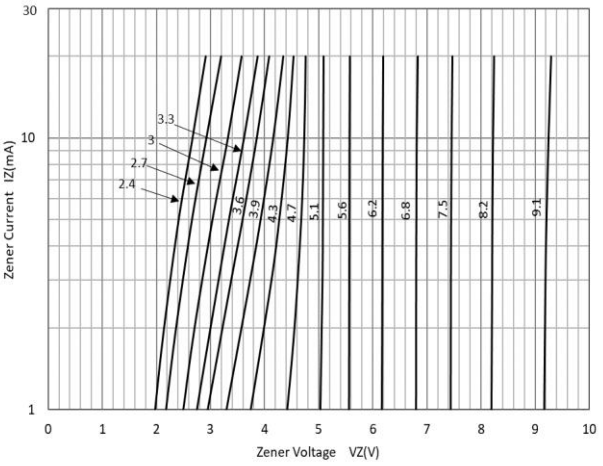


Fig 3：Zener Breakdown Characteristics

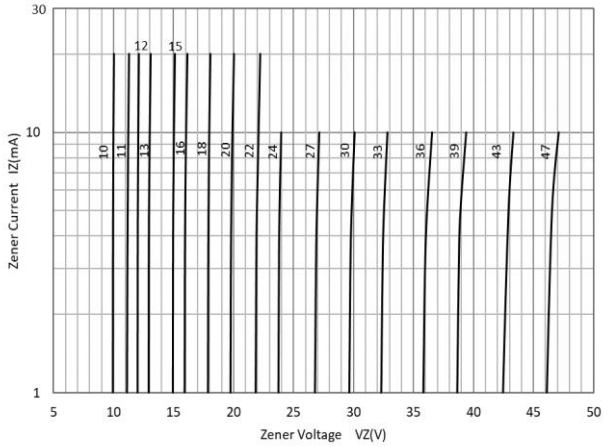


Fig 4 Typical Temperature Coeffient

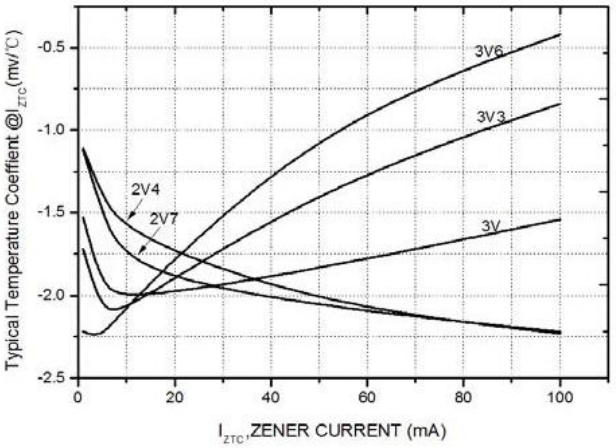


Fig 5 Typical Temperature Coeffient

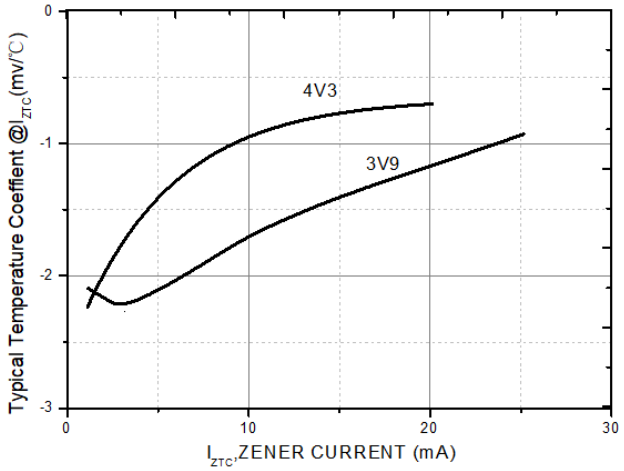


Fig 6：Typical Temperature Coeffient

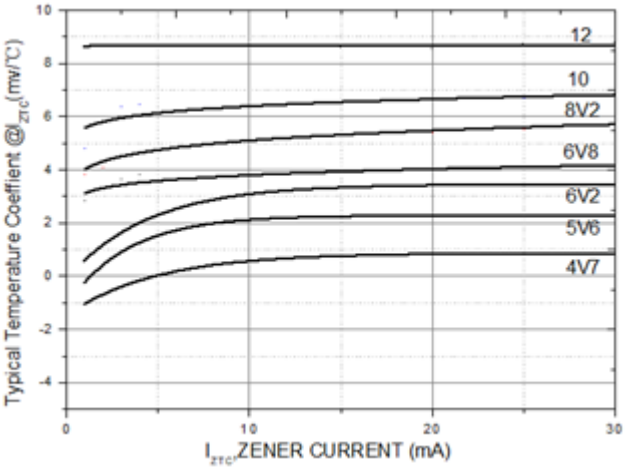


Fig 7：Typical Temperature Coeffient

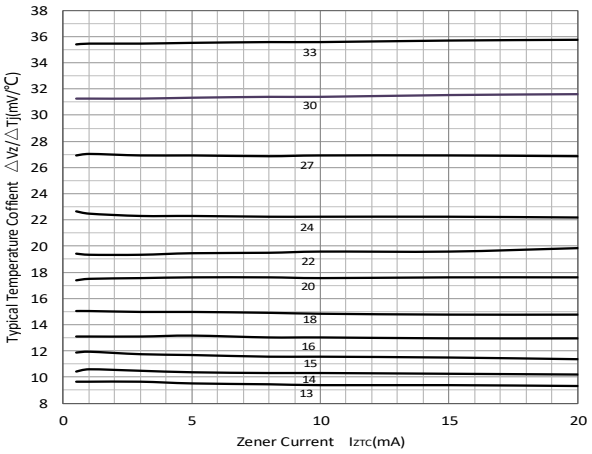


Fig 8：Typical Temperature Coeffient

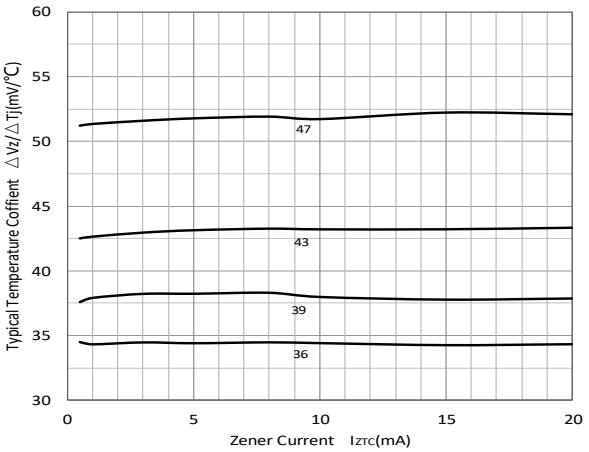


Fig 9：Typical Forward Voltage

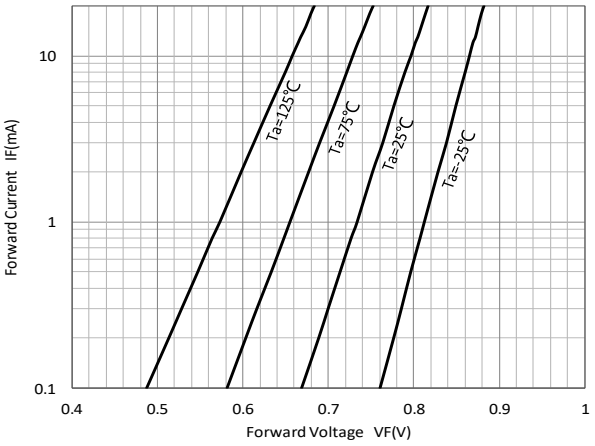


Fig 10：Typical Reverse Current



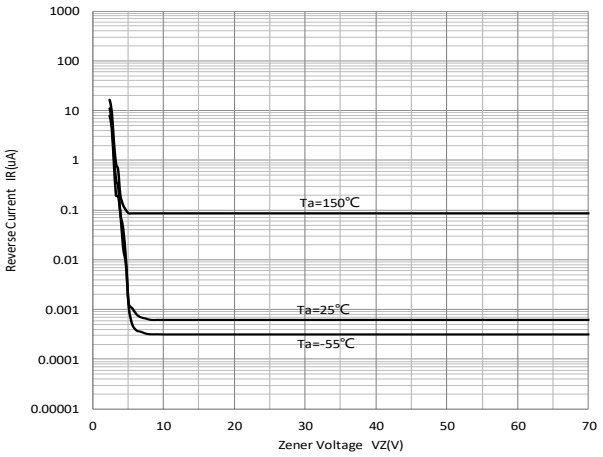



Fig 11：Typical Capacitance

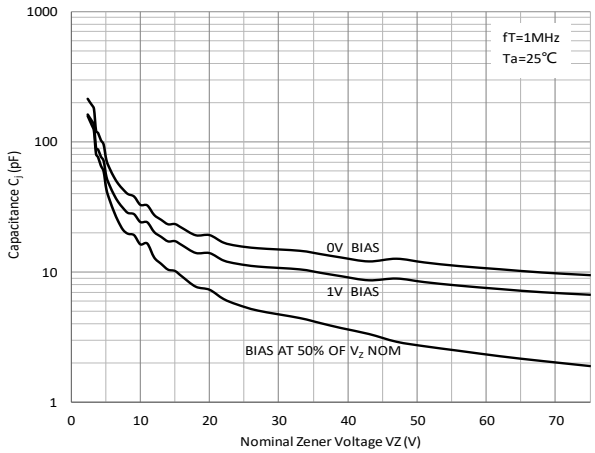


■SOT-23 Package Outline Dimensions

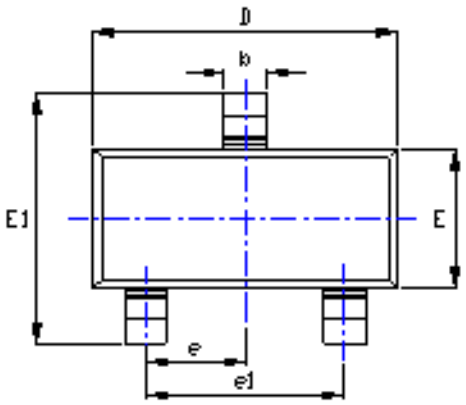

TOP VIEW

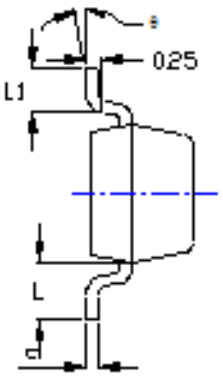


SIDE VIEW

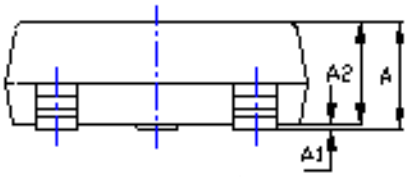

SIDE VIEW

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23Suggested Pad Layout

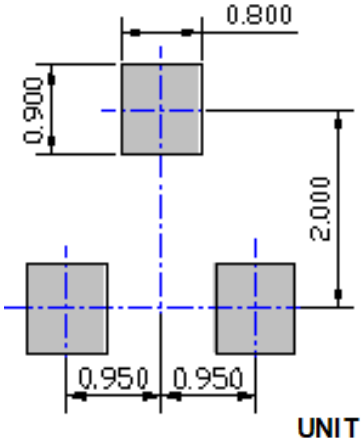

UNIT : mm

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.