
NPN+PNP Transistor

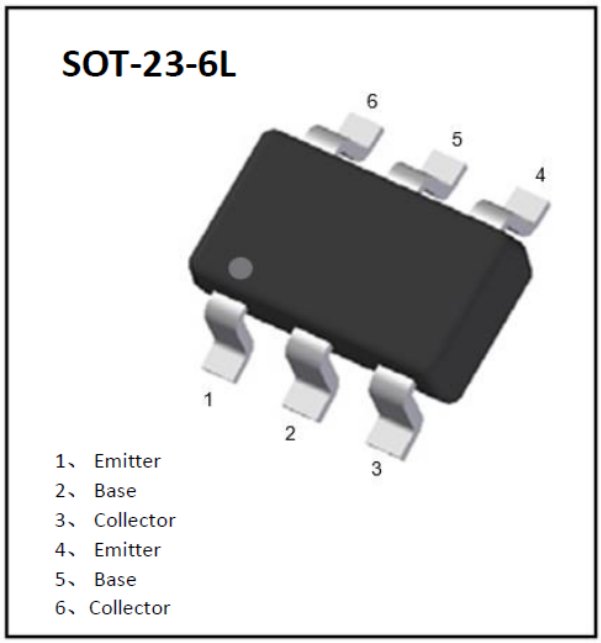


Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally Suited for Automatic Insertion
- NPN+PNP

Mechanical Data

- **Package:** SOT-23-6L
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 8017

■Equivalent circuit

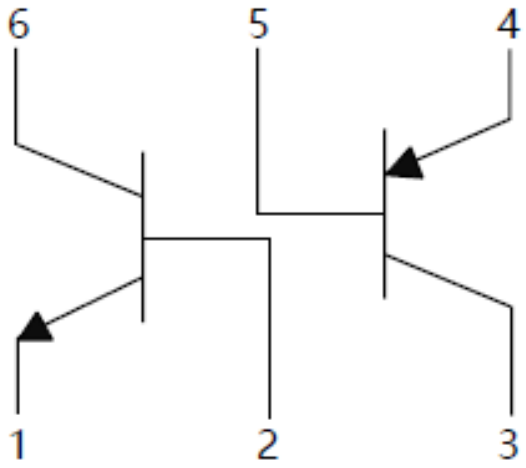

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BC817DPN	F2	Approximate 15.6	3000	30000	120000	7” reel

■ NPN Transistor（Pin1、2、6）Maximum Ratings (Ta=25℃ Unless otherwise specified）

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	50
Collector-Emitter Voltage	V_{CEO}	V	45
Emitter –Base Voltage	V_{EBO}	V	5
Collector Current	I_C	mA	500
Collector Power Dissipation	P_C	mW	330
Operation Junction Temperature	T_j	℃	150
Storage Temperature	T_{stg}	℃	-55 to +150

■ PNP Transistor（Pin3、4、5）Maximum Ratings (Ta=25℃ Unless otherwise specified）

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-50
Collector-Emitter Voltage	V_{CEO}	V	-45
Emitter –Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	mA	-500
Collector Power Dissipation	P_C	mW	330
Operation Junction Temperature	T_j	℃	150
Storage Temperature	T_{stg}	℃	-55 to +150

■NPN Transistor （Pin1、2、6）Electrical Characteristics (Ta=25℃ unless otherwise specified)


Item	Symbol	Unit	Conditions	MIN	MAX
Collector-Emitter Voltage	V_{CEO}	V	I_C=10mAdc, I_B=0	45	-
Collector-Base Voltage	V_{CBO}	V	I_C=10uAdc, I_E=0	50	-
Emitter-Base Voltage	V_{EBO}	V	I_E=1uAdc, I_C=0	5.0	-
Emitter-base Cut-off Current	I_{EBO}	nA	V_{EB}=5Vdc, I_C=0	-	100
Collector-base Cut-off Current	I_{CBO}	nA	V_{CB}=20Vdc, I_E=0	-	100
DC Current Gain	h_{FE1}		I_C=100mAdc, V_{CE}=1.0Vdc	160	400
	h_{FE2}		I_C=500mAdc, V_{CE}=1.0Vdc	40	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	I_C=500mAdc, I_B=50mAdc	-	0.7
Base-Emitter Saturation Voltage	V_{BE}	V	I_C=500mAdc, V_{CE}=1.0Vdc	-	1.2
Transition frequency	f_T	MHz	I_C=10mA,V_{CE}=5.0V, f=100MHz	100	-

■PNP Transistor （Pin3、4、5）Electrical Characteristics (Ta=25℃ unless otherwise specified)


Item	Symbol	Unit	Conditions	MIN	MAX
Collector-Emitter Voltage*	V_{CEO}	V	I_C=-10mAdc, I_B=0	-45	-
Collector-Base Voltage	V_{CBO}	V	I_C=-10uAdc, I_E=0	-50	-
Emitter-Base Voltage	V_{EBO}	V	I_E=-1uAdc, I_C=0	-5.0	-
Emitter-base Cut-off Current	I_{EBO}	nA	V_{EB}=-5Vdc, I_C=0	-	-100
Collector-base Cut-off Current	I_{CBO}	nA	V_{CB}=-20Vdc, I_E=0	-	-100
DC Current Gain	h_{FE1}		I_C=-100mAdc, V_{CE}=-1.0Vdc	160	400
	h_{FE2}		I_C=-500mAdc, V_{CE}=-1.0Vdc	40	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	I_C=-500mAdc, I_B=-50mAdc	-	-0.7
Base-Emitter Saturation Voltage	V_{BE}	V	I_C=-500mAdc, V_{CE}=-1.0Vdc	-	-1.2
Transition frequency	f_T	MHz	I_C=-10mA,V_{CE}=-5.0V, f=100MHz	100	-

■ NPN Transistor （Pin1、2、6）Characteristics (Typical)


Static Characteristic

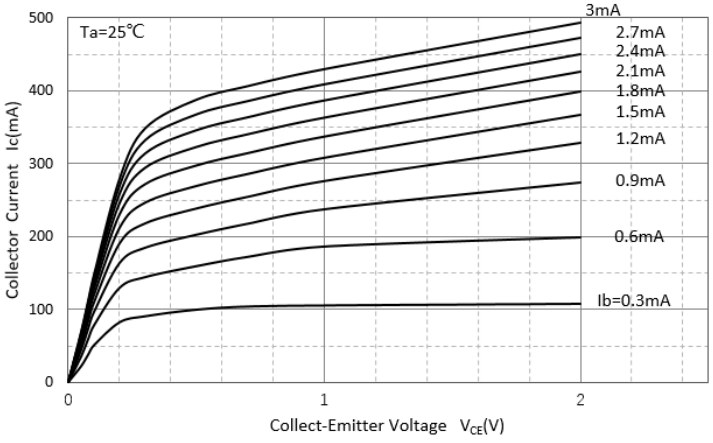


DC Current Gain

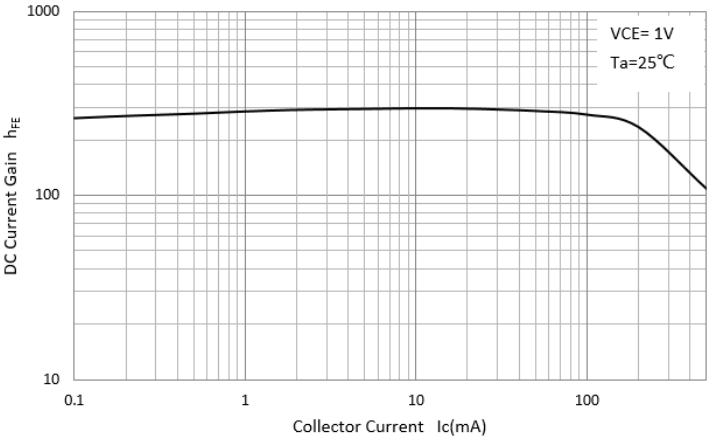


Collector-Emitter Saturation Voltage

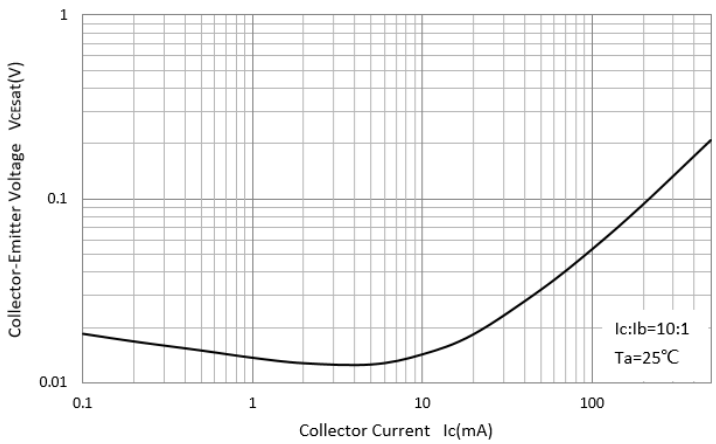


Base-Emitter Saturation Voltage

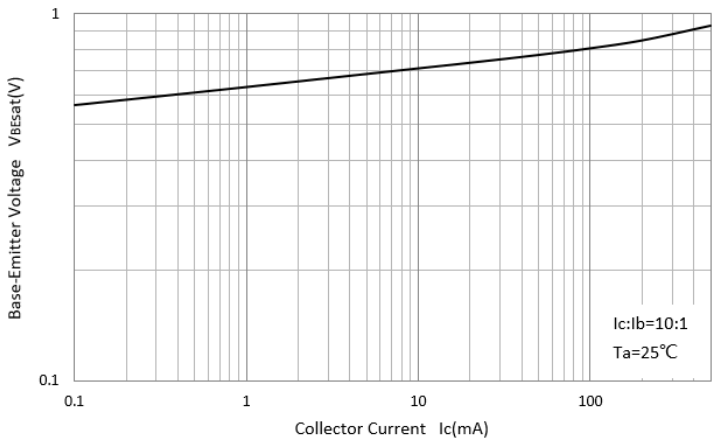

Base-Emitter On Voltage

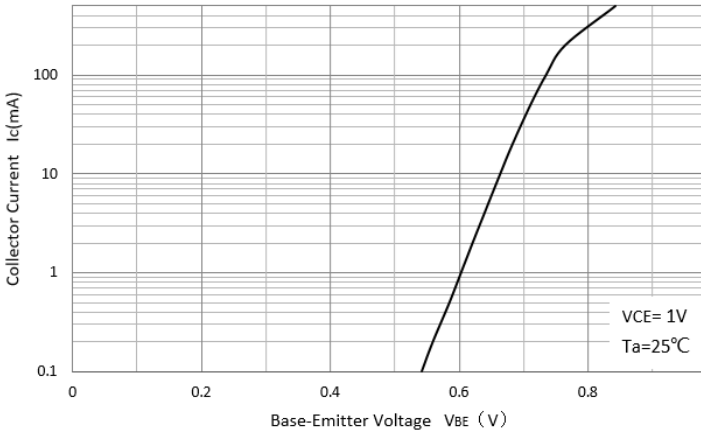


Cob/Cib-V_{CB}/V_{EB}

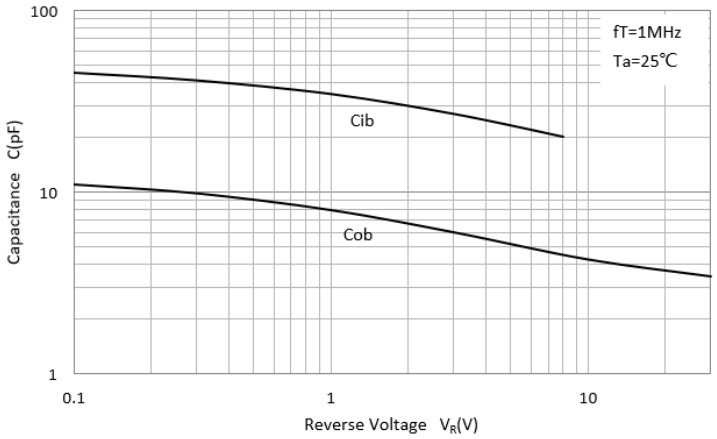


■ PNP Transistor （Pin3、4、5） Characteristics (Typical)


Static Characteristic

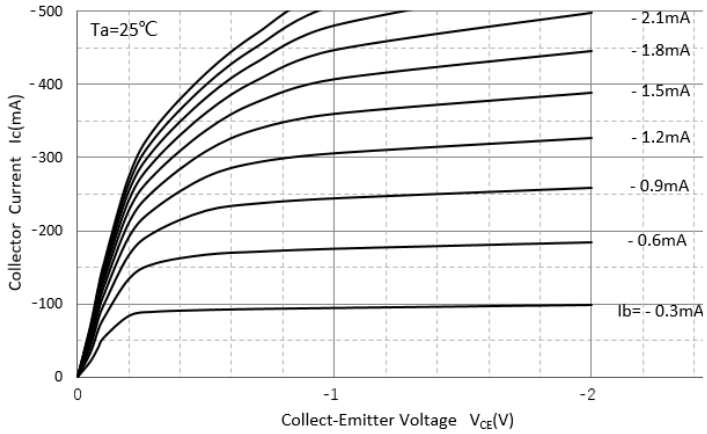


DC Current Gain

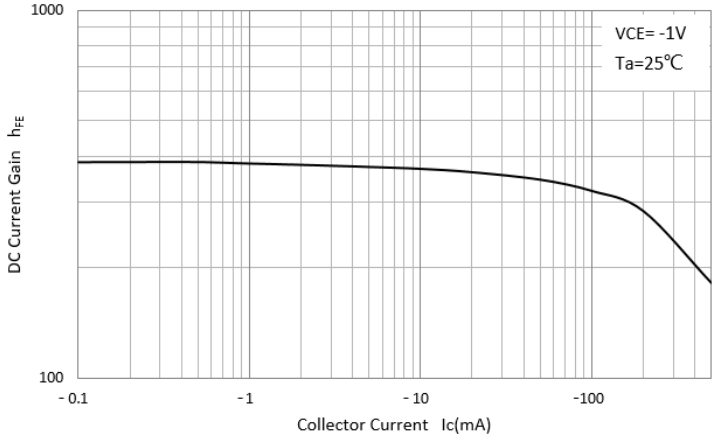


Collector-Emitter Saturation Voltage

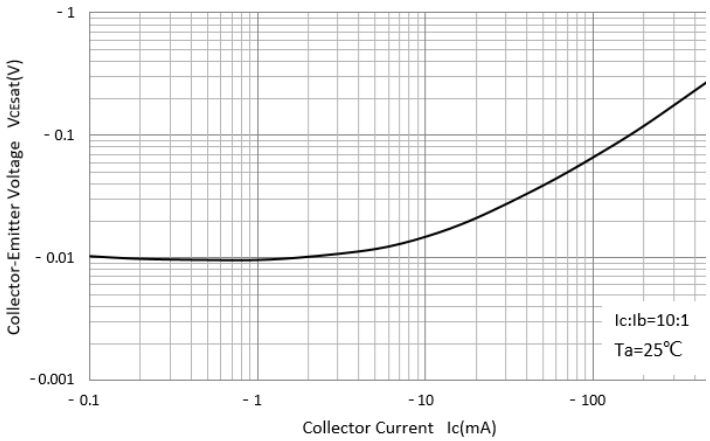


Base-Emitter Saturation Voltage

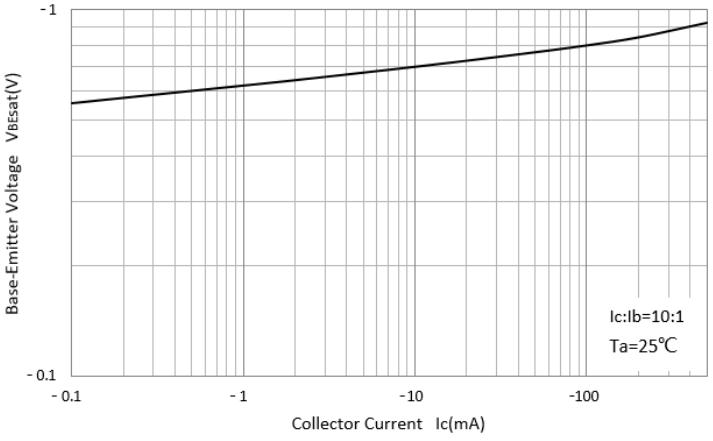


Base-Emitter On Voltage

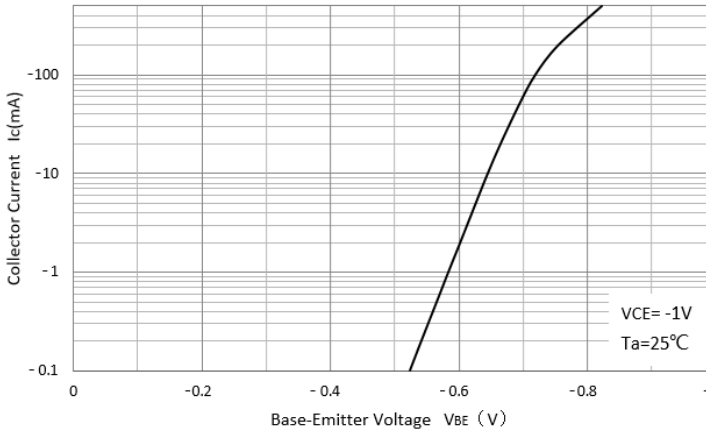

Cob/Cib-V_{CB}/V_{EB}

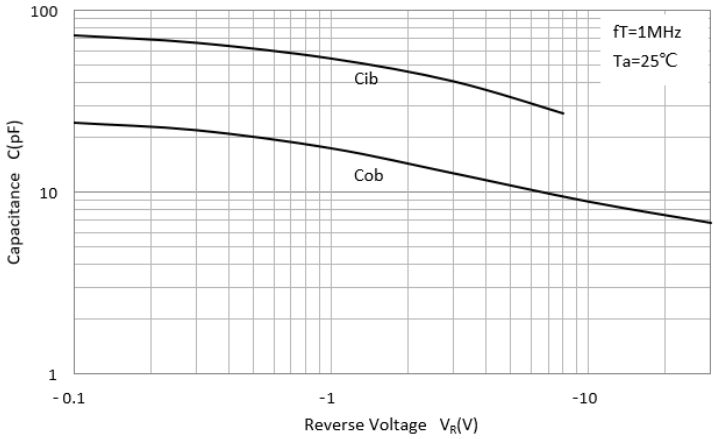

■SOT-23-6L Package information

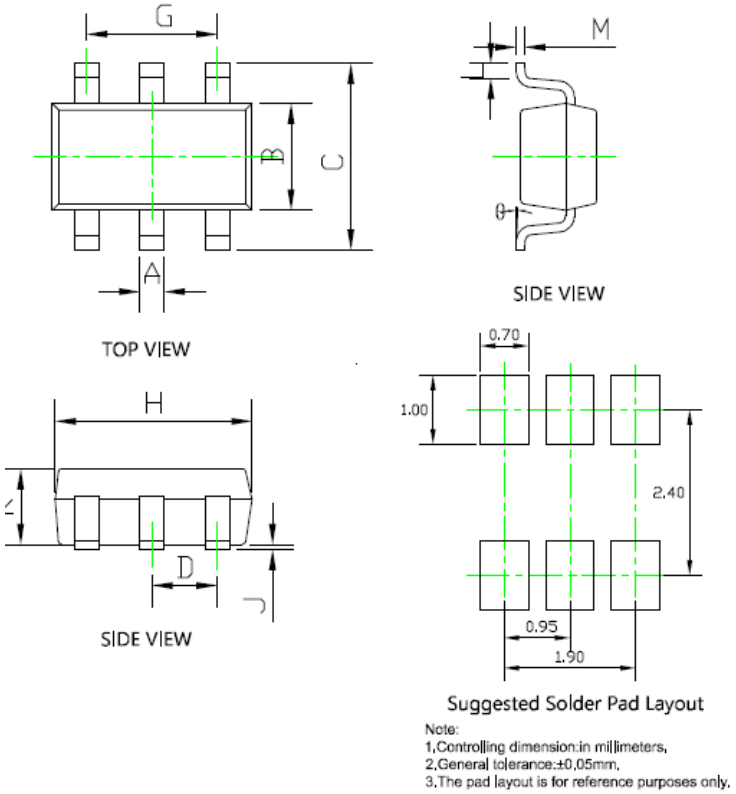

Note:
1,Controlling dimension:in millimeters,
2,General tolerance:±0.05mm.
3,The pad layout is for reference purposes only.

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.012	0.020	0.300	0.500
B	0.059	0.067	1.500	1.700
C	0.104	0.116	2.650	2.950
D	0.037BSC		0.950BSC	
G	0.075BSC		1.900BSC	
H	0.111	0.119	2.820	3.020
J	0.000	0.004	0.000	0.100
K	0.041	0.045	1.050	1.150
L	0.012	0.024	0.300	0.600
M	0.004	0.008	0.100	0.200
θ	0°	8°	0°	8°

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.