

NPN Transistor





1. Base
2. Emitter
3. Collector

SOT-723

Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for auto matic insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package**: SOT-723
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ **Maximum Ratings** (T_a=25℃ Unless otherwise specified)

Item	Symbol	Unit	Conditions		Value
Device marking code			BC846AM3		1A
			BC846BM3		1B
			BC847AM3		1E
			BC847BM3		1F
			BC847CM3		1G
			BC848AM3		1J
			BC848BM3		1K
			BC848CM3		1L
Collector-base voltage	V_{CBO}	V	BC846	I_C=10uA,I_E=0	80
			BC847		50
			BC848		30
Collector-emitter voltage	V_{CEO}	V	BC846	I_C=10mA,I_B=0	65
			BC847		45
			BC848		30

Emitter-base voltage	V_{EBO}	V	I_E=10uA,I_C=0	6
Collector current	I_C	mA		100
Power dissipation	P_D	mW		100
Junction temperature	T_J	℃		-55 to +150
Storage temperature	T_{STG}	℃		-55 to +150

■ Electrical Characteristics (Ta=25℃ Unless otherwise specified)

Item	Symbol	Unit	Conditions		Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	BC846	I_C=10uA,I_E=0	80		
			BC847		50		
			BC848		30		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	BC846	I_C=10mA,I_B=0	65		
			BC847		45		
			BC848		30		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	I_E=10uA,I_C=0		6		
Collector cut-off current	I_{CBO}	uA	BC846	V_{CB}=70V,I_E=0			0.1
			BC847	V_{CB}=50V,I_E=0			0.1
			BC848	V_{CB}=30V,I_E=0			0.1
Emitter-base cutoff current	I_{EBO}	uA	V_{EB}=5V, I_C=0				0.1
DC current gain	h_{FE}		BC846A,847A,848A	V_{CE}=5V, I_C=2mA	110		220
			BC846B,847B,848B		200		450
			BC847C,BC848C		420		800
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	I_C=100mA,I_B=5mA				0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	I_C=100mA, I_B= 5mA				1.1
Transition frequency	f_T	MHz	V_{CE}=5V,I_C=10mA,f=100MHz		100		
Collector-base output capacitance	Cob	pF	V_{CB}=10V , f=1MHz				4.5

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}$(1)	℃/W	1250
Thermal resistance, junction-to-case	$R_{\theta J-C}$(1)	℃/W	1000

Note:

（1）Thermal resistance from junction to ambient and from junction to case mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

■Characteristics

Fig 1：Static Characteristics

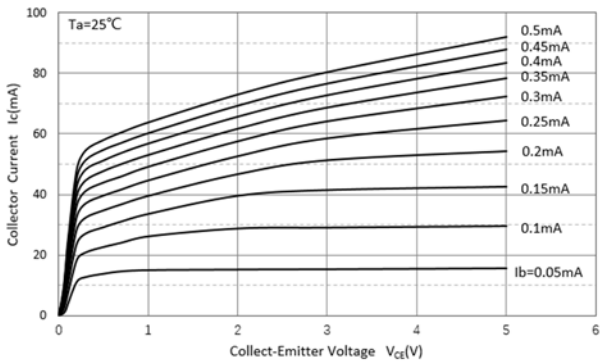


Fig 2：DC Current Gain Characteristics

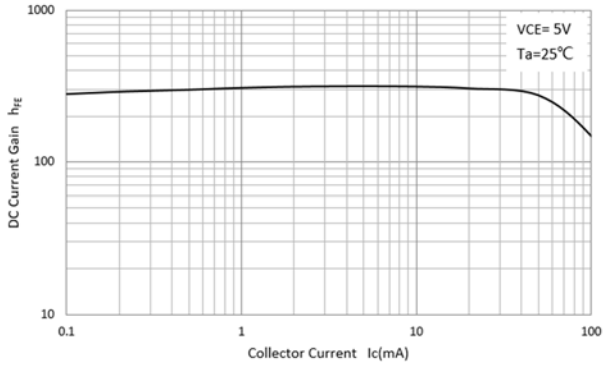


Fig 3：Collector-Emitter Saturation Voltage

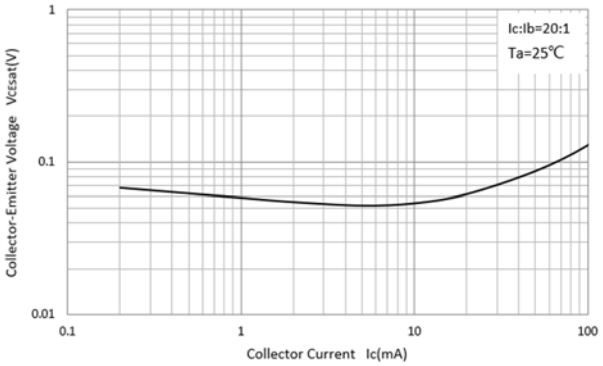


Fig 4：Base-Emitter Saturation Voltage

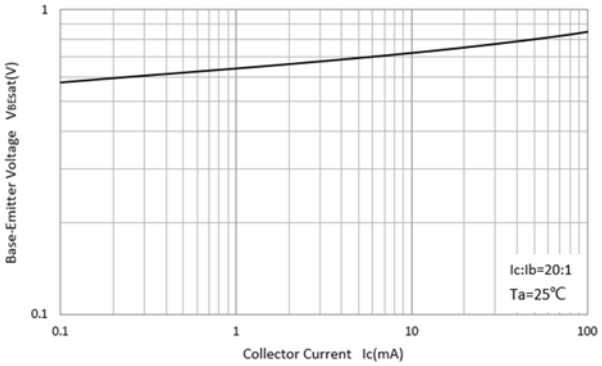


Fig 5：Base-Emitter on Voltage

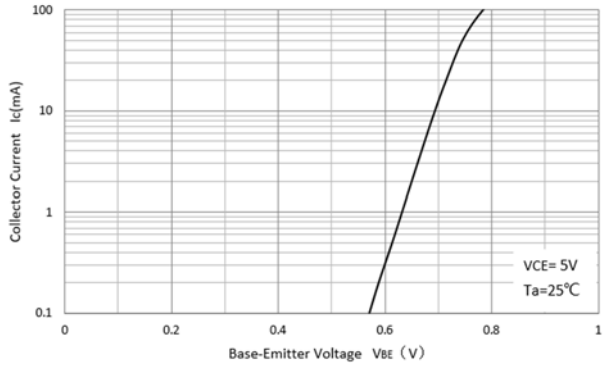


Fig 6：Cob/Cib-V_{CB}/V_{EB}


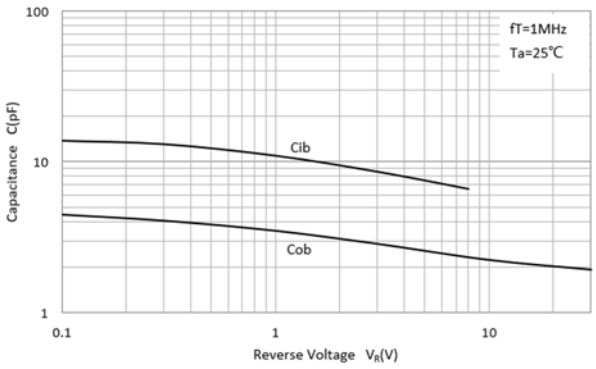



Fig 7：P_D-Ta Curve

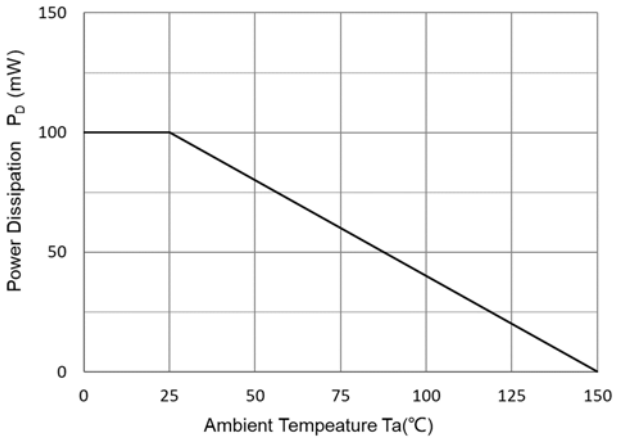


■Ordering Information

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC846AM3 THRU BC848CM3	F2	Approximate 0.0013	8000	80000	320000	7" reel


■ Outline Dimensions

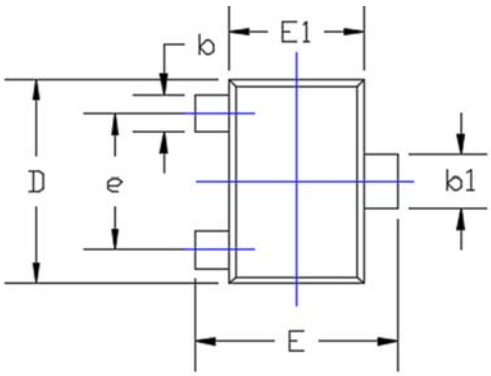

TOP VIEW




SIDE VIEW

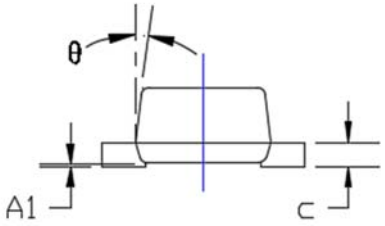

SIDE VIEW

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.017	0.022	0.430	0.550
A1	0.000	0.002	0.000	0.050
b	0.007	0.011	0.170	0.270
b1	0.011	0.015	0.270	0.370
c	0.003	0.008	0.080	0.200
D	0.045	0.049	1.150	1.250
E	0.045	0.049	1.150	1.250
E1	0.030	0.033	0.750	0.850
e	0.031TYP.		0.800TYP.	
θ	7°REF.		7°REF.	

■ Suggested Pad Layout

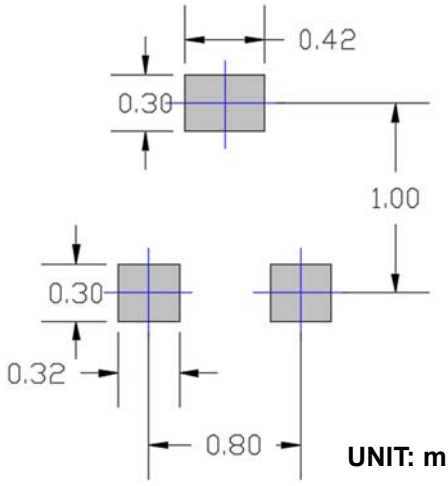

UNIT: mm

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.