
NPN Transistor

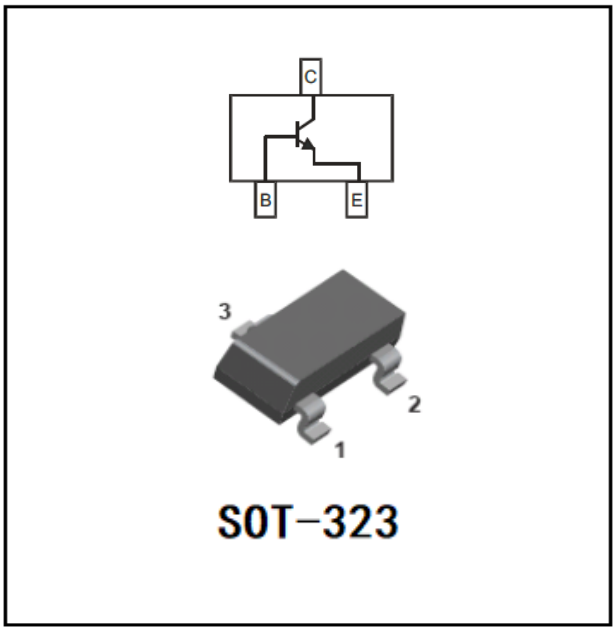

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- High Conductance
- Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- **Package**: SOT-323

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free

- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking**:

BC846AW	1A
BC846BW	1B
BC847AW	1E
BC847BW	1F
BC847CW	1G
BC848AW	1J
BC848BW	1K
BC848CW	1L

■ **Maximum Ratings** (Ta=25℃ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage BC846AW、BC846BW BC847AW、BCB47BW、BC847CW BC848AW、BC848BW、BC848CW	80 50 30	V
V_{CEO}	Collector-Emitter Voltage BC846AW、BC846BW BC847AW、BC847BW、BC847CW BC848AW、BC848BW、BC848CW	65 45 30	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current	0.1	A
P_C	Collector Power Dissipation	200	mW
$R_{\Theta JA}$	Thermal Resistance From Junction To Ambient	625	℃/W
Tj	Junction Temperature	150	℃
Tstg	Storage Temperature	-55～+150	℃

■ Electrical Characteristics (Ta=25℃ unless otherwise noted)


Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage BC846 BC847 BC848	V_{CBO}	IC= 10μA, IE=0	 80 50 30		V
Collector-emitter breakdown voltage BC846 BC847 BC848	V_{CEO}	IC= 10mA, IB=0	 65 45 30		V
Emitter-base breakdown voltage	V_{EBO}	IE= 10μA, IC=0	6		V
Collector-base cut-off current BC846 BC847 BC848	I_{CBO}	VCB=70 V ,IE=0 VCB=50 V ,IE=0 VCB=30 V ,IE=0		0.1	μA
Collector-emitter cut-off current BC846 BC847 BC848	I_{CEO}	VCE=60 V ,IB=0 VCE=45 V ,IB=0 VCE=30 V ,IB=0		0.1	μA
Emitter-base cut-off current	I_{EBO}	VEB=5 V , IC=0		0.1	μA
DC current gain BC846AW,847AW,848AW BC846BW,847BW,848BW BC847CW,BC848CW	h_{FE}	VCE= 5V, IC= 2mA	 110 200 420	 220 450 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	IC=100mA, IB= 5mA		0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	IC=100mA, IB= 5mA		1.1	V
Transition frequency	f_T	VCE= 5 V, IC= 10mA f=100MHz	100		MHz
Collector-base output capacitance	Cob	VCB=10V,f=1MHz		4.5	pF

■ Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BC846AW THRU BC848CW	F2	Approximate 0.005	3000	30000	120000	7” reel

■ **Characteristics**(Typical)


Static Characteristic

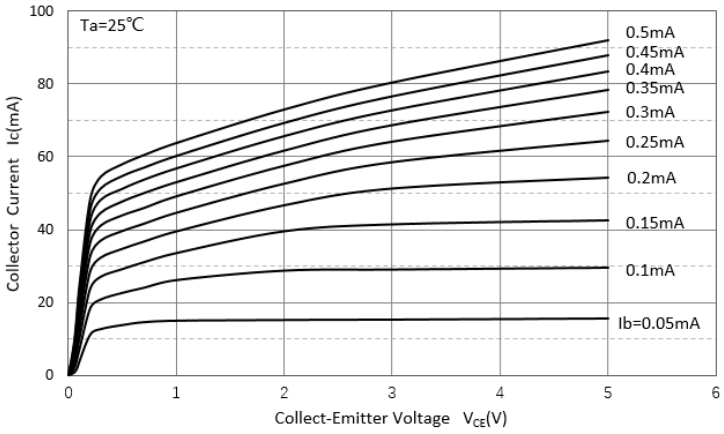


DC Current Gain

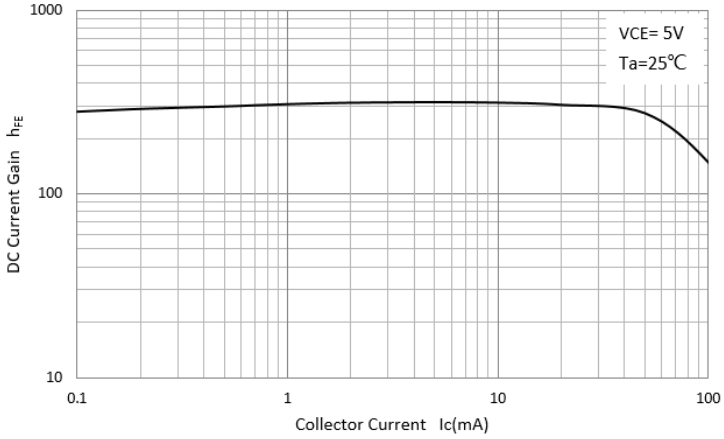


Collector-Emitter Saturation Voltage

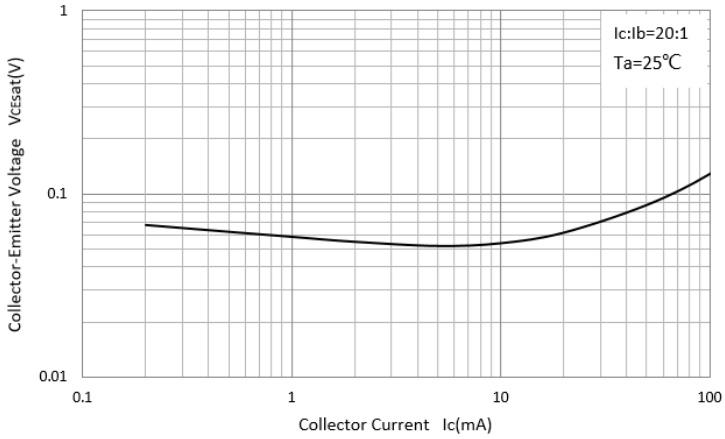


Base-Emitter Saturation Voltage

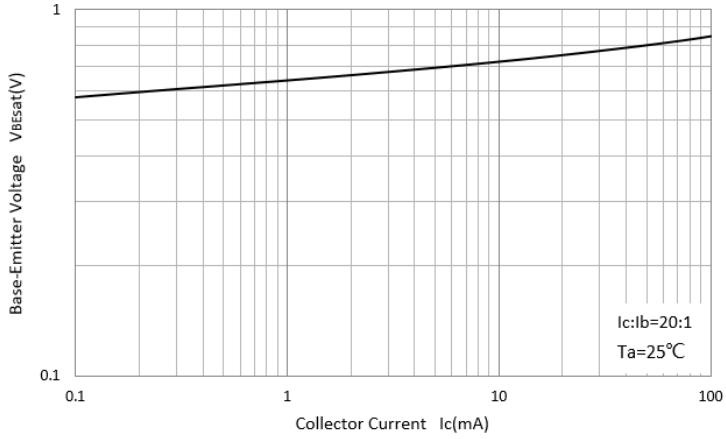


Base-Emitter On Voltage

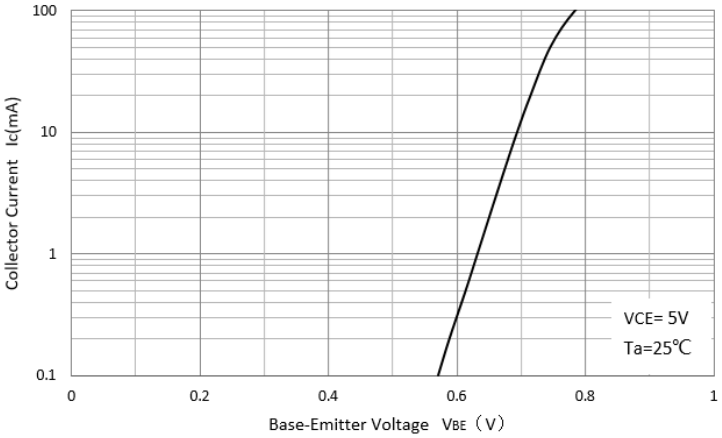


Cob/Cib-V_{CB}/V_{EB}

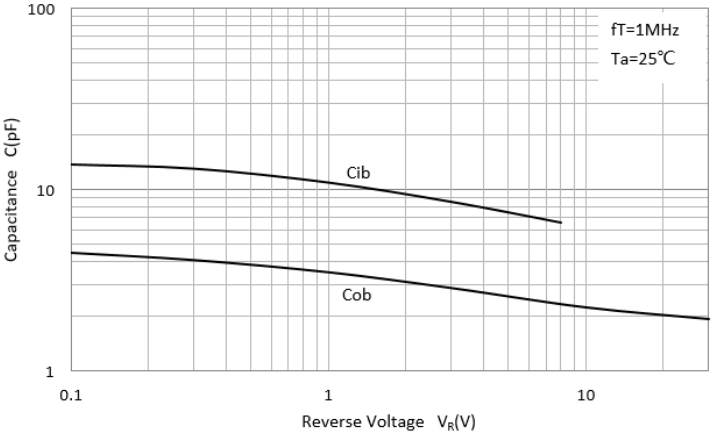

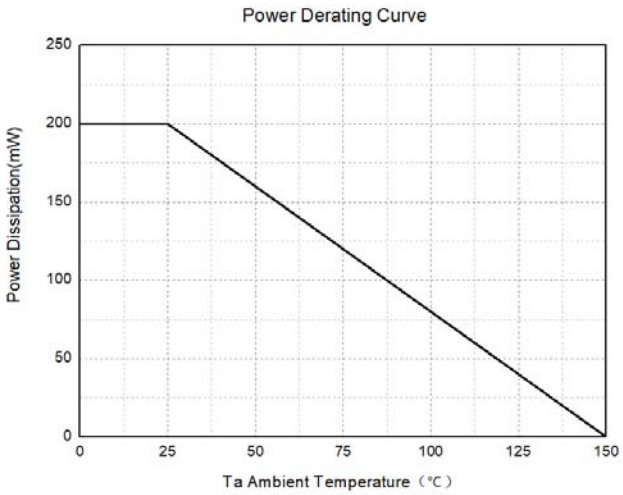


■ SOT-323 Package Outline Dimensions

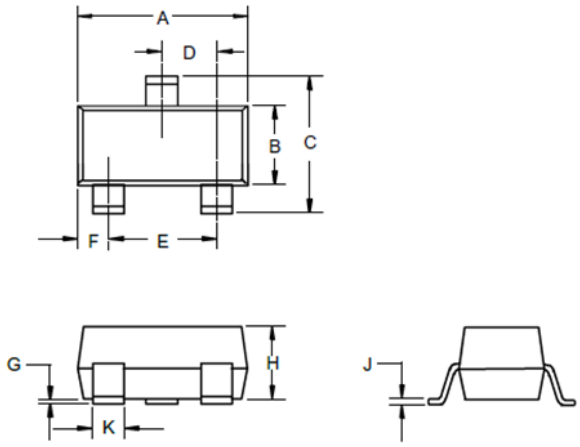

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.083	.096	2.10	2.45	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.006	.016	.15	.40	

■ SOT-323 Soldering Footprint

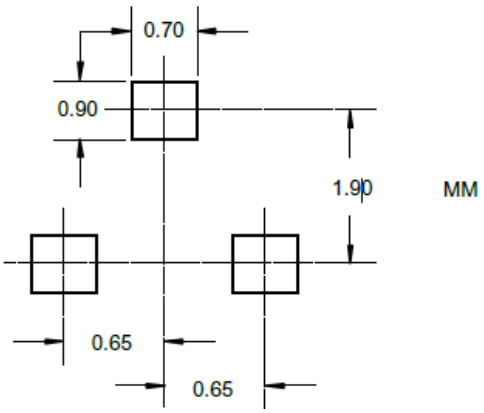

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.