
NPN General Purpose Transistor

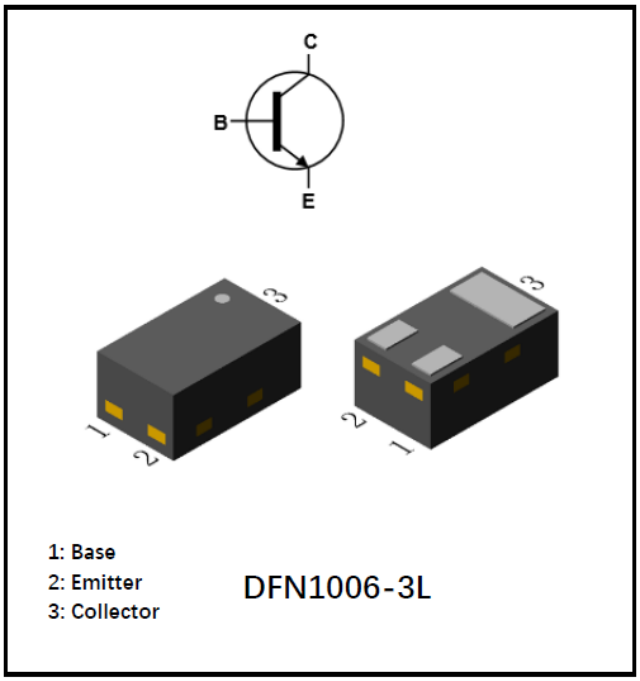

Features

- Lead Free Finish/RoHS Compliant
- Small package saves board space
- Moisture Sensitivity Level 3

Mechanical Data

- **Package**: DFN1006-3L
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking**: D5

■Maximum Ratings (Ta=25℃ Unless otherwise specified)

Symbol	Parameter	Value	Unit
VCBO	Collector-Base Voltage	50	V
VCEO	Collector-Emitter Voltage	45	V
VEBO	Emitter-Base Voltage	6	V
IC	Collector Current	100	mA
PC	Collector Power Dissipation	100	mW
Tj	Junction Temperature	-55～+150	℃
Tstg	Storage Temperature	-55～+150	℃

■Ordering Information (Example)


PREFERED P/N	UNIT WEIGHT(mg)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BC847BM	Approximate 0.89	10K	100K	400K	Tape & Reel

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）


Parameter	Symbol	Test conditions	Min	TYP	Max	Unit
Collector-base breakdown voltage	V_{CBO}	IC= 10μA, IE=0	50	-	-	V
Collector-emitter breakdown voltage	V_{CEO}	IC= 10mA, IB=0	45	-	-	V
Emitter-base breakdown voltage	V_{EBO}	IE= 10μA, IC=0	6	-	-	V
Collector-base cut-off current	I_{CBO}	VCB=30 V ,IE=0	-	-	15	nA
Emitter-base cut-off current	I_{EBO}	VEB=5 V , IC=0	-	-	100	nA
DC current gain	h_{FE}	VCE= 5V, IC= 2mA	200	-	450	
Collector-emitter saturation voltage	$V_{CE(sat)}$	IC=10mA, IB= 0.5mA	-	-	200	mV
	$V_{CE(sat)}$	IC=100mA, IB= 5mA	-	-	400	mV
Base-emitter saturation voltage	$V_{BE(sat)}$	IC=100mA, IB= 5mA	-	0.9	1.1	V
Base-emitter voltage	V_{BE}	VCE= 5V, IC= 2mA	580	-	700	mV
	V_{BE}	VCE=5V, IC= 10mA	-	-	770	mV
Transition frequency	f_T	VCE=5V, IC= 10mA f=100MHz	100	-	-	MHz
Collector-base output capacitance	Cob	VCB=10V,f=1MHz	-	-	4.5	pF

■ **Characteristics** (Typical)


Static Characteristic

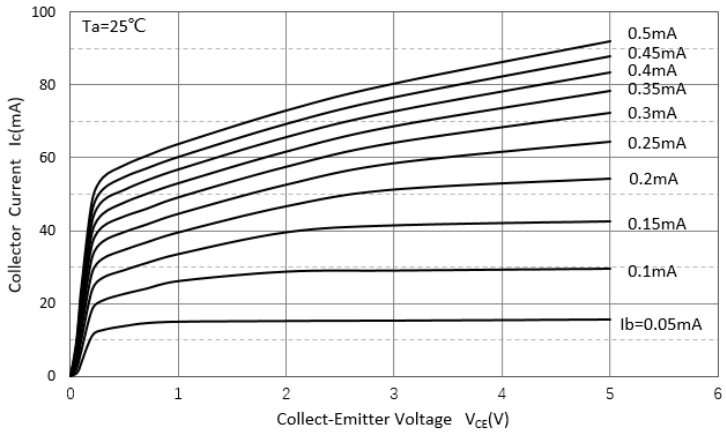


DC Current Gain

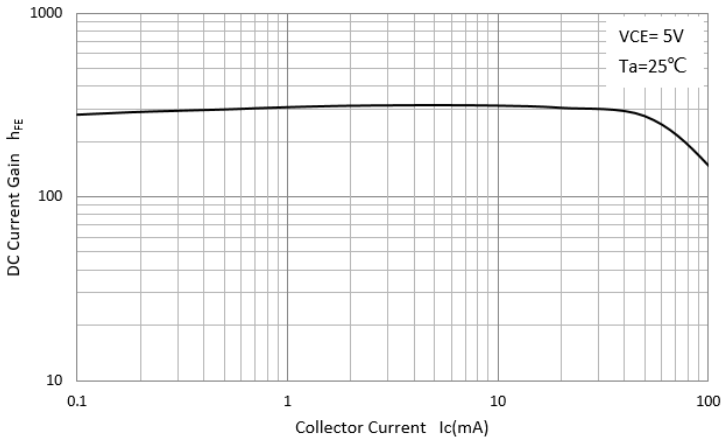


Collector-Emitter Saturation Voltage

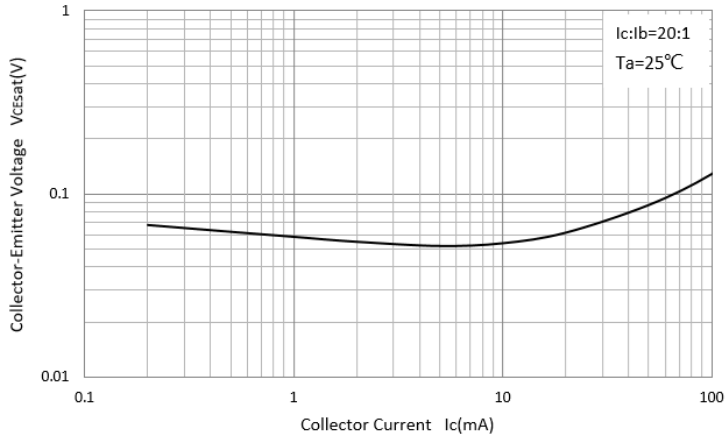


Base-Emitter Saturation Voltage

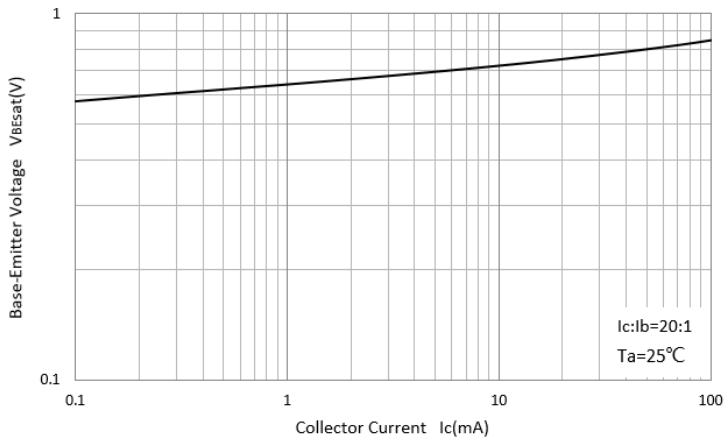


Base-Emitter On Voltage

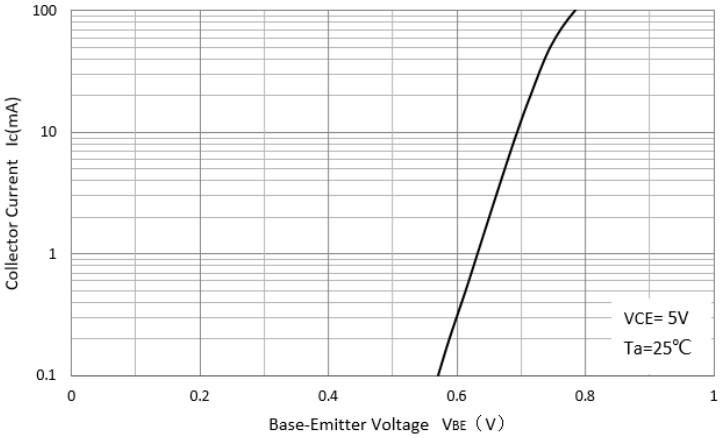


Cob/Cib-V_{CB}/V_{EB}

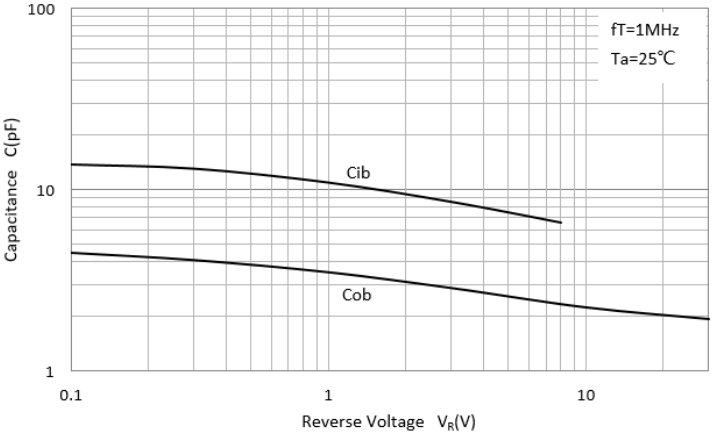


■Outline Dimensions

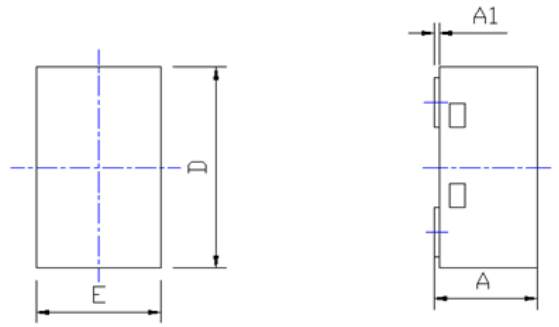

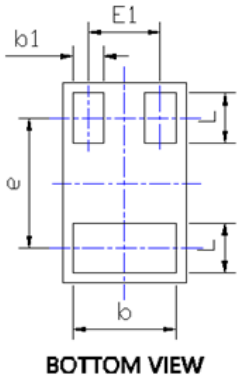

DIMENSIONS			
SYMBOL	Millimeter		
	MIN.	NOM.	MAX.
A	0.42	---	0.55
A1	0.025REF		
b	0.45	0.50	0.55
b1	0.10	0.15	0.20
D	0.95	1.00	1.05
E	0.55	0.60	0.65
E1	0.35BSC		
e	0.65BSC		
L	0.20	0.25	0.30

■ Soldering Footprint

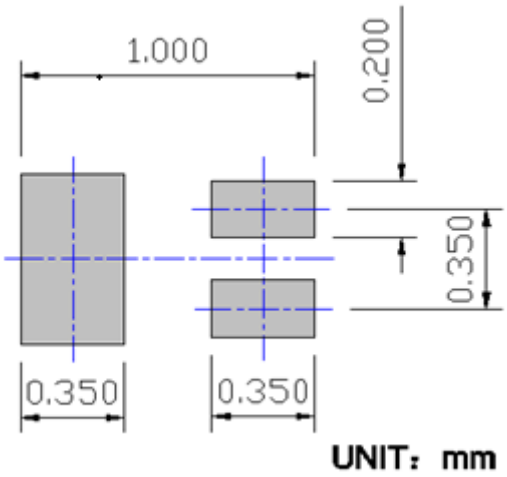

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.