
PNP General Purpose Amplifier

SOT-23



1、Base
2、Emitter
3、Collector


Features

- We declare that the material of product compliance with RoHS requirements and Halogen Free
- Surface mount package ideally suited for automatic insertion
- Moisture Sensitivity Level 1
- Low equivalent on-resisitance

Mechanical Data

- Package: SOT-23
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking: 591

■ Equivalent Circuit

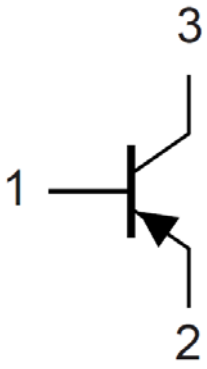

■ Maximum Ratings (Ta=25℃ Unless otherwise specified)


Item	Symbol	Unit	Conditions	Value
Collector-Base Voltage	V_{CBO}	V	IC=-100μA,IE=0	-80
Collector-Emitter Voltage	V_{CEO}	V	IC =-10mA,IB=0	-60
Emitter-Base Voltage	V_{EBO}	V	IE=-100μA,IC=0	-5
Collector Current	I_C	A		-1
Collector Power Dissipation	P_C	mW		300
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	℃/W		417
Operation Junction Temperature	T_J	℃		150
Storage Temperature	T_{STG}	℃		-55 to +150

■ Electrical Characteristics（Ta=25℃ Unless otherwise specified）


Item	Symbol	Unit	Conditions	Min	Type	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	IC=-100μA,IE=0	-80		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	IC =-10mA,IB=0	-60		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	IE=-100μA,IC=0	-5		
Collector-Base cut-off current	I_{CBO}	uA	V_{CB}=-60 V ,IE=0			-0.1
Emitter-Base cut-off current	I_{EBO}	uA	V_{EB}=-4V , IC=0			-0.1
DC current gain	$h_{FE}1$		VCE=-5V,IC=-1mA	100		
	$h_{FE}2$		VCE=-5V,IC=-500mA	100		300
	$h_{FE}3$		VCE=-5V,IC=-1A	80		
	$h_{FE}4$		VCE=-5V,IC=-2A	15		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	IC=-500mA,IB=-50mA			-0.3
		V	IC=-1A,IB=-100mA			-0.6
Base-emitter saturation voltage	$V_{BE(sat)}$	V	IC=-1A,IB=-100mA			-1.2
Base-emitter voltage	V_{BE}	V	VCE=-5V,IC=-1A			-1
Transition frequency	f_T	MHz	VCE=-10V, IC=-50mA,f=100MHz	150		
Collector-Base Output Capacitance	Cob	pF	V_{CB}=-10V ,IE=0, f=1MHz		10	

■ Electrical Characteristics (Typical)


Static Characteristic

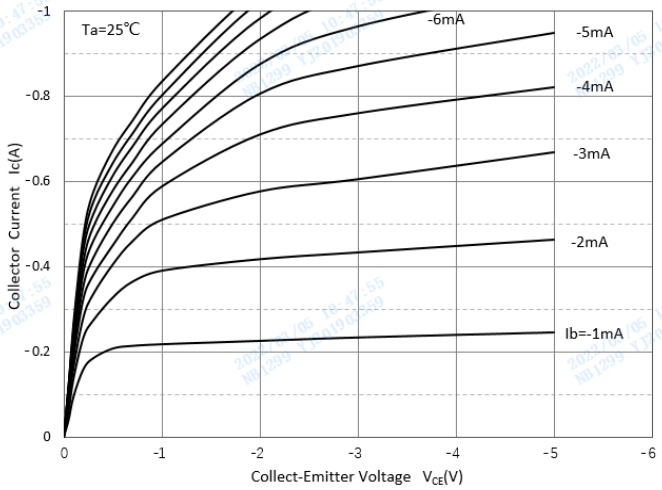


DC Current Gain

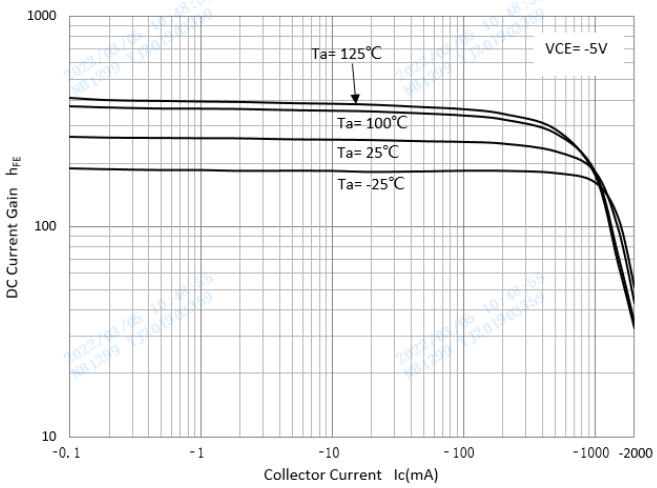


Collector-Emitter Saturation Voltage

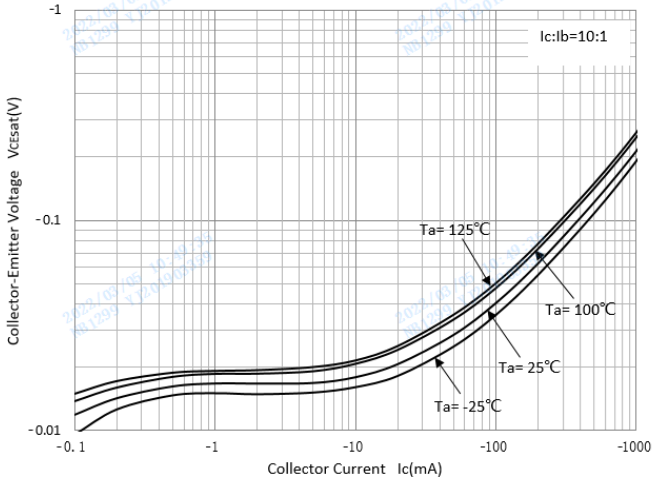


Base-Emitter Saturation Voltage

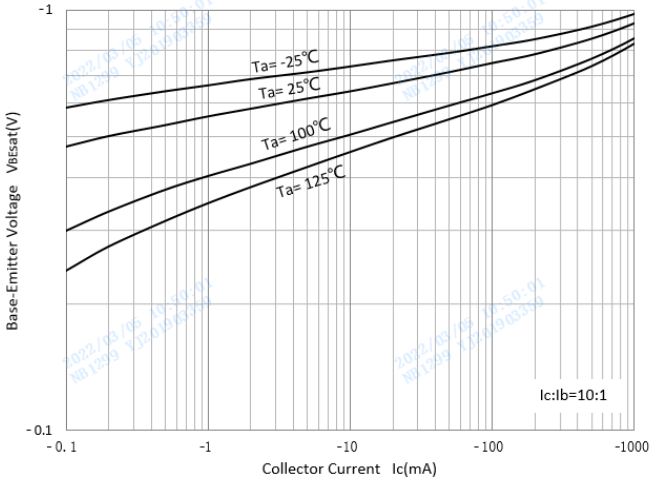


Base-Emitter On Voltage

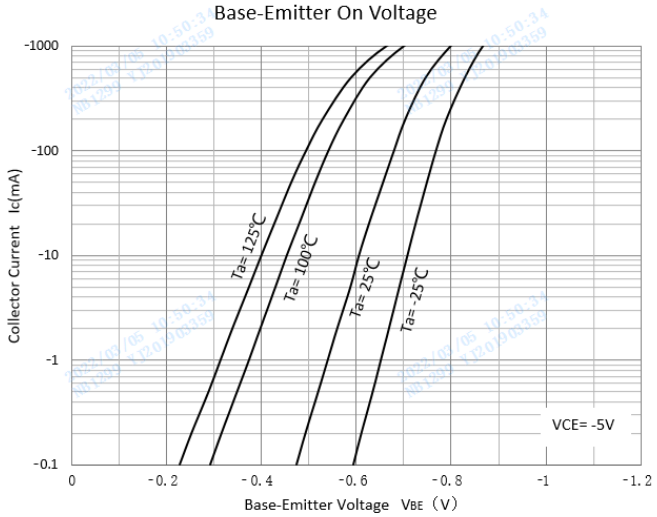

Cob/Cib-V_{CB}/V_{EB}

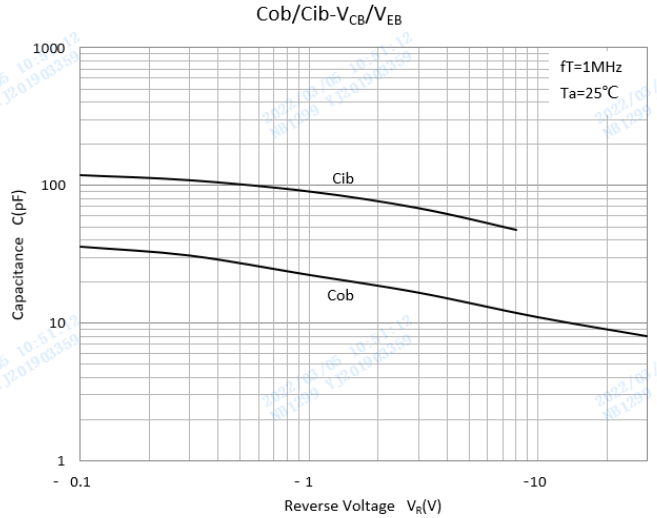


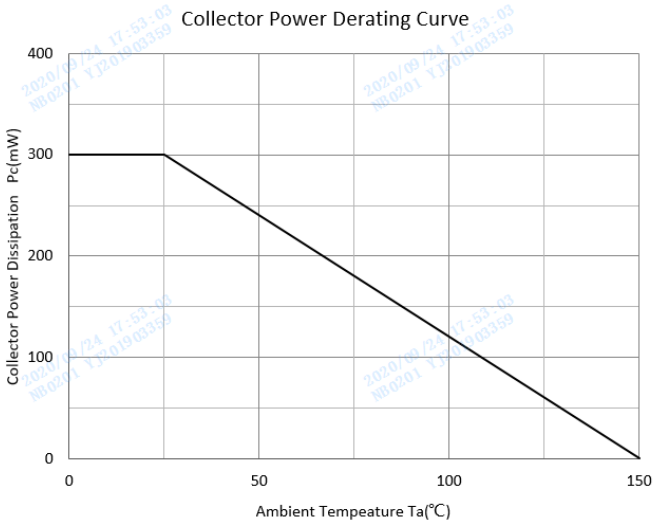

■ Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
FMMT591	F2	Approximate 0.008	3000	30000	120000	7” reel

■SOT-23 Package Outline Dimensions

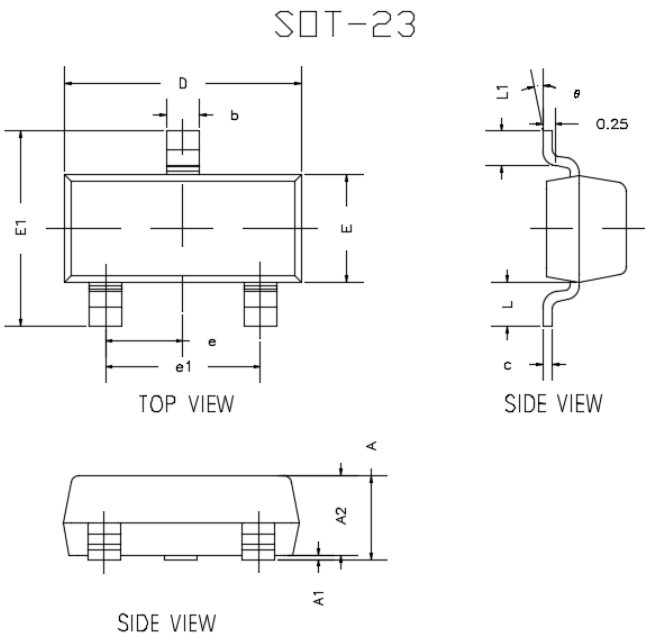

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MN	MAX
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.95TYP	
e1	0.071	0.079	1.800	2.000
L	0.022TYP		0.55TYP	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

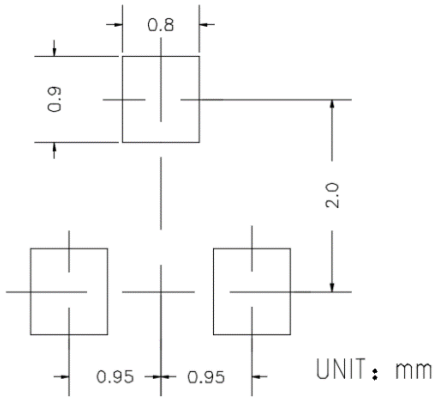

SUGGESTED SOLDER PAD LAYOUT

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.