
PNP General Purpose Amplifier

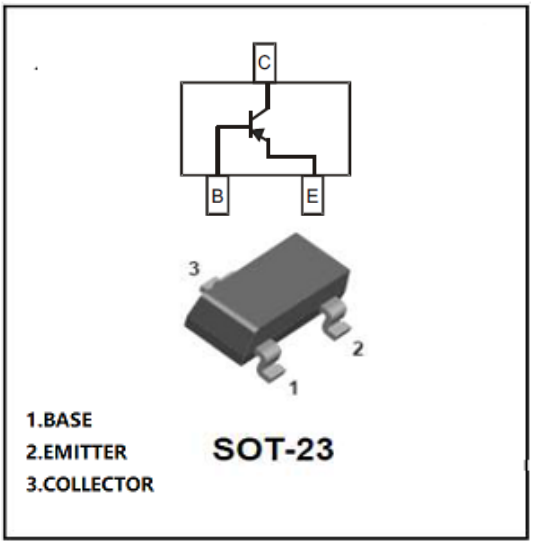

Features

- ●Epoxy meets UL-94 V-0 flammability rating
- ●Halogen free available upon request by adding suffix ”HF”
- ●Moisture Sensitivity Level 1
- ●High Conductance
- ●Surface Mount Package Ideally Suited for Automatic Insertion

Mechanical Data

- **Package**: SOT-23
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:**

MMBTA55	2H
MMBTA56	2GM

■Maximum Ratings (Ta=25℃ unless otherwise noted)

Item	Symbol	Rating	Unit
Collector-Base Voltage	V_{CBO} MMBTA55 MMBTA56	-60 -80	V
Collector-Emitter Voltage	V_{CEO} MMBTA55 MMBTA56	-60 -80	V
Emitter-Base Voltage	V_{EBO}	-4	V
Collector Current	I_C	-500	mA
Collector Power Dissipation	P_C	300	mW
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	417	℃/W
Operation Junction Temperature	T_j	-55 to +150	℃
Storage Temperature	T_{stg}	-55 to +150	℃

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

Item	Symbol	Unit	Conditions	Min	Max
Collector-emitter breakdown voltage	V_{CEO}	V	I_C =-1mA,I_B=0 MMBTA55 MMBTA56	 -60 -80	
Emitter-base breakdown voltage	V_{EBO}	V	I_E=-100μA,I_C=0	-4	
Collector-base cut-off current	I_{CBO}	μA	V_{CB}=-60V,I_E=0, MMBTA55 V_{CB}=-80V,I_E=0, MMBTA56		-0.1 -0.1
Collector-emitter cut-off current	I_{CES}	μA	V_{CE}=-60V, I_B=0V,		-0.1
DC current gain	h_{FE}		V_{CE}=-1V,I_C=-10mA	100	400
	h_{FE}		V_{CE}=-1V,I_C=-100mA	100	
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	I_C=-100mA,I_B=-10mA		-0.25
Base-emitter saturation voltage	$V_{BE(sat)*}$	V	I_C=-100mA, I_B=-10mA		-1.2


■Other Characteristics（T_a=25℃ Unless otherwise specified）


Item	Symbol	Unit	Conditions	Min	Max
Transition frequency	fT	MHz	V_{CE}=-1V,I_C=-100mA,f=100MHz	50	

■Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBTA55 MMBTA56	F2	Approximate 0.009	3000	30000	120000	7” reel

■Characteristics(Typical)

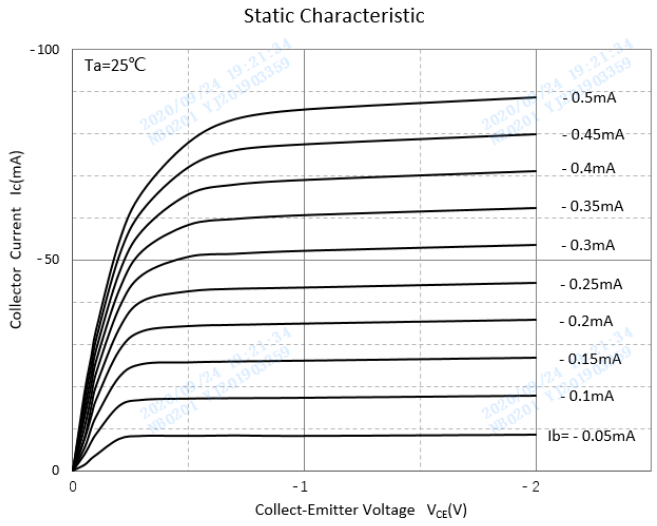


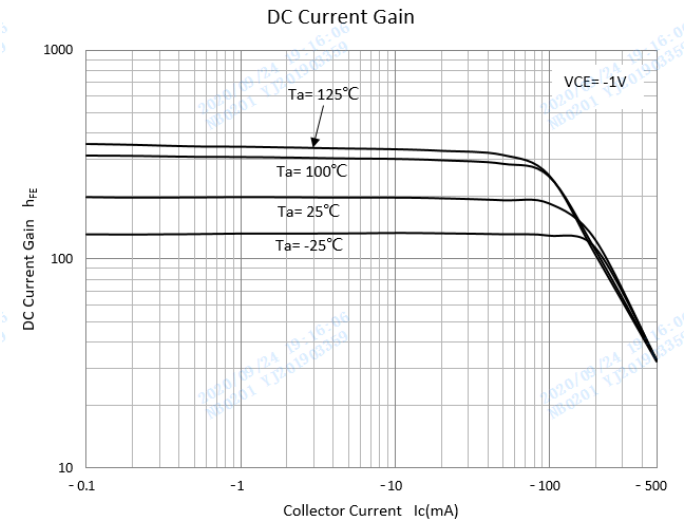


Collector-Emitter Saturation Voltage

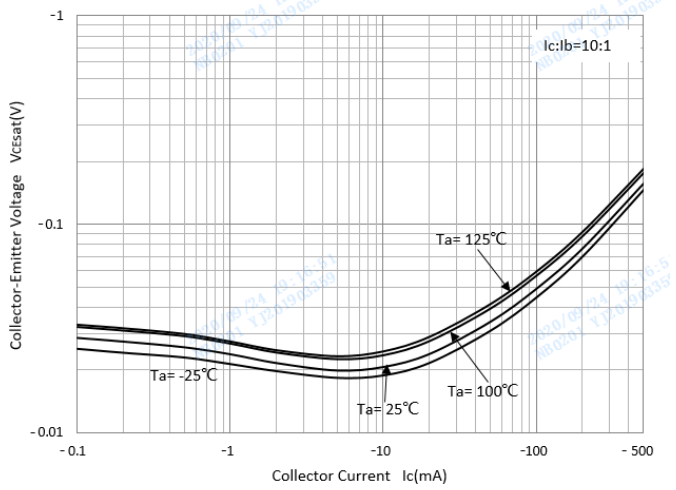


Base-Emitter Saturation Voltage

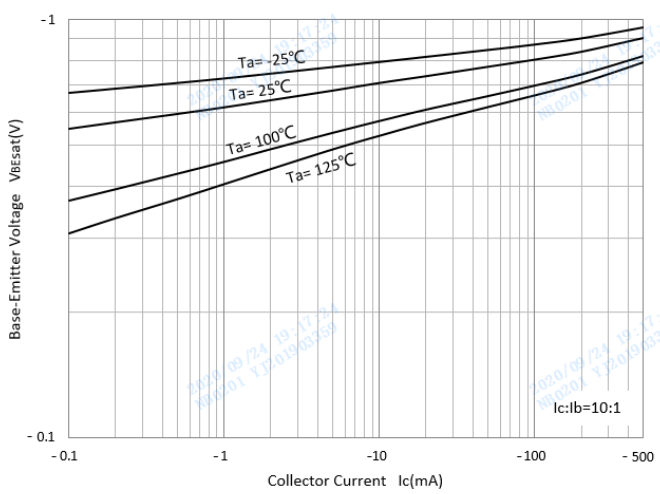


Base-Emitter On Voltage

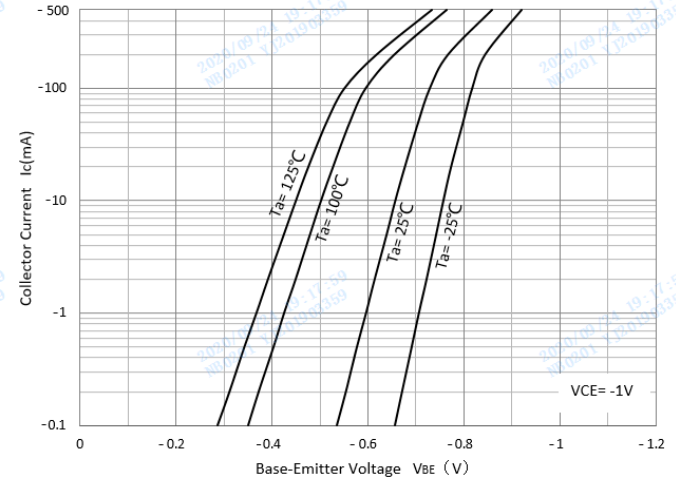


Cob/Cib-V_{CB}/V_{EB}

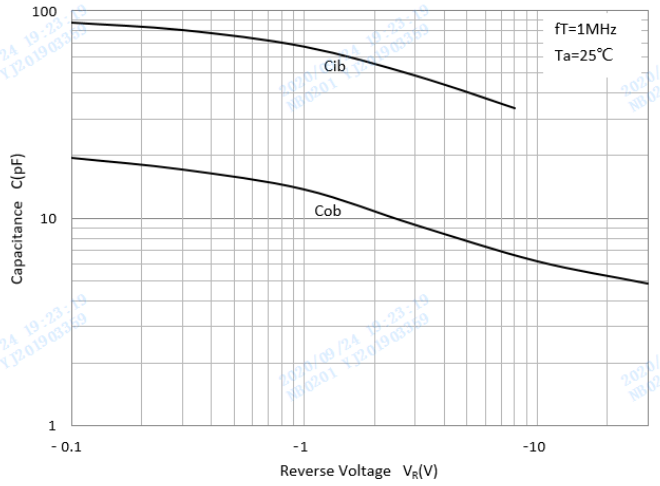

Collector Power Derating Curve

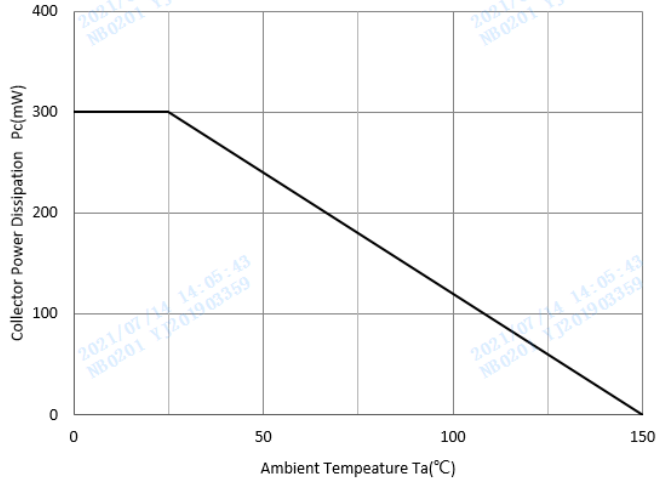


■SOT-23 Package Outline Dimensions

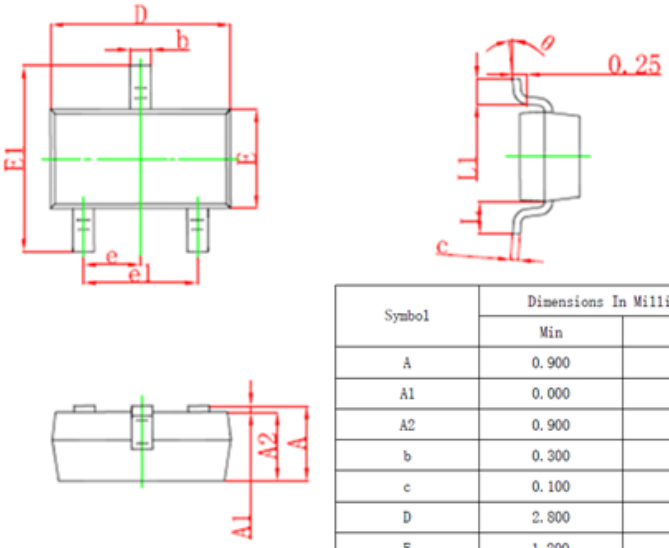

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

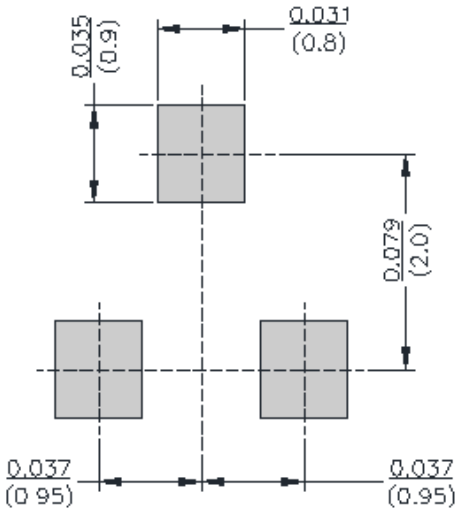

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.