NPN Transistor




Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1

Mechanical Data

- **Package**: SOT-223
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking**: 304NZB

■Equivalent circuit

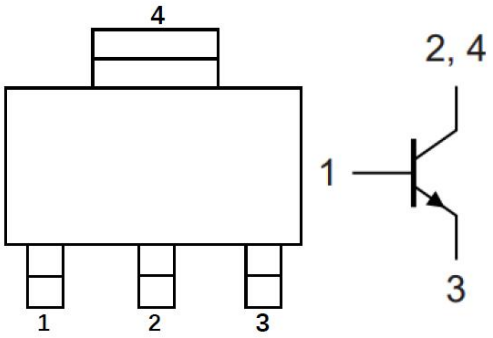

■Maximum Ratings (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage	V_{CEO}	V		60
Collector-Base Voltage	V_{CBO}	V		60
Emitter-Base Voltage	V_{EBO}	V		5
Collector Current	I_C	A		5.2
Peak Collector Current	I_{CM}	A	single pulse,t_P=1ms	10.4
Peak Base Current	I_{BM}	A	t_P=1ms	0.5
Power Dissipation(Note1)	P_D	W		1
Operation Junction Temperature	T_j	℃		-55 to +150
Storage Temperature	T_{stg}	℃		-55 to +150

■Electrical Characteristics (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-Base Breakdown Voltage	V_{CBO}	V	I_C=100uA,I_E=0	60		
Collector-Emitter Breakdown Voltage	V_{CEO*}	V	I_C =10mA,I_B=0	60		
Emitter-Base Breakdown Voltage	V_{EBO}	V	I_E=100μA,I_C=0	5		
Collector-Base Cut-Off Current	I_{CBO}	nA	V_{CB}=60V, I_E =0			100
Emitter-Base Cut-Off Current	I_{EBO}	nA	V_{EB}=5V, I_C =0			100
DC Current Gain	h_{FE}		V_{CE}=2V,I_C=0.5A	300		
	h_{FE}		V_{CE}=2V,I_C=1A	300		
	h_{FE}		V_{CE}=2V,I_C=2A	250		
	h_{FE}		V_{CE}=2V,I_C=4A	150		
	h_{FE}		V_{CE}=2V,I_C=6A	80		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	mV	I_C=0.5A,I_B=50mA			35
			I_C=1A,I_B=50mA			70
			I_C=1A,I_B=10mA			120
			I_C=2A,I_B=40mA			150
			I_C=4A,I_B=200mA			220
			I_C=4A,I_B=400mA			210
			I_C=4A,I_B=80mA			305
			I_C=5.2A,I_B=260mA			280
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	I_C=1A,I_B=100mA			0.9
			I_C=4A,I_B=400mA			1.05
Collector-Emitter Saturation Resistance	$R_{CE(sat)}$	mΩ	I_C=4A,I_B=200mA			55
Base-Emitter Turn-On Voltage	$V_{BE(ON)}$	V	V_{CE}=2V I_C=2A			0.85
Output Capacitance	Cob	pF	V_{CB}=10V, I_E=0, f=1MHz		70	
Transition Frequency	f_T	MHz	V_{CE}=10V,I_C=100mA,f=100MHz		140	

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J\text{-}A}$(1)	℃/W	125
Thermal resistance, junction-to-case	$R_{\theta J\text{-}C}$(1)	℃/W	40


Note：


（1）Thermal resistance from junction to ambient and from junction to case mounted on FR4 P.C.B. with 1mm^2 copper pad areas


■Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PBSS304NZB	F2	Approximate 0.11	2500	5000	25000	13” reel


■Characteristics (Typical)

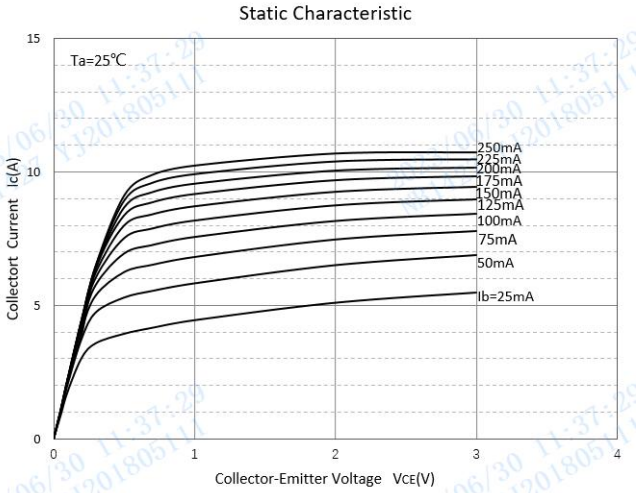


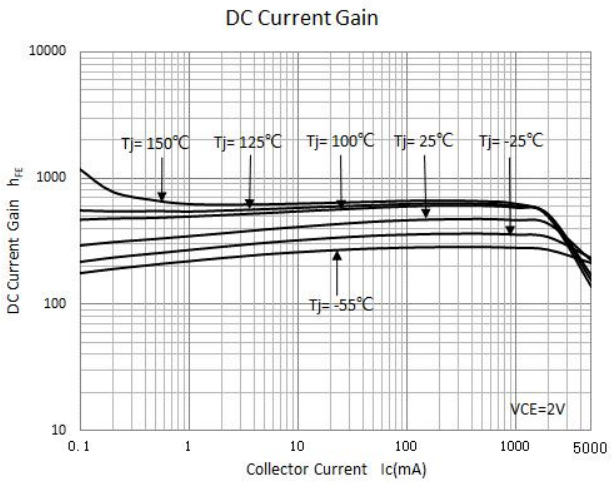


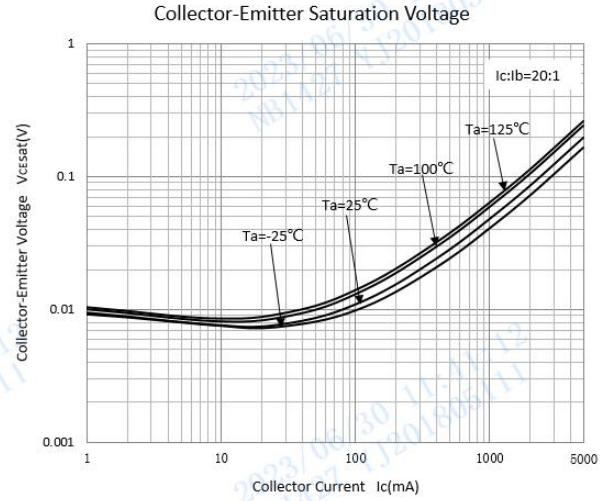


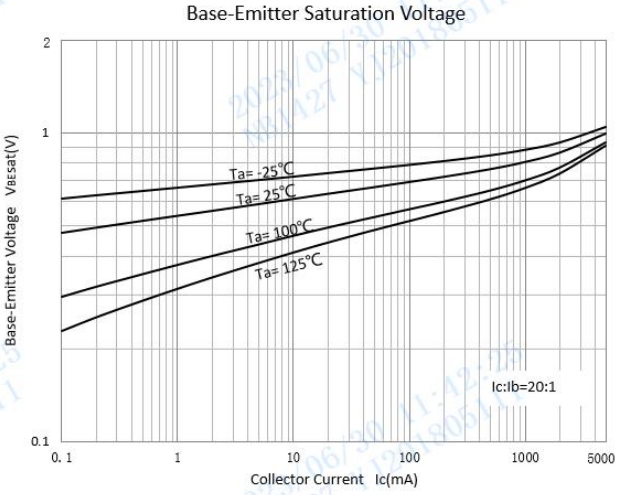

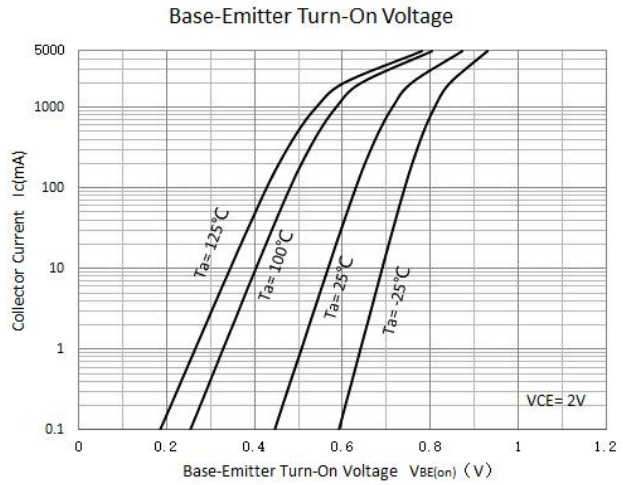


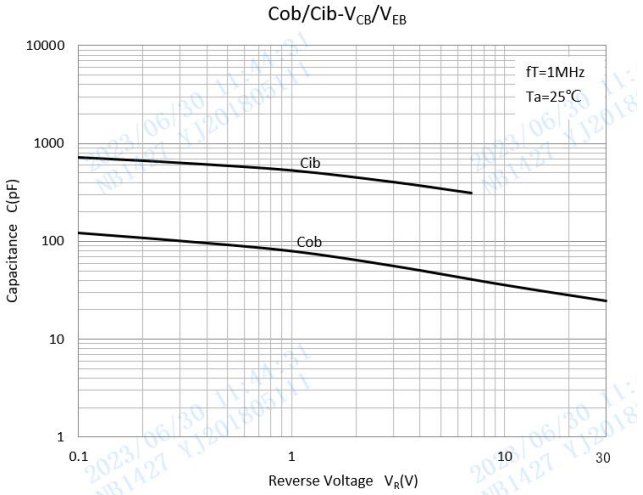

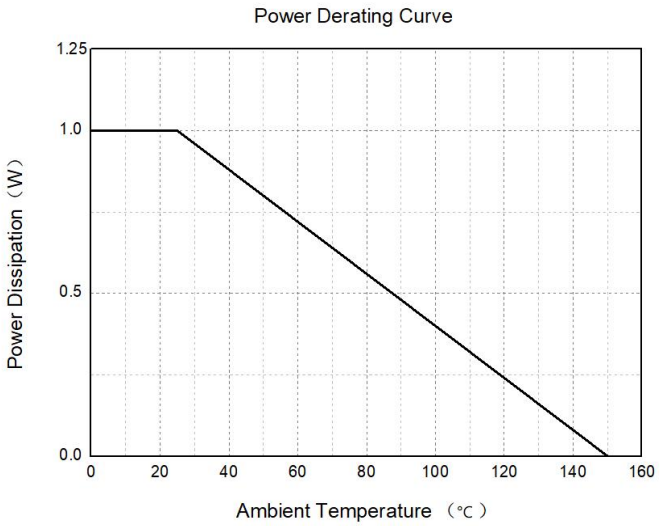

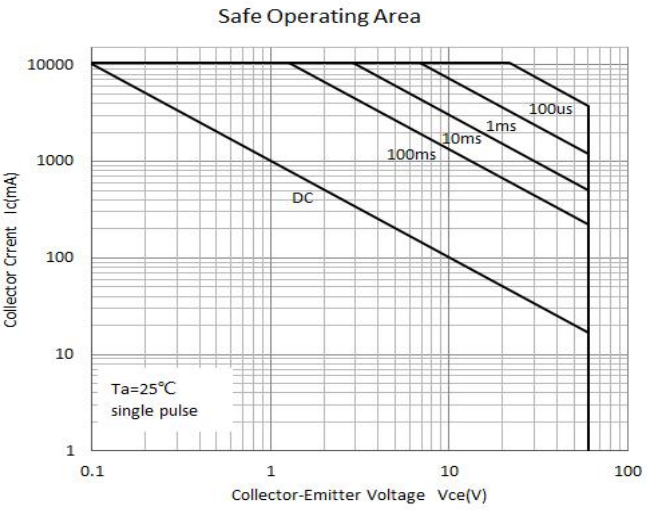


■SOT-223 Package Outline Dimensions

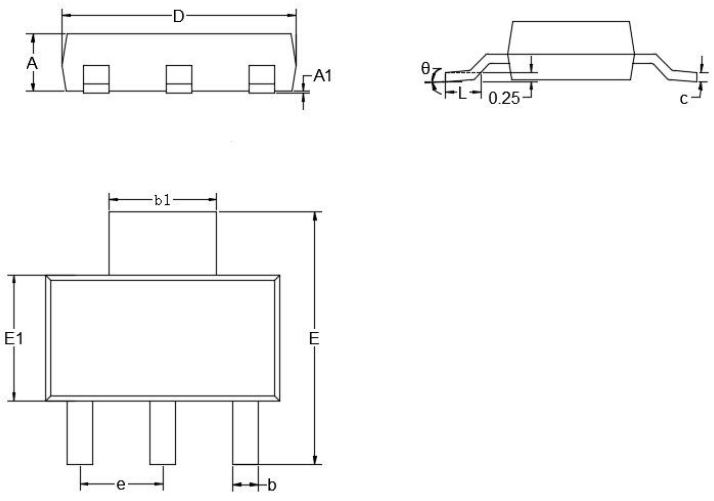

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MN	MAX
A	0.0591	0.0670	1.5000	1.7000
A1	0.0008	0.0039	0.0200	0.1000
b	0.0259	0.0330	0.6600	0.8400
b1	0.1140	0.1220	2.9000	3.1000
c	0.0090	0.0138	0.2300	0.3500
D	0.2480	0.2640	6.3000	6.7000
E	0.2637	0.2874	6.7000	7.3000
E1	0.1290	0.1460	3.3000	3.7000
e	0.0866	0.0945	2.2000	2.4000
L	0.0295	0.0492	0.7500	1.2500
θ	0°	10°	0°	10°

■SOT-223 Suggested Pad Layout

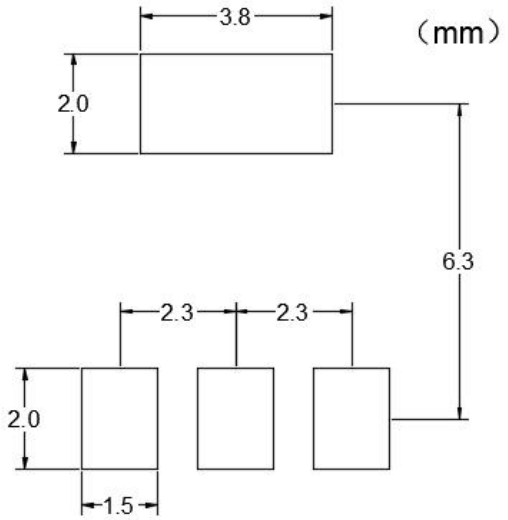

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.