
1N4001G THRU 1N4007G

General Purpose Rectifier





Features

- High efficiency
- High current capability
- High reliability
- High surge current capability
- Low power loss
- Glass passivated chip junction
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

Mechanical Data

- **Package**: DO-204AL(DO-41)

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant

- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:**Color band denotes cathode end

■Maximum Ratings (Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	1N4001G	1N4002G	1N4003G	1N4004G	1N4005G	1N4006G	1N4007G
Device marking code			1N4001G	1N4002G	1N4003 G	1N4004 G	1N4005G	1N4006G	1N4007G
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V	50	100	200	400	600	800	1000
Average Forward Current @60Hz sine wave, Resistance load, Ta =85℃	$I_{F(AV)}$	A	1.0						
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	30						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃			60						
Current squared time @1ms≤t8.3≤ms Tj=25℃，Rating of per diode	I^2t	A^2s	3.735						
Typical junction capacitance @Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	Cj	pF	6						
Storage Temperature	T_{stg}	℃	-55 ~ +150						
Junction Temperature	Tj	℃	-55 ~ +150						

■Electrical Characteristics（Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	1N4001G	1N4002G	1N4003G	1N4004G	1N4005G	1N4006G	1N4007G
Maximum instantaneous forward voltage drop per diode	V_F	V	I_{FM}=1.0A	1.1						
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	Tj =25℃	2.5						
			Tj =125℃	50						

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	1N4001G	1N4002G	1N4003G	1N4004G	1N4005G	1N4006G	1N4007G
Typical Thermal Resistance	$R_{\theta J-A}$	℃/W	60						

■Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
1N4001G~1N4007G	D1	Approximate 0.27	Approximate 5000	5000	50000	Tape
1N4001G~1N4007G	C1	Approximate 0.27	Approximate 1000	1000	50000	Bulk

■ Characteristics (Typical)

FIG.1: Io-Ta Curve

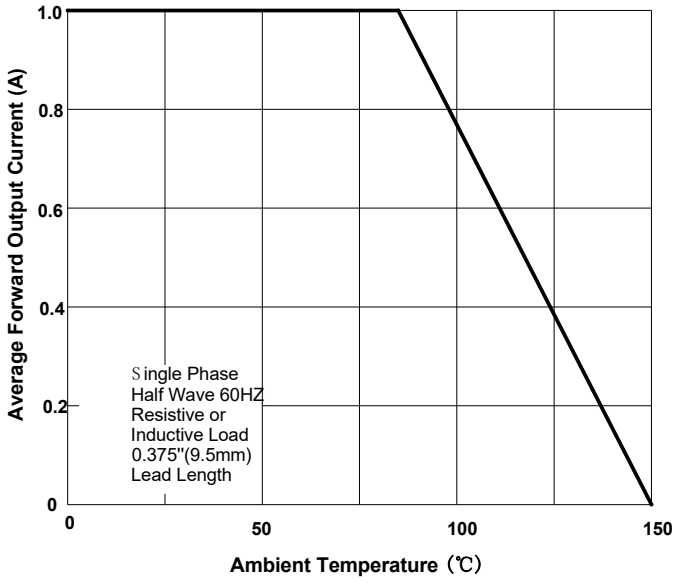


FIG.2: Forward Surge Current Capability

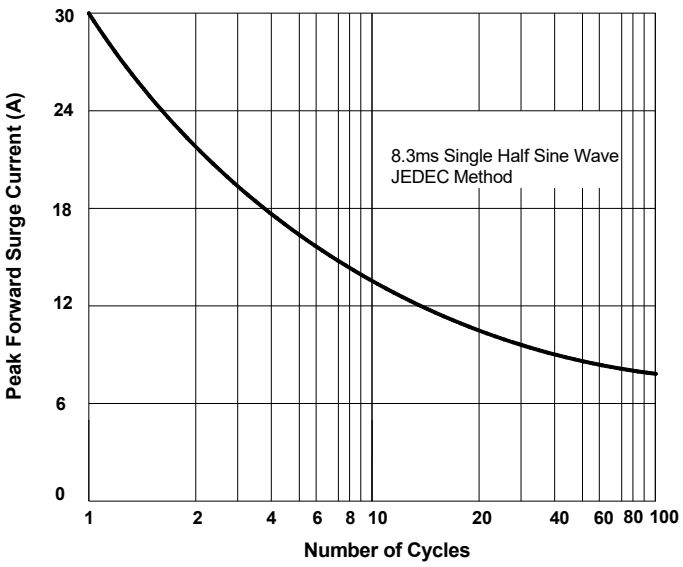


FIG.3: Forward Voltage



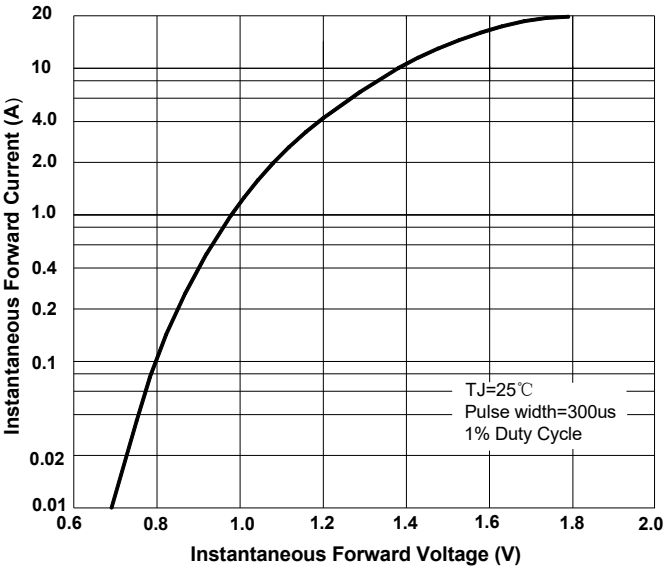


FIG.4: Typical Reverse Characteristics

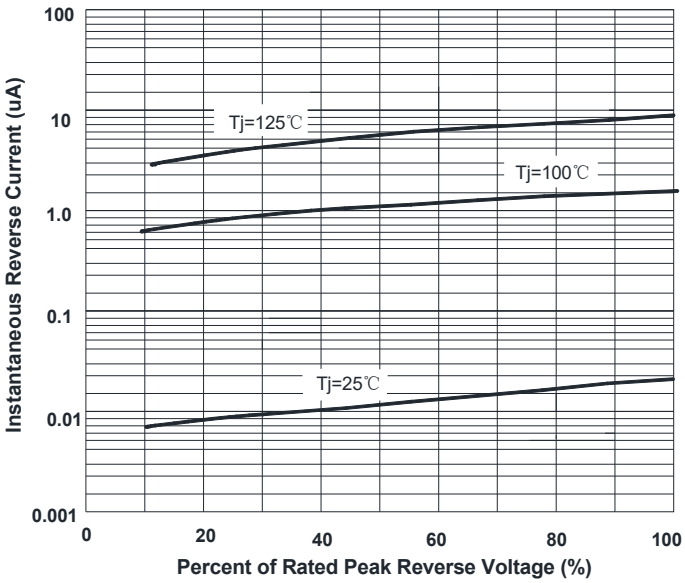

■ Outline Dimensions

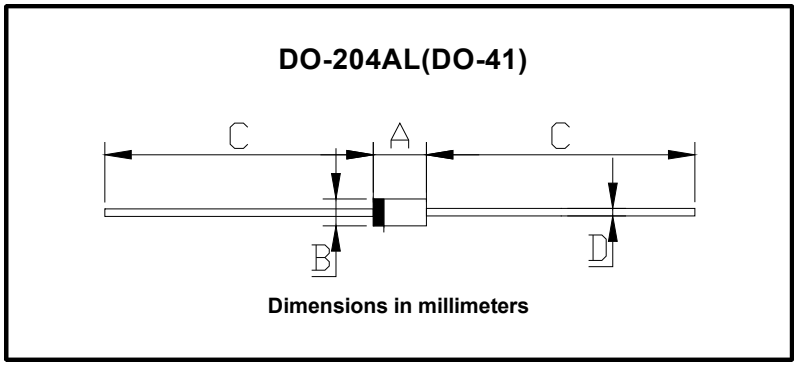

DO-204AL(DO-41)		
Dim	Min	Max
A	4.22	5.21
B	2.03	2.72
C	25.4	/
D	0.69	0.86

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.
Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.