Schottky Diodes





Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7s, per JESD 22-B106

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection

Mechanical Data

- **Package**: R-6
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity**: Color band denotes cathode end

■Maximum Ratings (Ta=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	20SQ045
Device Marking Code			20SQ045
Repetitive Peak Reverse Voltage	V_{RRM}	V	45
Average Rectified Output Current @60Hz sine wave, R-load, Ta=25℃	I_O	A	20
Surge(Non-repetitive)Forward Current @60Hz half sine wave, 1 cycle, Ta=25℃	I_{FSM}	A	315
Current Squared Time @1ms≤t≤8.3ms Tj=25℃	I^2t	A^2s	411
Storage Temperature	T_{stg}	℃	-55 ~+150
Junction Temperature IN DC Forward Mode-Forward Operations，without reverse bias, t ≤1 h (Fig. 1)①	T_j	℃	-55 ~+200

NOTE

① Meets the requirements of IEC 61215 Ed. 2 bypass diode thermal test.

■Electrical Characteristics（Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	20SQ045
Maximum instantaneous forward voltage drop per diode	V_{FM}	V	I_{FM}=20.0A	0.48
Maximum DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	mA	$V_{RM}=V_{RRM}$ T_a=25℃	0.1
	I_{RRM2}		$V_{RM}=V_{RRM}$ T_a=100℃	7.0
	I_{RRM3}		$V_{RM}=V_{RRM}$ T_a=125℃	20

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER		SYMBOL	UNIT	20SQ045
Thermal Resistance	Between junction and case	$R_{\theta J-C}$	℃/W	2.5

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
20SQ045	Approximate 1.96	500	10	5000	Tape
20SQ045	Approximate 1.96	1000	4	4000	Reel

■Characteristics (Typical)

FIG1:Io -Tc Curve

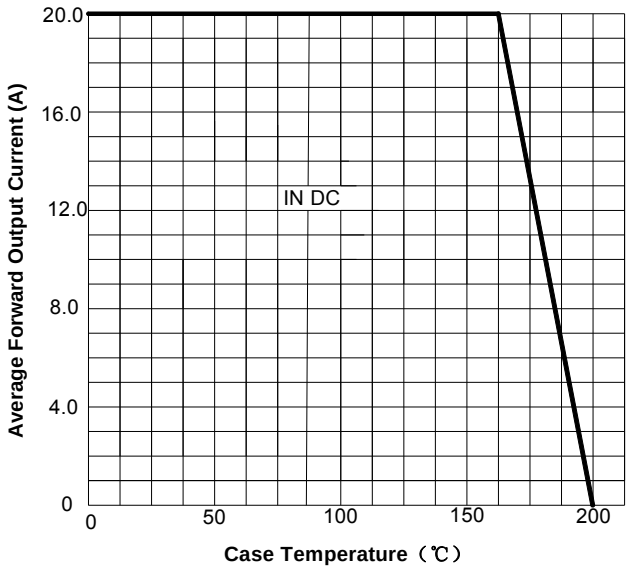


FIG2:Surge Forward Current Capability

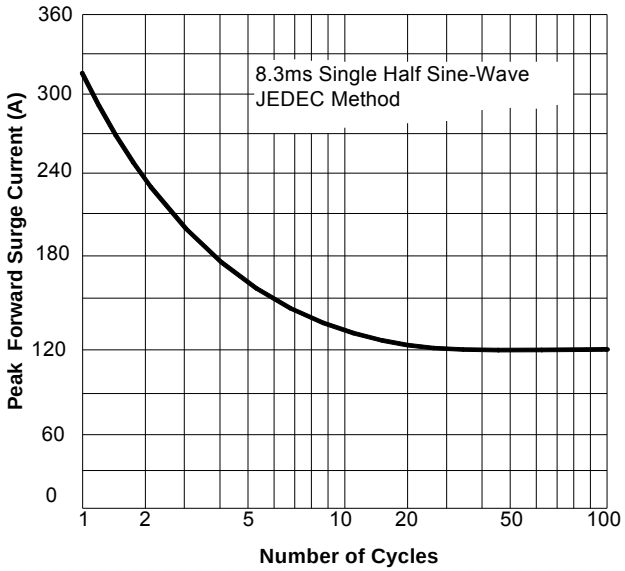


FIG3: Forward Voltage



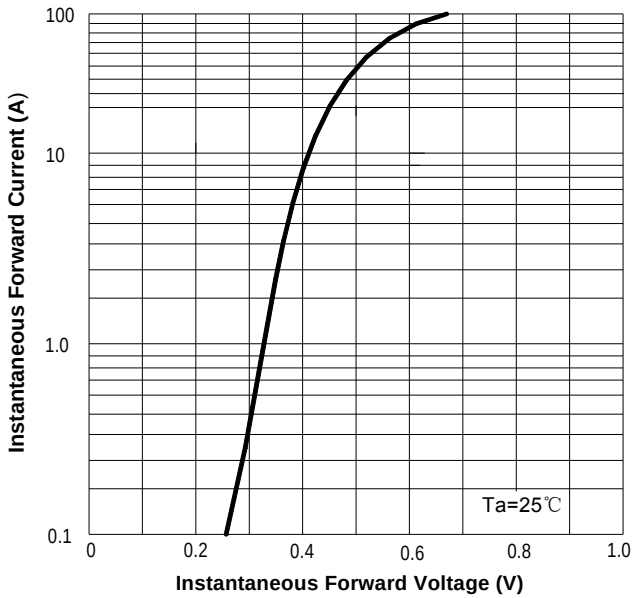


FIG4: Typical Reverse Characteristics

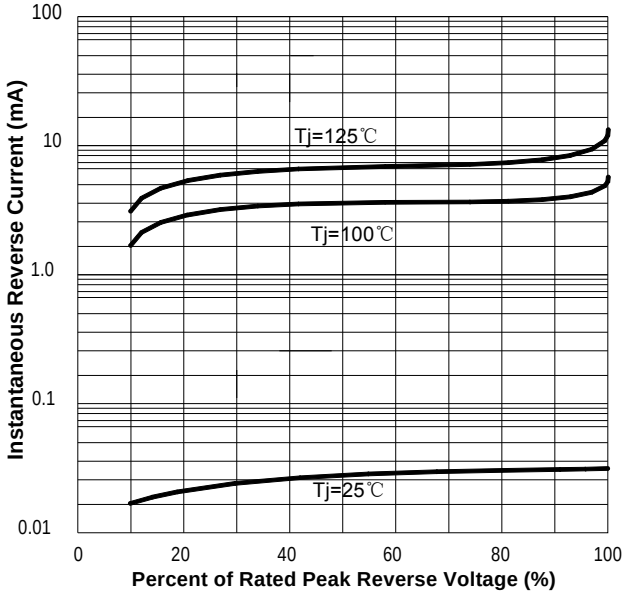

■Outline Dimensions

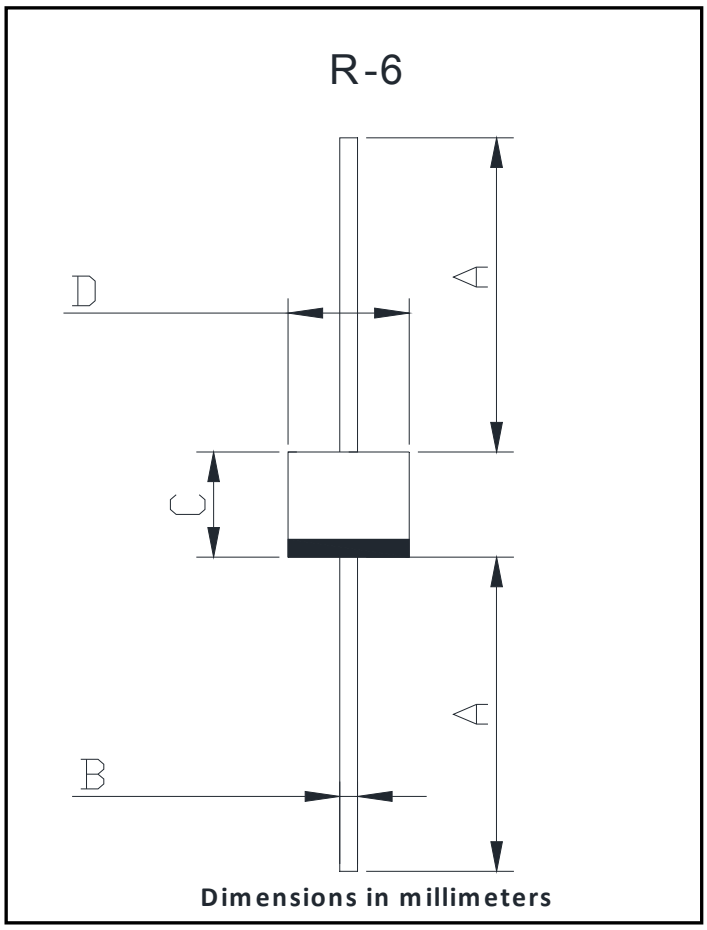

R-6		
Dim	Min	Max
A	25.4	/
B	1.2	1.3
C	8.6	9.1
D	8.6	9.1

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.