
General Purpose Rectifier Diodes

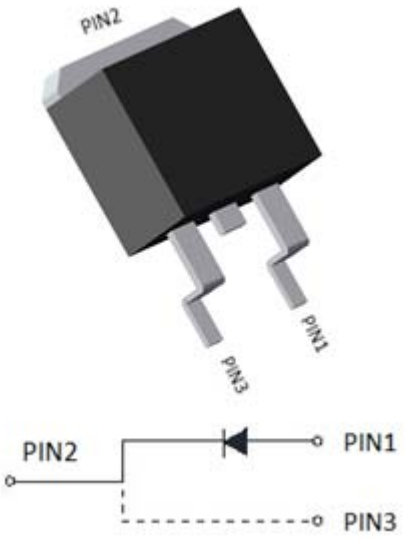

Features

- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 260 °C max. 10 s, per JESD 22-B106

Typical Application

- Input rectification

Mechanical Data

- **Package**: TO-263
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity**: As marked

■Maximum Ratings (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	30EPSB16
Device marking code			30EPSB16
Repetitive Peak Reverse Voltage per diode	V_{RRM}	V	1600
Average Rectified Output Current @60Hz half sine-wave, R-load, Tc (FIG.1)	I_o	A	30
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, Tj=25℃ per diode	IFSM	A	275
Current Squared Time @1ms≤t≤8.3ms Tj=25℃，rating of per diode	I^2t	A2s	313
Storage Temperature	Tstg	℃	-55 ~ +150
Junction Temperature	Tj	℃	-55 ~ +150

■Electrical Characteristics (Ta=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	30EPSB16
Maximum instantaneous forward voltage drop per diode	V_{FM}	V	I_{FM}=30.0A Tj=25℃	1.3
Maximum DC reverse current at rated DC blocking voltage per diode	I_{RRM}	uA	V_{RM}=V_{RRM} Tj=25℃	5
			V_{RM}=V_{RRM} Tj=125℃	500
Typical junction capacitance per diode	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	60

■Thermal Characteristics （Tj=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	30EPSB16
Thermal Resistance	$R_{\theta J-C}$	℃/W	2.0

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
30EPSB16	1.503	800	/	40000	Reel

■Characteristics (Typical)

b

FIG1:Io -Tc Curve

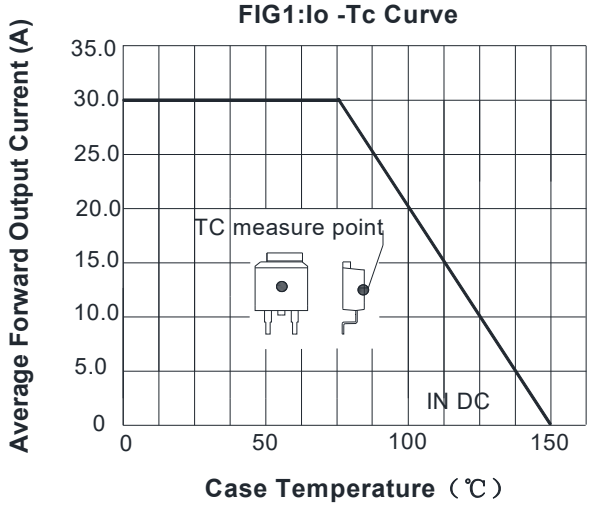


FIG2:Surge Forward Current Capability

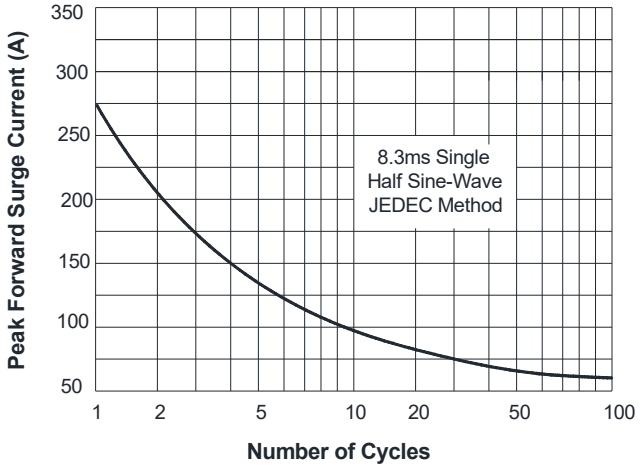


FIG3: Forward Voltage



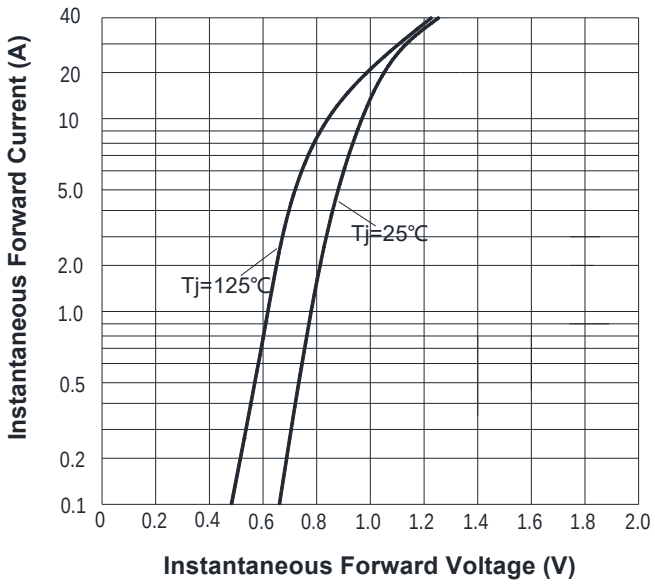


FIG.4: Typical Reverse Characteristics

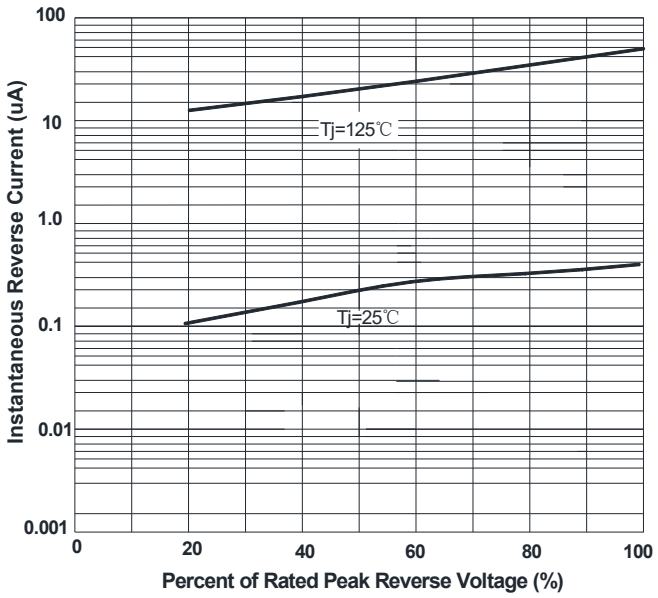


■Outline Dimensions

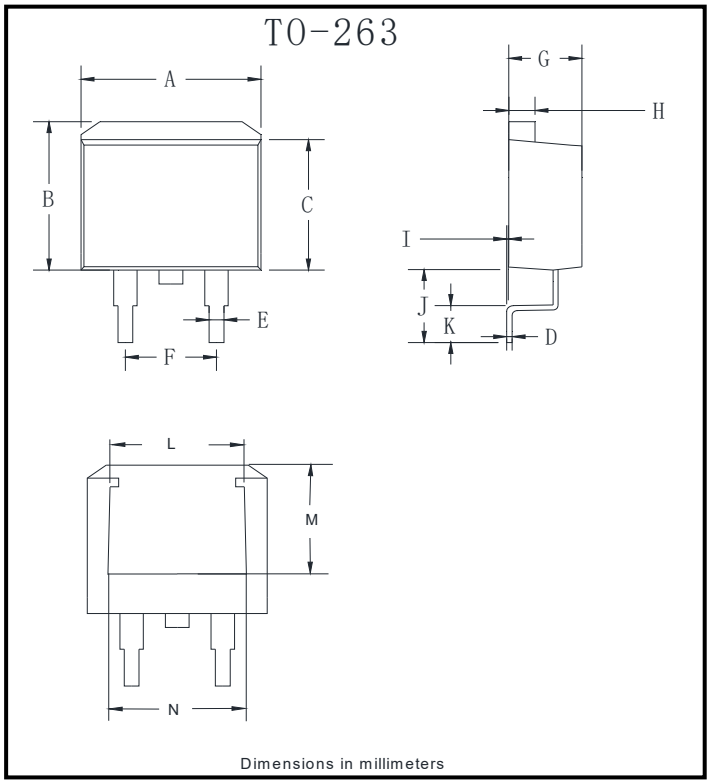

TO-263		
Dim	Min	Max
A	9.85	10.45
B	9.7	10.5
C	8.4	9.0
D	0.28	0.64
E	0.68	0.94
F	4.55	5.6
G	4.4	4.8
H	1.14	1.4
I	0	0.2
J	4.9	6.05
K	1.79	2.79
L	7.3	7.9
M	6.2	6.8
N	7.6	8.2

■ Suggested Pad Layout

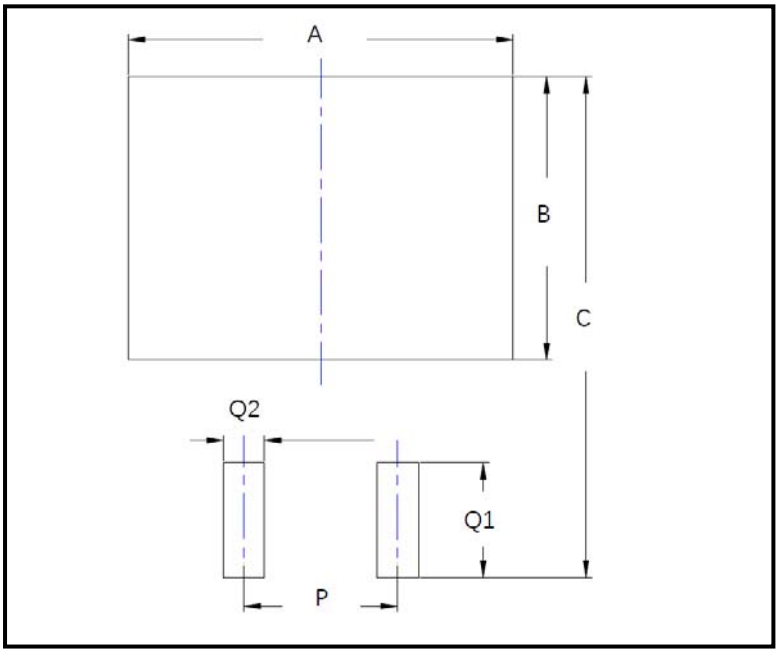

Dim	Millimeters
A	12.7
B	9.4
C	16.6
P	5.08
Q1	3.8
Q2	1.35

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.
Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.