


Bridge Rectifiers

GBPC-W



GBPC





Features

- Universal 3-way terminals：snap-on，wire wrap-around，or PCB mounting
- Glass passivated chip junction
- High surge current capability
- Low thermal resistance
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

General purpose use in AC/DC bridge full wave rectification for power supply, home appliances, office equipment, industrial automation applications.

Mechanical Data

- **Package**: GBPC、GBPC-W
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Suffix letter “W” added to indicate wire leads(e.g. GBPC3510W).

■Maximum Ratings (T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Device marking code			GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	100	200	400	600	800	1000	1200
Maximum RMS Voltage	V_{RMS}	V	70	140	280	420	560	700	840
Maximum DC blocking Voltage	V_{DC}	V	100	200	400	600	800	1000	1200
Average rectified output current @60Hz sine wave, R-load, T_C =60℃	I_O	A	35						
Forward Surge Current (Non-repetitive) @8.3ms, Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	450						
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃			900						
Current squared time @1ms≤t≤8.3ms Tj=25℃, Rating of per diode	I^2t	A^2S	841						
Storage temperature	Tstg	℃	-55 ~ +150						
Junction temperature	Tj	℃	-55 ~ +150						
Dielectric strength @ Terminals to case, AC 1 minute	V_{dis}	KV	2.5						
Mounting torque @Recommend torque：5kg·cm	Tor	kg·cm	8						

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Maximum instantaneous forward voltage drop per diode	V_F	V	I_{FM}=17.5A	1.1						
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	T_j =25℃	5						
			T_j =125℃	100						
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	145						

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER		SYMBOL	UNIT	GBPC3501	GBPC3502	GBPC3504	GBPC3506	GBPC3508	GBPC3510	GBPC3512
Thermal Resistance	Between junction and case, With heatsink	$R_{\theta J-C}$	℃/W	1.35						

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT (g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
GBPC3501 ~ GBPC3512	A1	Approximate 13.8	50	50	500	Paper Box
GBPC3501W ~ GBPC3512W	A1	Approximate 13	50	50	500	Paper Box

■ Characteristics (Typical)

FIG1:Io-Tc Curve

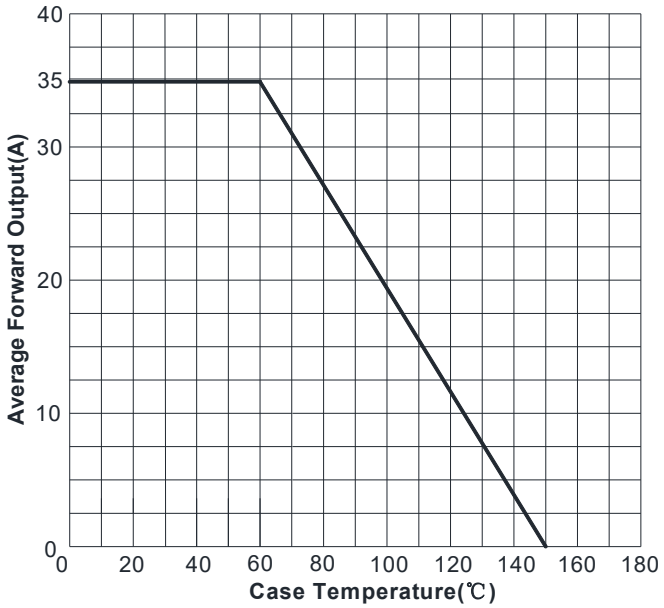


FIG2:Surge Forward Current Capability

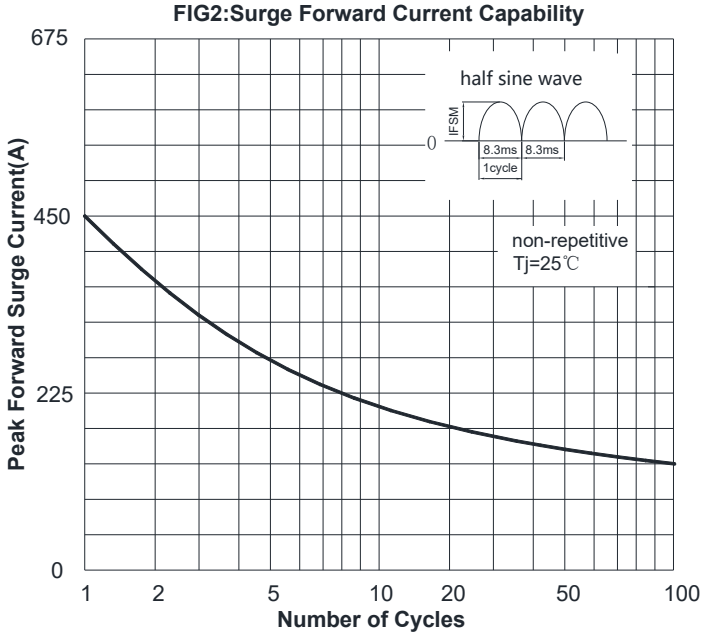


FIG3: Typical Forward Voltage



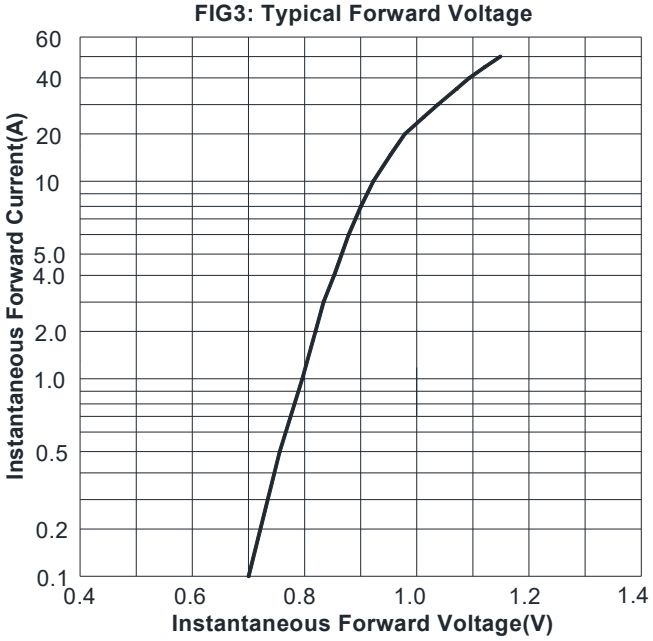


FIG4:Typical Reverse Characteristics

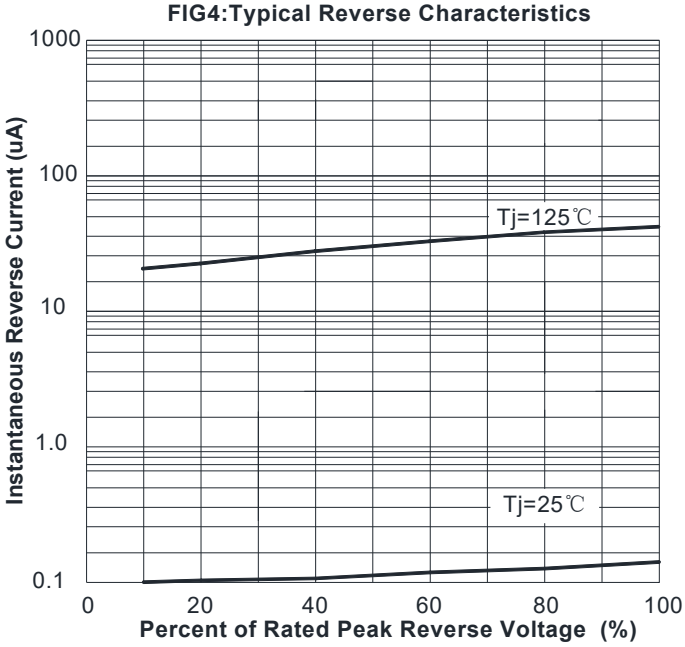

■ Outline Dimensions

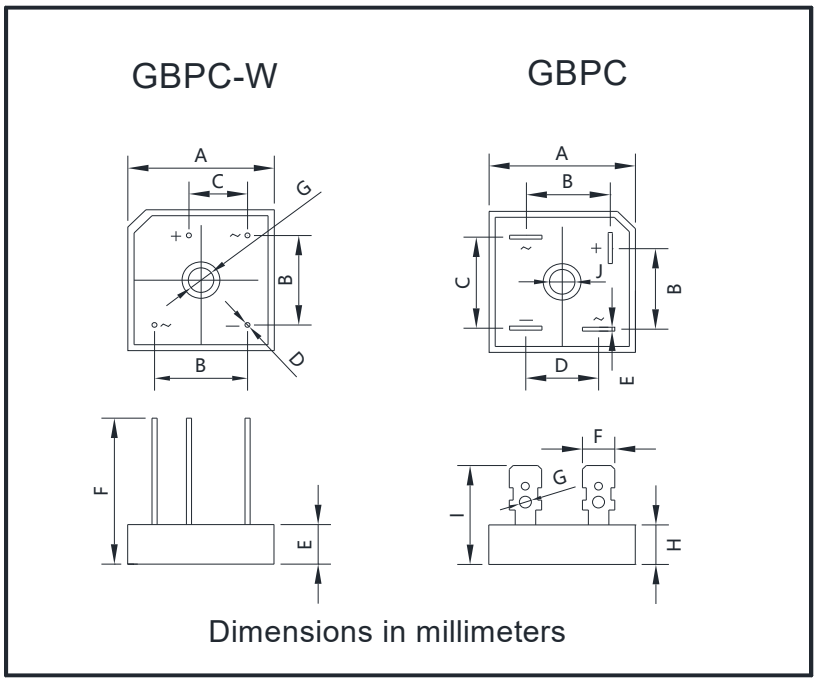

GBPC-W		
Dim	**Min**	**Max**
A	28.2	28.8
B	17.1	19.1
C	10.4	12.4
D	0.95	1.05
E	7.6	8.2
F	30	/
G	4.5	5.5

GBPC		
Dim	**Min**	**Max**
A	28.2	28.8
B	15.3	17.3
C	17.1	19.1
D	13.2	15.2
E	0.75	0.85
F	6.2	6.4
G	2.4	2.6
H	7.6	8.2
I	19	/
J	4.5	5.5

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.