
Surface Mount General Purpose Rectifier

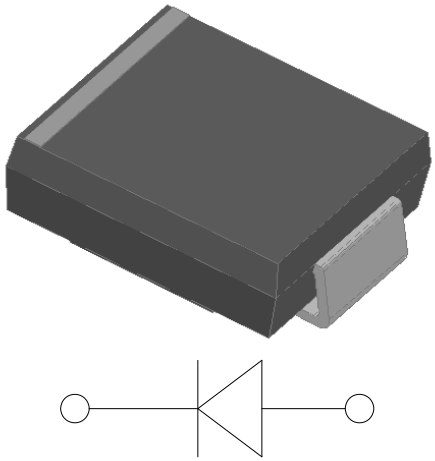

Features

- High efficiency
- High current capability
- High reliability
- High surge current capability
- Low power loss
- Solder dip 260 °C max. 10 s, per JESD 22-B106

Mechanical Data

- **Package**: DO-214AB (SMC)

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant

- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:**Color band denotes cathode end

■Maximum Ratings (Ta=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GS5Z
Device marking code			GS5Z
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	2000
Maximum RMS Voltage	V_{RMS}	V	1400
Maximum DC Blocking Voltage	V_{DC}	V	2000
Average Rectified Output Current @60Hz sine wave, Resistance load, Tc (FIG.1)	I_O	A	5.0
Surge(non-repetitive) forward current @60Hz half-sine wave,1 cycle, Ta=25℃	I_{FSM}	A	200
Surge(non-repetitive) forward current @1ms half-sine wave,1 cycle, Ta=25℃			350
Current Squared Time @1ms≤t<8.3ms Ta=25℃	I^2t	A^2s	166
Storage Temperature	Tstg	℃	-55 ~ +150
Junction Temperature	Tj	℃	-55 ~ +150

■Electrical Characteristics (Ta=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	GS5Z
Maximum instantaneous forward voltage drop per diode	V_F	V	I_{FM}=5.0A	1.1
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	Ta=25℃	5
			Ta=125℃	100
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C.	35

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	GS5Z
Typical Thermal Resistance	$R_{\theta J-A}$	℃/W	30[1)]
	$R_{\theta J-L}$		22[1)]
	$R_{\theta J-C}$		10[1)]

Note(1)
Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

■ Characteristics(Typical)

FIG.1: Io-TC Curve

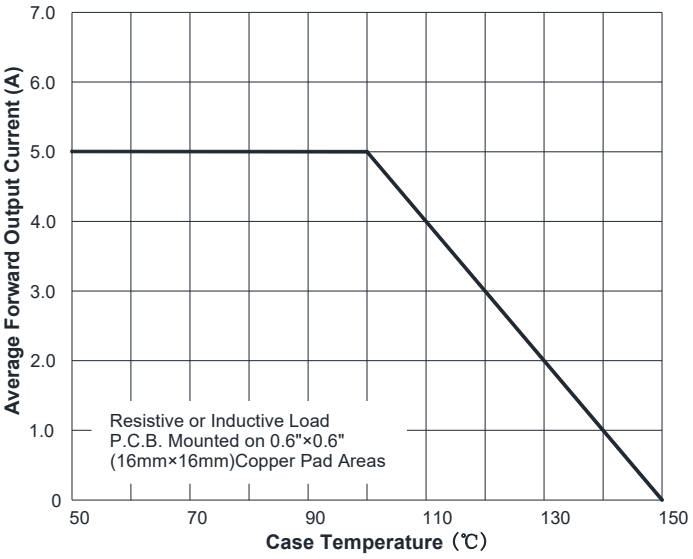


FIG.2: Forward Surge Currrent Capability

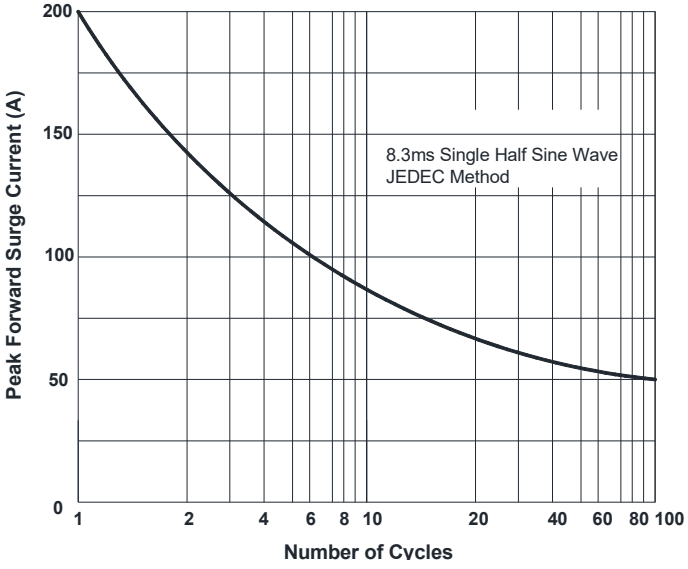


FIG.3: Typical Forward Voltage



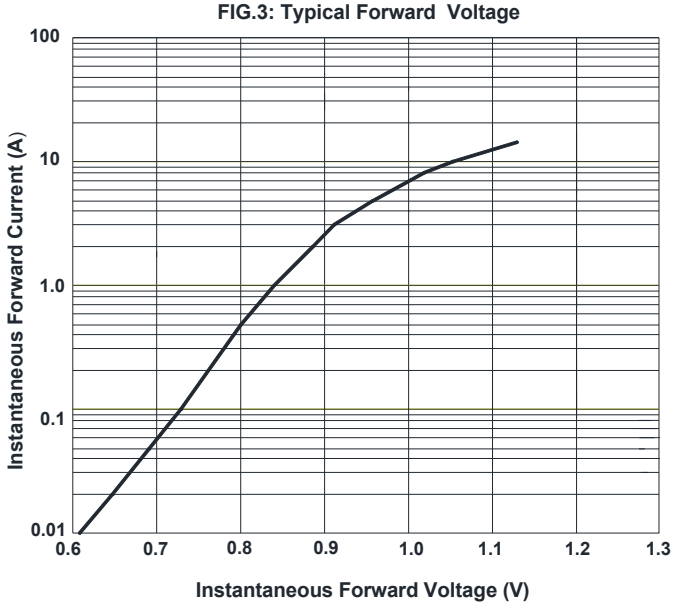


FIG.4: Typical Reverse Characteristics

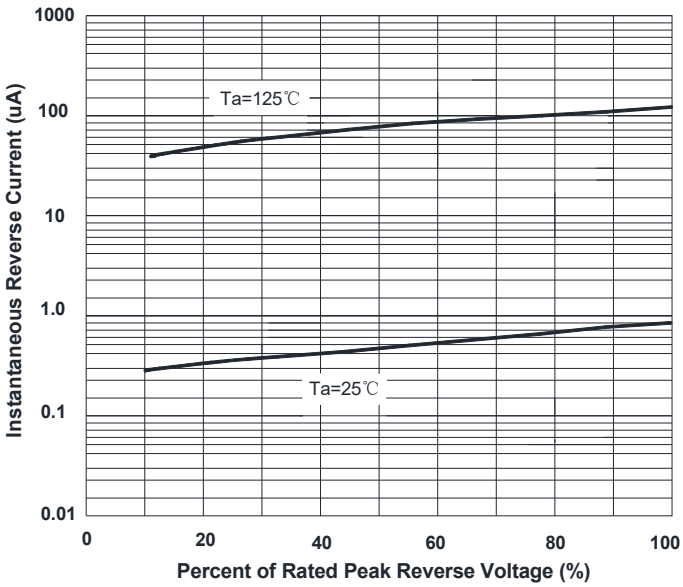


■ Outline Dimensions

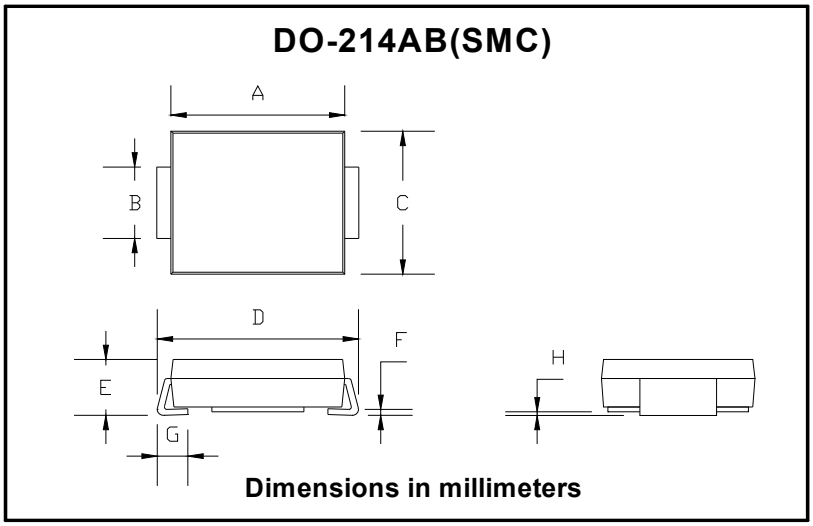

DO-214AB (SMC)		
Dim	Min	Max
A	6.60	7.11
B	2.85	3.27
C	5.59	6.22
D	7.75	8.13
E	1.99	2.61
F	0.15	0.31
G	0.76	1.52
H	0.10	0.20

■ Suggested pad layout

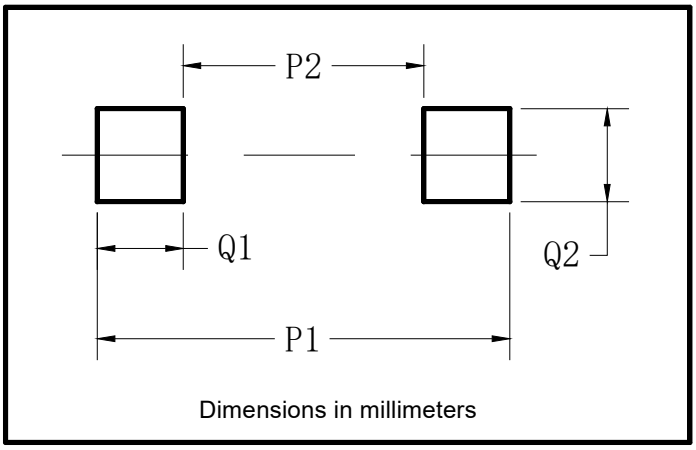

Dim	Typ
P1	9.9
P2	3.84
Q1	3.03
Q2	3.82

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.
Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.