

Surface Mount Rectifier Diode

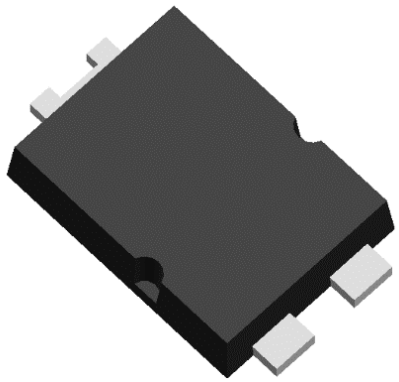

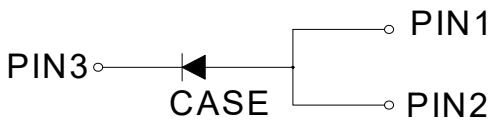

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in general purpose rectification of power supplies, inverters, converters, and freewheeling diodes for consumer, and telecommunication.

Mechanical Data

- **Package**: TO-277
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity**: Color band denotes the cathode end

■Maximum Ratings (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MGS8M
Device marking code			MGS8M
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	1000
Maximum RMS Voltage	V_{RMS}	V	700
Maximum DC blocking Voltage	V_{DC}	V	1000
Average Rectified Output Current @60Hz sine wave, Resistance load, Tc (FIG.1)	I_O	A	8.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	230
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃			460
Current squared time @1ms≤t≤8.3ms Tj=25℃	I^2t	A^2s	219
Typical Junction capacitance @4V,1MHz	Cj	pF	54
Storage Temperature	T_{stg}	℃	-55 ~ +150
Junction Temperature	Tj	℃	-55 ~ +150

■Electrical Characteristics (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Instantaneous forward voltage drop per diode	V_{FM}	V	Tj=25℃	I_{FM}=8.0A	-	0.94	1.10
			Tj=125℃		-	0.84	0.92
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	uA	Tj=25℃	$V_{RM}=V_{RRM}$	-	-	5
	I_{RRM2}		Tj=125℃		-	-	500

■Thermal Characteristics (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MGS8M
Typical Thermal resistance	$R_{\theta J-A}$(1)	℃/W	90
	$R_{\theta J-C}$(1)		6

■ Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MGS8M	F1	Approximate 0.0821	5000	/	80000	13” reel

■ Characteristics (Typical)

FIG.1: Io-Tc Curve

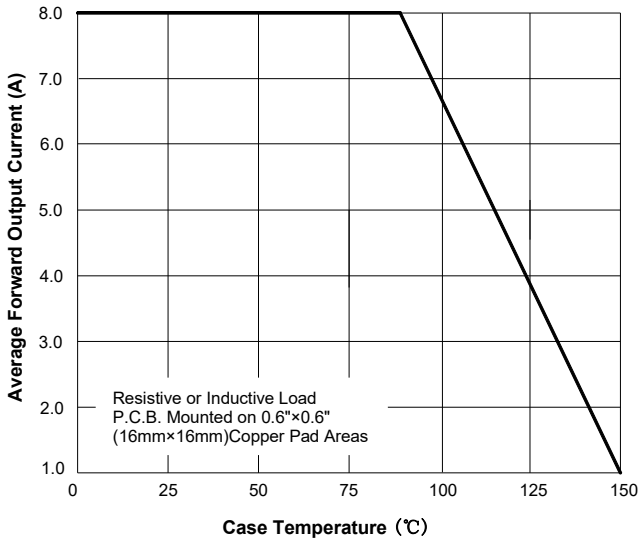


FIG2:Surge Forward Current Capability

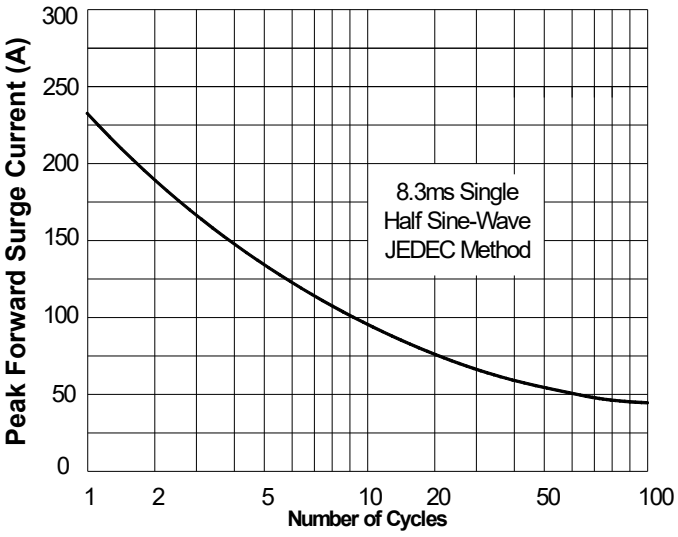


FIG.3: Typ.Forward Voltage



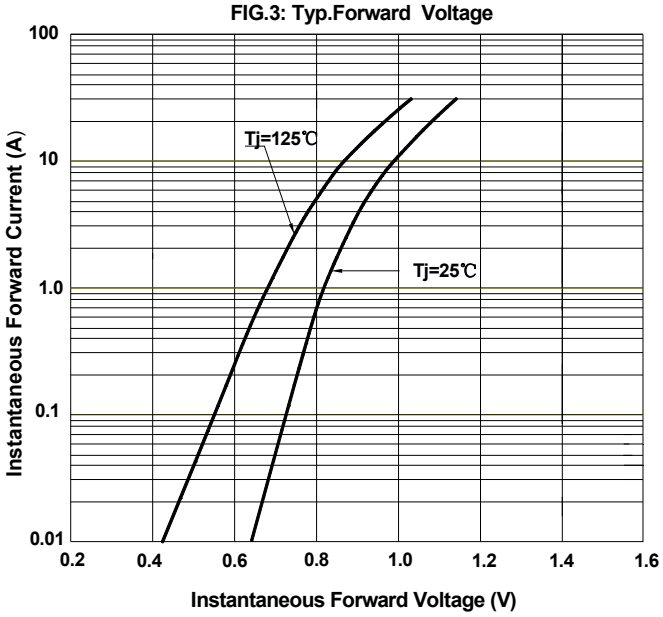


FIG.4: Typical Reverse Characteristics

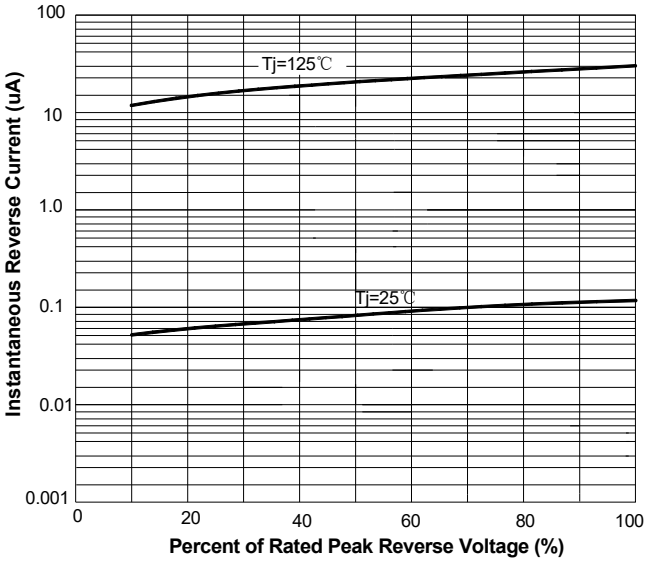


■ Outline Dimensions

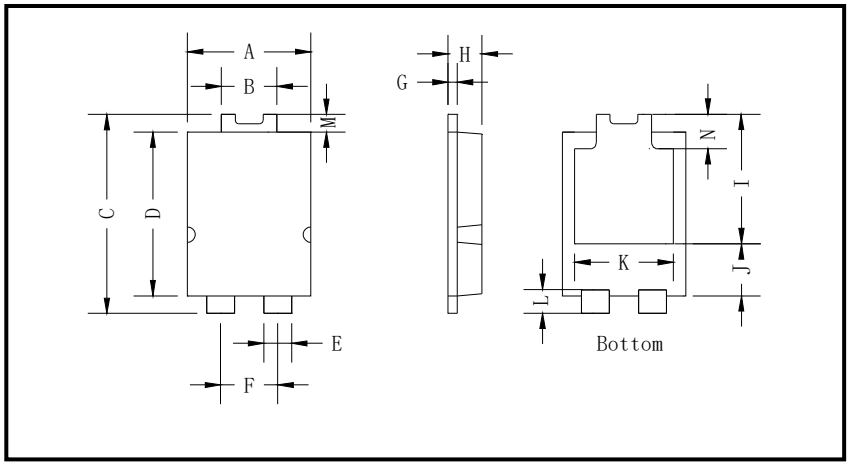

DIM	mm	
	MIN.	MAX.
A	3.90	4.10
B	1.70	1.90
C	6.40	6.60
D	5.30	5.50
E	0.80	1.00
F	1.85 ref.	
G	0.35	0.45
H	1.10	1.20
I	4.10	4.50
J	1.50	1.90
K	2.90	3.40
L	0.55	0.75
M	0.50 ref.	
N	1.15 ref.	

■ Suggested pad layout

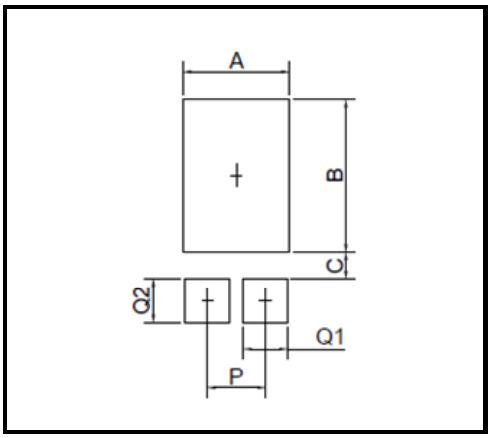

DIM	MIN.(mm)
A	3.36
B	4.86
C	0.85
P	1.84
Q1	1.40
Q2	1.40

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.
Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.