

Surface Mount Ultrafast Rectifier Diode

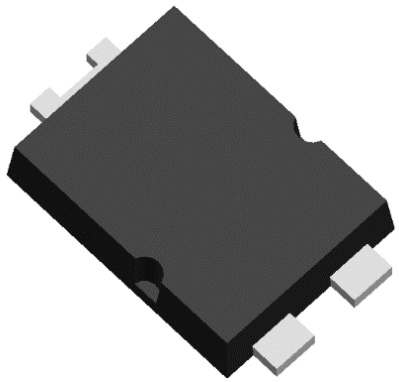

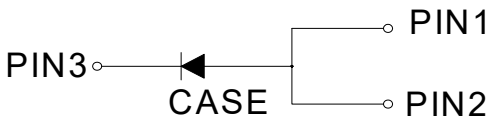

Features

- Ultrafast reverse recovery time
- Low leakage current
- Low switching losses, high efficiency
- High forward surge capability
- Solder dip 260 °C max. 10 s, per JESD 22-B106

Typical Applications

For use in high frequency rectification and freewheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

Mechanical Data

- **Package**: TO-277
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity**: Color band denotes the cathode end

■Maximum Ratings (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR5AU60
Device marking code			MUR5AU60
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	600
Maximum RMS Voltage	V_{RMS}	V	424
Maximum DC blocking Voltage	V_{DC}	V	600
Average Rectified Output Current @60Hz sine wave, Resistance load, Tc (FIG.1)	I_O	A	5.0
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	120
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃			240
Current squared time @1ms≤t≤8.3ms Tj=25℃	I^2t	A^2s	60
Typical Junction capacitance @4V,1MHz	Cj	pF	40
Storage Temperature	T_{stg}	℃	-55 ~ +150
Junction Temperature	Tj	℃	-55 ~ +150

■Electrical Characteristics (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Instantaneous forward voltage drop per diode	V_{FM}	V	Tj=25℃	I_{FM}=5.0A	-	1.18	1.50
			Tj=125℃		-	0.94	1.25
Reverse Recovery Time	T_{RR}	ns	Tj=25℃	I_F=0.5A,I_R=1.0A, I_{rr}=0.25A	-	-	50
			Tj=25℃	I_F=5A di/dt=-200A/us V_{RM}=400V	-	44	-
			Tj=125℃		-	73	-
Peak recovery current	I_{RRM}	A	Tj=25℃		-	7.05	-
			Tj=125℃		-	11.33	-
Reverse recovery charge	Qrr	nC	Tj=25℃		-	155	-
			Tj=125℃		-	410	-
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	uA	Tj=25℃	V_{RM}=V_{RRM}	-	-	5
	I_{RRM2}		Tj=125℃		-	-	50
Non-repetitive avalanche energy	EAS	mJ	Tj=25℃	I_R=1.4A L=15 mH	120		

■Thermal Characteristics (Tj=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MUR5AU60
Typical Thermal resistance	$R_{\theta J-A}$(1)	℃/W	50
	$R_{\theta J-C}$(1)		8

■ Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MUR5AU60	F1	Approximate 0.0821	5000	/	80000	13” reel

■ Characteristics (Typical)

FIG.1: Io-Tc Curve

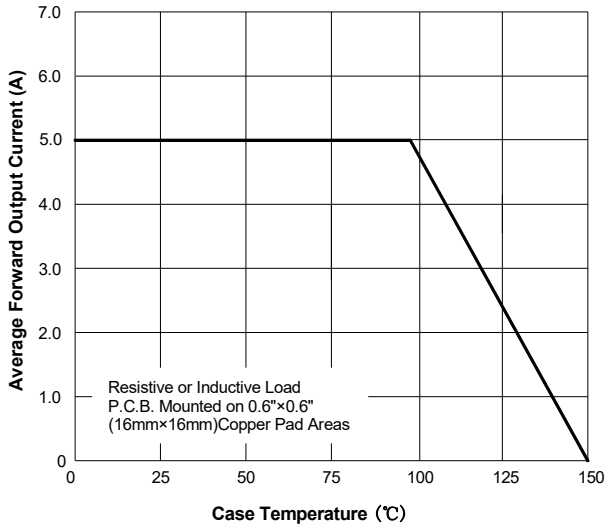


FIG.2: Forward Surge Current Capability

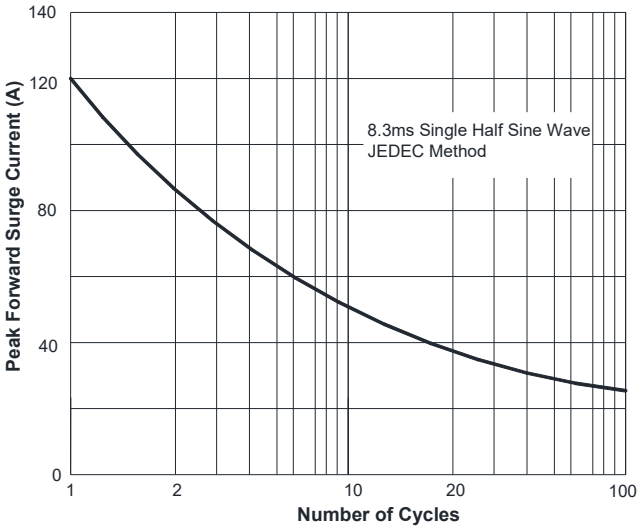


FIG.3: Forward Voltage



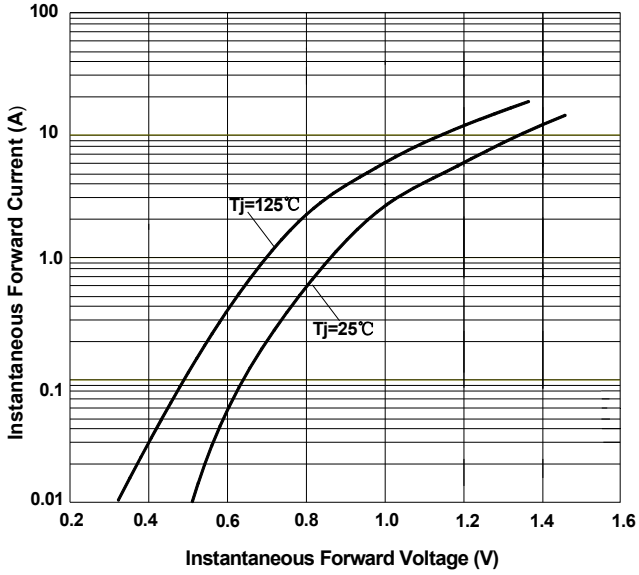


FIG.4: Typical Reverse Characteristics

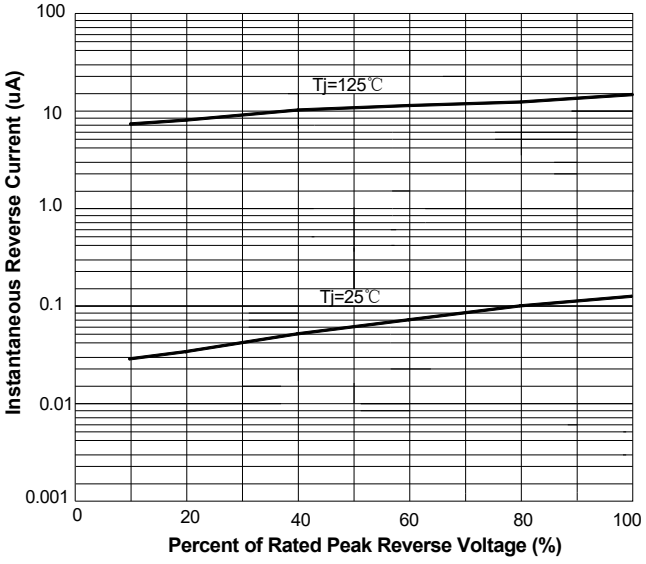


■ Outline Dimensions

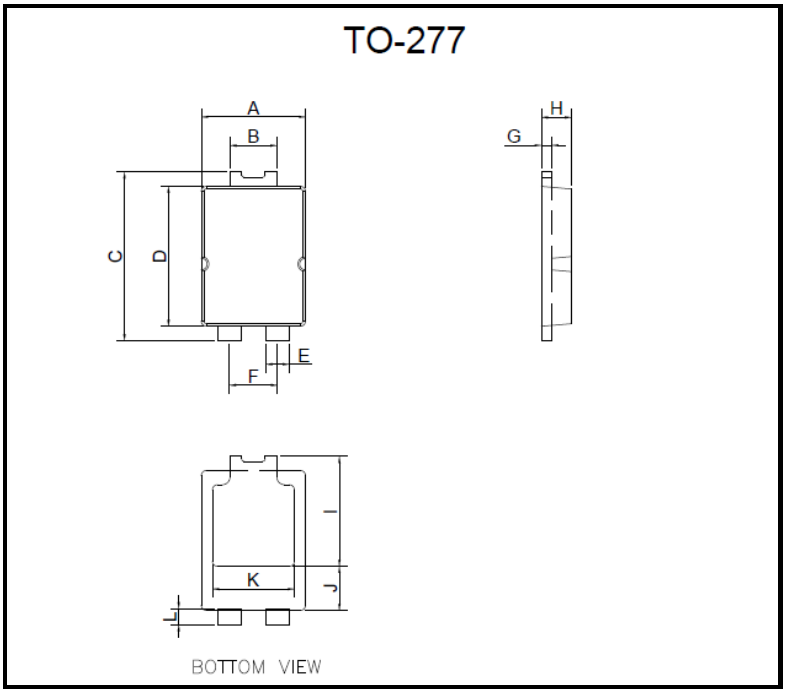

DIM	mm	
	MIN.	MAX.
A	3.90	4.10
B	1.70	1.90
C	6.40	6.60
D	5.30	5.50
E	0.80	1.00
F	1.85 REF	
G	0.35	0.45
H	1.10	1.20
I	4.10	4.50
J	1.50	1.90
K	2.90	3.40
L	0.55	0.75

■ Suggested pad layout

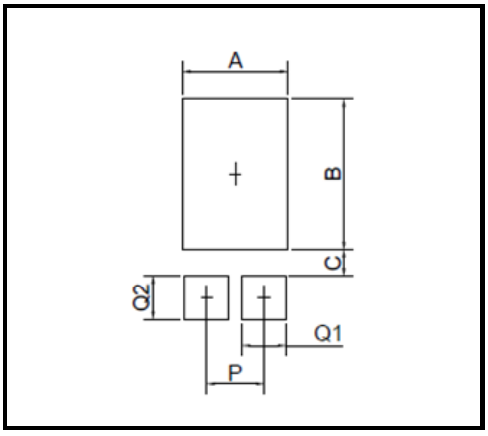

DIM	MIN.(mm)
A	3.36
B	4.86
C	0.85
P	1.84
Q1	1.40
Q2	1.40

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.
Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.