

Bridge Rectifiers

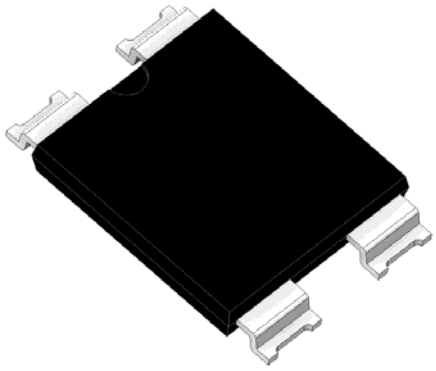



Features

- Glass passivated chip junction
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package**: YBS6
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen-free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (T_a=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	YBSN150005A	YBSN15001A	YBSN15002A	YBSN15004A	YBSN15006A	YBSN15008A	YBSN15010A
Device marking code			YBSN150005A	YBSN15001A	YBSN15002A	YBSN15004A	YBSN15006A	YBSN15008A	YBSN15010A
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, Tc=95℃	I_O	A	15						
Forward Surge Current (Non-repetitive)@60Hz Half-sine wave,1 cycle, Tj=25℃	I_{FSM}	A	350						
Forward Surge Current (Non-repetitive)@1ms, square wave, 1 cycle, Tj=25℃			700						
Current squared time @1ms≤t≤8.3ms Tj=25℃，Rating of per diode	I^2t	A^2s	508						
Storage temperature	T_{stg}	℃	-55 ~ +150						
Junction temperature	T_j	℃	-55 ~ +150						

■Electrical Characteristics（T_a=25℃ Unless otherwise specified）

PARAMETER	YMBO	UNIT	TEST CONDITIONS	YBSN150005A	YBSN15001A	YBSN15002A	YBSN15004A	YBSN15006A	YBSN15008A	YBSN15010A
Maximum instantaneous forward voltage drop per diode	V_F	V	I_{FM}=7.5A	1.0						
Maximum DC reverse current at rated DC blocking voltage per diode	I_R	μA	T_j =25℃	5						
			T_j =125℃	100						
Typical junction capacitance	Cj	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	110						

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER		SYMBOL	UNIT	YBSN150005A	YBSN15001A	YBSN15002A	YBSN15004A	YBSN15006A	YBSN15008A	YBSN15010A
Typical Thermal Resistance	Between Junction and Ambient	$R_{\theta J-A}$	℃/W	50						
	Between Junction and Lead	$R_{\theta J-L}$		10						
	Between Junction and Case	$R_{\theta J-C}$		2						

Note: Thermal Resistance mounted on P.C.B with 30mm*15mm*1.6mm

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YBSN150005A - YBSN15010A	F1	Approximate 0.96	1500	/	21000	13'' Reel

■ Characteristics (Typical)

FIG1:Io-Tc Curve




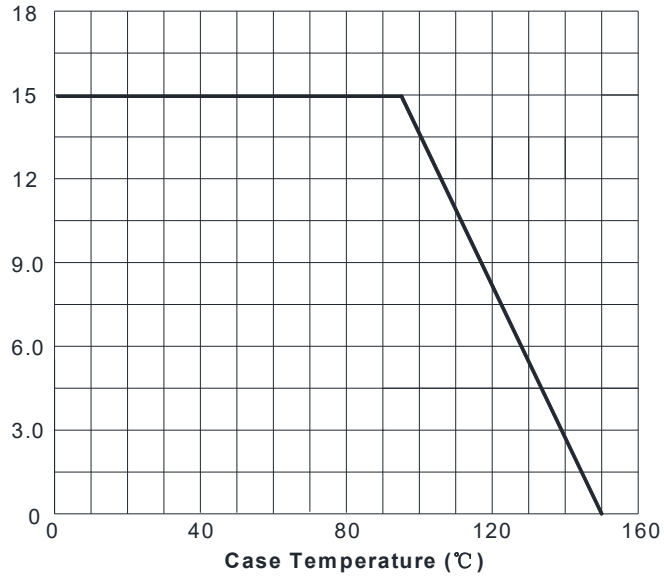



FIG2:Surge Forward Current Capability

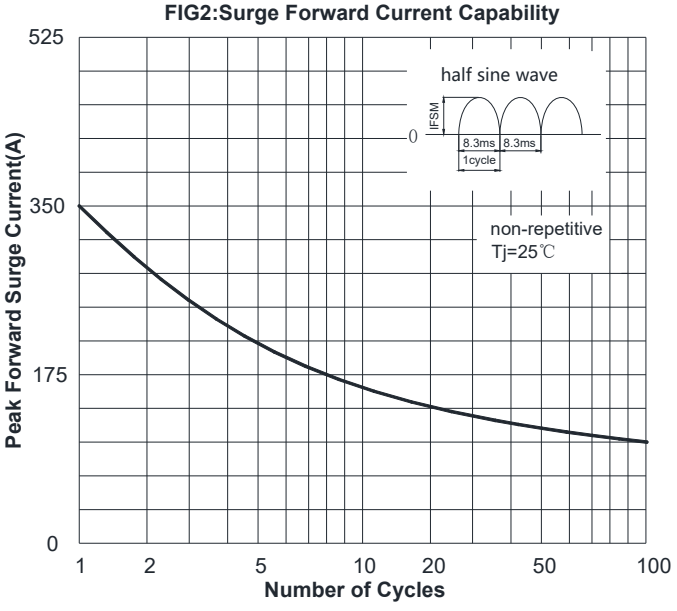

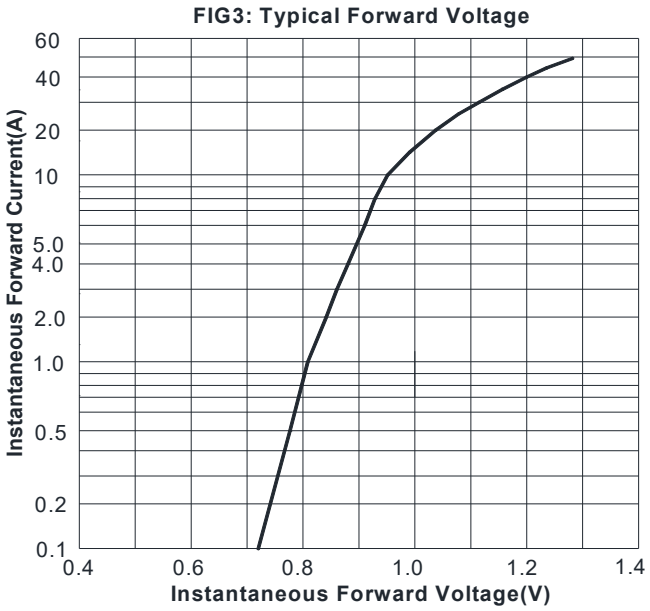

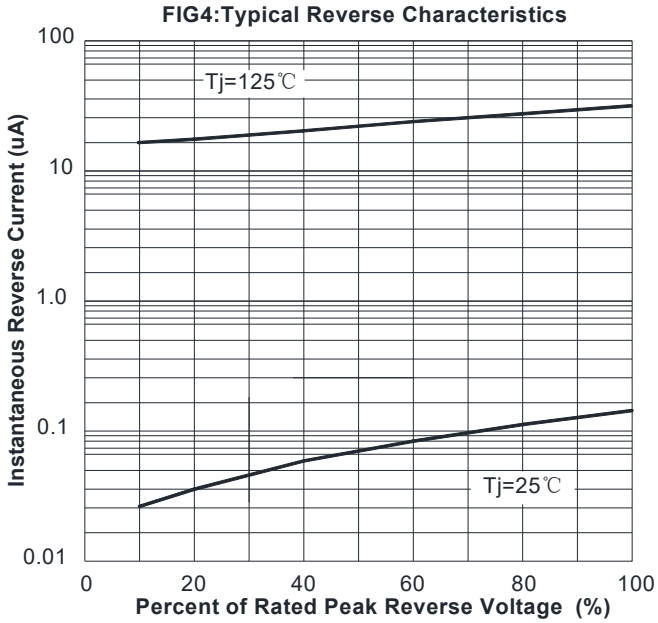


■ Outline Dimensions

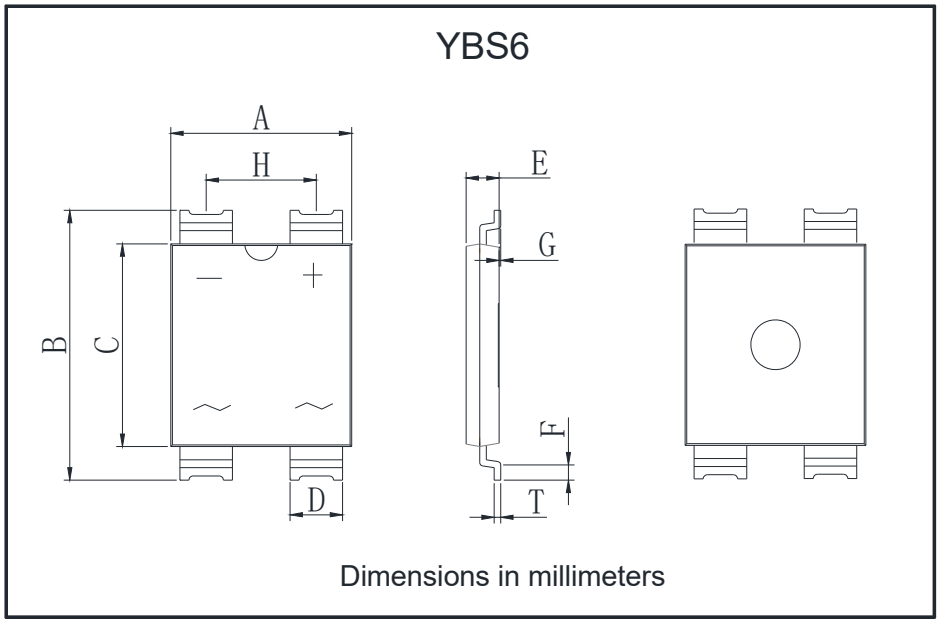

YBS6		
Dim	**Min**	**Max**
A	10.70	11.30
B	15.85	16.65
C	11.70	12.30
D	3.05	3.35
E	1.80	2.20
F	0.70	1.10
G	0	0.20
H	6.55	6.85
T	0.35	0.55

■ Suggested pad layout

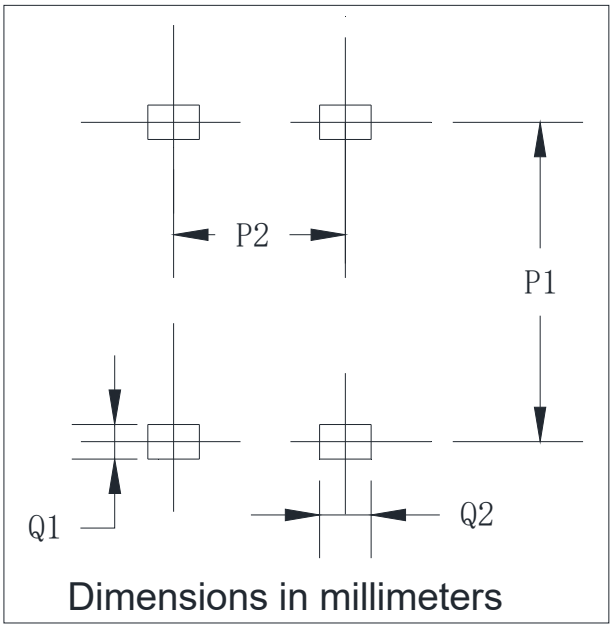

YBS6	
Dim	**Min**
P1	15.50
P2	6.70
Q1	1.00
Q2	3.20

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.