
Bridge Rectifiers

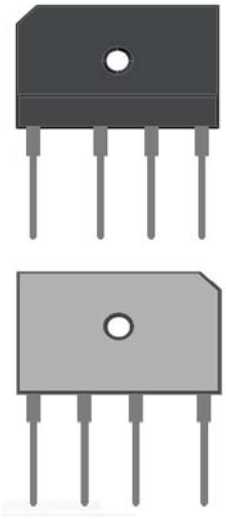

Features

- Thin single in-line package
- High surge current capability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Mechanical Data

- **Package**: PB
  Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free
- **Terminals**: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■Maximum Ratings (Ta=25℃ Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	YG50DD160
Device marking code				**YG50DD160**
Maximum Repetitive Peak Reverse Voltage		V_{RRM}	V	1600
Maximum RMS Voltage		V_{RMS}	V	1120
Maximum DC blocking Voltage		V_{DC}	V	1600
Average rectified output current @60Hz sine wave, R-load	With heatsink Tc =100℃	I_O	A	50*2
	Without heatsink Ta =25℃			15*2
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave,1 cycle, Tj=25℃		I_{FSM}	A	600
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, Tj=25℃				1200
Current squared time @1ms≤t≤8.3ms Tj=25℃		I^2t	A^2s	1494
Storage temperature		T_{stg}	℃	-55 ~ +150
Junction temperature		T_j	℃	-55 ~ +150
Dielectric strength @ Terminals to case, AC 1 minute		Vdis	KV	2.5
Mounting torque @Recommend torque：5kg·cm		Tor	kg·cm	8

■Electrical Characteristics（Ta=25℃ Unless otherwise specified）

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	YG50DD160
Maximum instantaneous forward voltage	V_F	V	I_{FM}=25A	1.05
Maximum DC reverse current at rated DC blocking voltage	I_R	μA	T_j=25℃	5
			T_j=125℃	1000

■Thermal Characteristics （T_a=25℃ Unless otherwise specified）

PARAMETER		SYMBOL	UNIT	YG50DD160
Thermal Resistance	Between junction and ambient, Without heatsink	$R_{\theta J-A}$	℃/W	18.0
	Between junction and lead, With heatsink	$R_{\theta J-L}$		5.0
	Between junction and case, With heatsink	$R_{\theta J-C}$		0.75

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YG50DD160	B1	Approximate 7.5	15	750	1500	TUBE

■ Characteristics (Typical)

FIG1:Io-Tc Curve

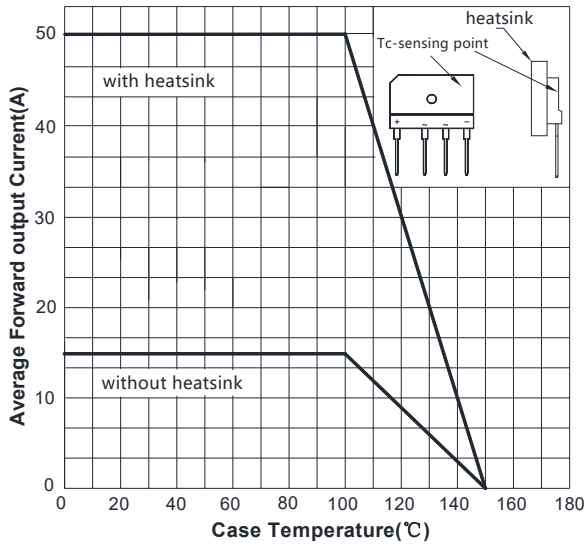


FIG2:Surge Forward Current Capability

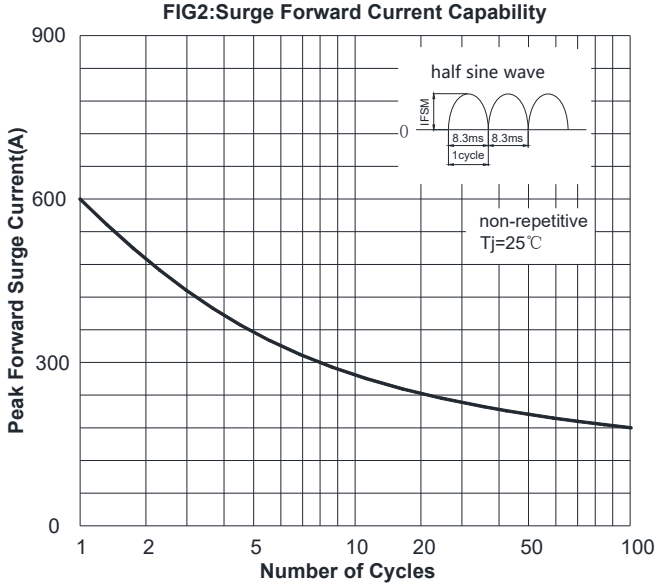


FIG3: Typical Forward Voltage



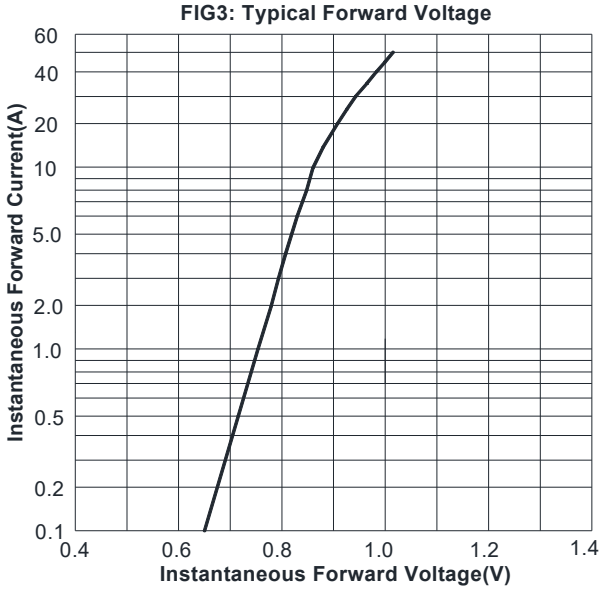



FIG4:Typical Reverse Characteristics

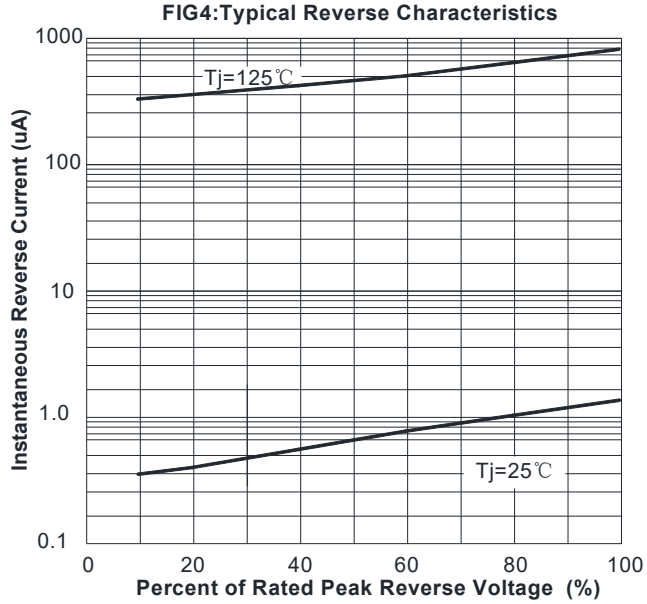

■ Electrical circuit diagram and structural diagram

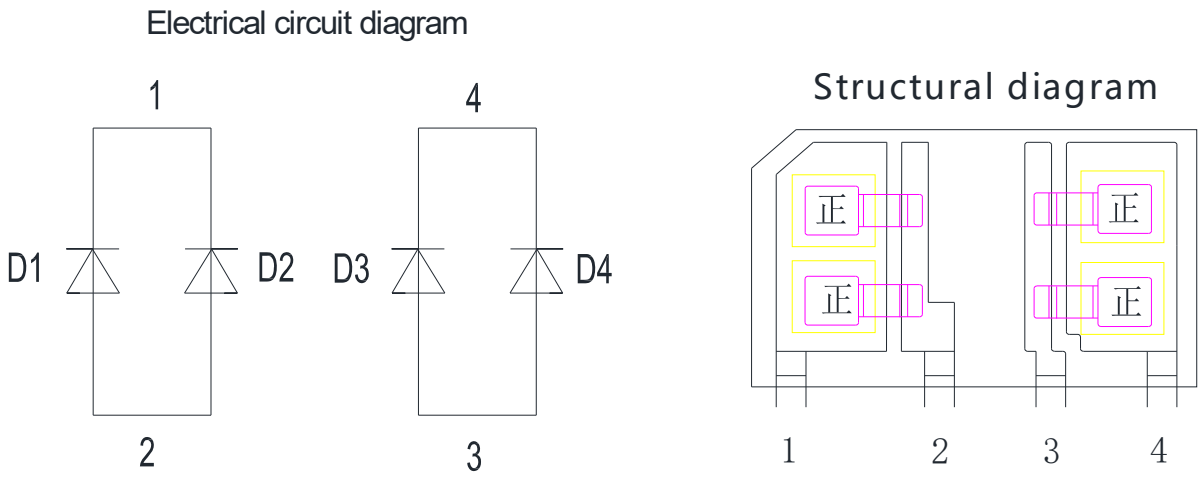

■ Outline Dimensions

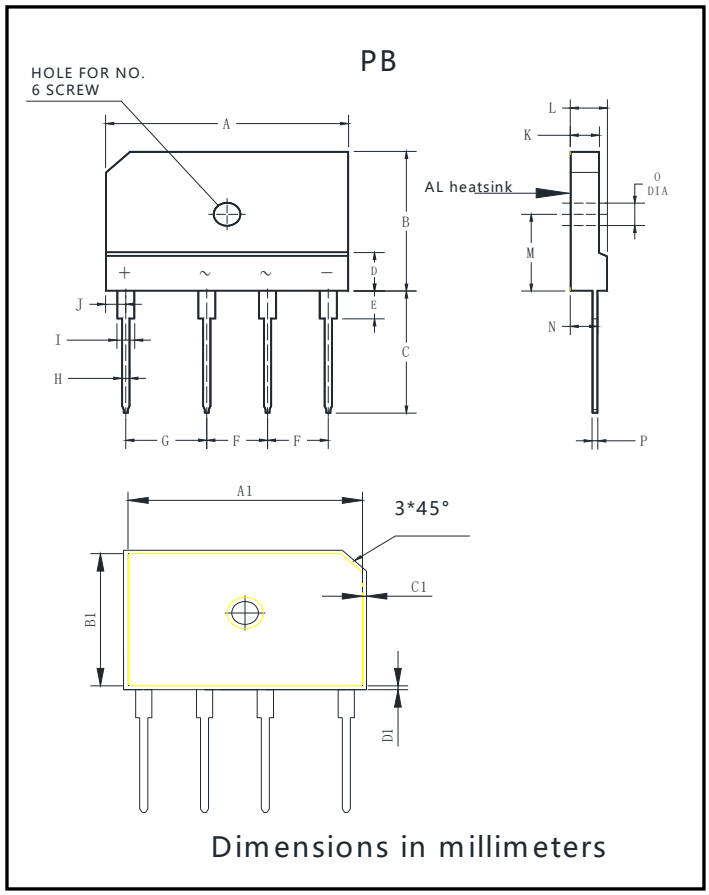

PB		
Dim	**Min**	**Max**
A	29.7	30.3
B	19.7	20.3
C	17.0	18.0
D	4.8	5.8
E	3.8	4.2
F	7.3	7.7
G	9.8	10.2
H	0.9	1.1
I	2.0	2.4
J	2.3	2.7
K	3.4	3.8
L	4.4	4.8
M	10.8	11.2
N	3.1	3.7
O	3.1	3.4
P	0.6	0.8
A1	28.75	29.15
B1	18.75	19.15
C1	0.3	0.7
D1	0.3	0.7

Notice

All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise. Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in STARSEA's terms and conditions of sale for such products, STARSEA assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of STARSEA products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.